



Workbook. **2020-2021**

second edition december

GENERAL INFORMATION

Our production started off and continues to be of an artisanal nature. Our lamps are not produced in large series, from moulds or sophisticated plants but they are hand-crafted by our artisans. Slight flaws are thus not to be considered defects, but rather the typical characteristics of manual work.

Catellani & Smith declares under its own responsibility that its products meet the essential requirements of EC directives and comply with EN 60598 for luminaires and related components. Catellani & Smith lamps are built with a voltage of 220/240V. The pricelist specifies which luminaires are compatible with a voltage of 110V (with standard EC components and not with UL certified components) and which ones can be compatible upon request, by making some styling and technical modifications (price estimate to be provided).

Production is tested 100%: each product undergoes a thorough quality control that guarantees it is intact and fully functional. The guarantee covers the item for 2 years from the date of purchase, including the right to a replacement or to the repair of the product or parts thereof affected by manufacturing defects detected at the time of purchase or that arise over the next two years. **The guarantee does not cover any damage to luminaires caused by connection to incompatible dimmers or control and dimming systems.** Compatibility of our products with dimmers or home automation systems must be checked prior to purchase and it is the responsibility of the customer or person acting for him/her.

The guarantee does not include any refunds for the intervention of qualified staff (electrician, etc.) or costs for the installation/disassembly or costs related to equipment (such as scaffolding access platforms, scaffolding, etc.) required to access the luminaires and perform maintenance and control operations on them. It is advisable always to test the luminaires on the ground before final installation if they are to be fitted under special circumstances or connected to control and dimming systems.

In compliance with the regulations in force, **the manufacturer reserves the right to make any styling or technical changes without prior notice.** Such changes also include the type and wattage of light bulbs and electronic parts. These changes are due to market availability issues since it is continuously growing and evolving, and it tends to eliminate certain products in favour of others, discontinuing their production without notice (which is increasingly often the case with LED bulbs).


The Catellani & Smith Workbook is designed to help and protect the customer in his/her choice of products. We therefore recommend that you read each section thoroughly, given the complexity of the electronic parts, and that you check the compatibility between the various components (such as dimmers, light sources, etc.) and contact qualified staff for the choice and installation of products.



Limited edition / Petits Bijoux / Petites Lentilles / Lederam / Sorry Giotto / Light Stick / Wa Wa / Atman / Giulietta / Jackie O / PostKrisi / Fil de Fer /
Lucenera / Stchu-Moon / Macchina della Luce / Luci d'Oro / Turciù / Oggetti Senza Tempo / Medousê / More / Sypha / Fil de Fer Outdoor / Other Smiths

Limited edition

p. 6



Trenta

Petits Bijoux

p. 6



28 Petits Bijoux



56 Petits Bijoux

Petites Lentilles

p. 8




22 Petites Lentilles

Lederam

p. 10



Lederam Manta S1



Lederam Manta S2



Lederam Manta CWS1



Lederam C150/180



Lederam C1



Lederam C2



Lederam W



Lederam WF



Lederam WB1



Lederam W1




Lederam W2




Lederam T1

Sorry Giotto

p. 20



Sorry Giotto 9



Sorry Giotto 12



Sorry Giotto 1



Sorry Giotto 3



Light Stick

p. 22




Light Stick CW



Light Stick V



Light Stick T



Light Stick F

Wa Wa

p. 24



Wa Wa T



Wa Wa F



Wa Wa W



Miss Stick



Uau T



Uau F

Atman

p. 28



Atman

Giulietta

p. 30



Giulietta BE T



Giulietta BE F



Giulietta W



Giulietta T



Giulietta F

Jackie O

p. 32




Jackie O JC



Jackie O IC




Jackie O Chand. 6/9/12



Jackie O Chand. 15/20/24

PostKrisi

p. 34



PostKrisi 50-51-52



PostKrisi 10 Malagolina



PostKrisi F 100



PostKrisi F 60



PostKrisi T 40



PostKrisi W 21-40-60



PostKrisi CW 70



PostKrisi 49



PostKrisi T 61



PostKrisi F 64



PostKrisi 65-66-67



PostKrisi Chandelier



PK/SL Chandelier



PostKrisi W 71

Fil de Fer

p. 44



Fil de Fer



Fil de Fer Nuvola



Fil de Fer Ovale



Fil de Fer CW Ovale



Fil de Fer F



Sweet Light Chandelier



Sweet Light T



Uomo della Luce S

Lucenera

p. 48



Lucenera 200



Lucenera 500



Lucenera 504



Lucenera 502



Lucenera 503



Lucenera 506



Lucenera 206



Lucenera 202



Lucenera 207



Lucenera 208

Stchu-Moon

p. 54



Stchu-Moon 02 230V



Stchu-Moon 02




Stchu-Moon 02 Chandel.



Stchu-Moon 05



Stchu-Moon 06



Stchu-Moon R



Stchu-Moon 08



Stchu-Moon 09



Stchu-Moon 01



Macchina della Luce

p. 60



mod. A




mod. B




mod. C



mod. D



mod. E



mod. F




mod. I




W mod. I




W mod. C



Malagola 27/55/110



Gold Moon JC/IC



Gold Moon Chandelier




DiscO



Telchisugiò



Luna W



Luna Piena



Full Moon




Francesca



Luce d'Oro T



Luce d'Oro F



Luna



Gemma



Colonna



Pepita



Turciù 36



Turciù 21



Turciù 16



Turciù 9



Turciù 9



Turciù 5



Turciù 3



Turciù 2



Bonsai



Sottovento



Albero della Luce



Oggetti Senza Tempo

p. 80



EC 301



U. F Up



U. W



U. F Flex



U. W Flex



Vi. F



Vi. W



Ciclotalia Flex C6



Ciclotalia Flex W1



Ciclotalia Flex W2



Ciclotalia Flex F3



Ciclotalia T



Ciclotalia F



Lola T



Lola F



Herem T



Ametista



Luce che dipinge



Miracolo



Nike



Shadow

Medousê (outdoor)

p. 92



Medousê W



Medousê F

More (outdoor)

p. 94



More



More O



More F

Sypha

p. 96



Syphasera



Syphasera



Syphaduepassi



Fil de Fer

p. 98



Fil de Fer



Fil de Fer F



Uomo della Luce XXL

Other Smiths

p. 100



Alchemie T

Technical information

p. 103

Mains voltage LED	p. 104
Lederam: colour combinations and details	p. 106
Chandelier	p. 108
Macchina della Luce LED boards	p. 110
Stchu-Moon LED boards	p. 111
Outdoor: Gel box system	p. 112

Outdoor: Quick connectors system	p. 113
Outdoor accessories	p. 114
Medousê installation suggestions	p. 115
Installation suggestions for Sypha/More	p. 116
PSU (Power Supply Unit) Kits	p. 118
Dimming wiring diagrams	p. 119




Limited edition

[*Finishes*] // **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. It may oxidise, therefore regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website).

p. 13



Trenta / battery table lamp


		battery	source	type	watt	lumen	K	CRI	en. class	battery charger	dimming
TRENTA / glass bulb / brass-coated cover / burnished iron pedestal	€ 1.550,00	Li-ION 3,7V 1180 mAh	constant voltage	LED	1x1W	100	2700	80	A+	input 110/240V output 5V@1,2 A (EU plug only)	NO on/off switch included

Petits Bijoux

[*Finishes*] // **Satin brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installationtt.

p. 17



28 Petits Bijoux / pendant lamp


		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PB28 / satin brass rings / white base / transparent covers with brass clips	€ 4.545,00	110V* or 240V	constant voltage 24V LED	interch. LED board	28x1W 28W	4004	2700	>80	A++	constant voltage driver	YES IGBT/Triac*

*110V version available with white base Ø 21x10,5 cm

weight 6 kg



p. 21

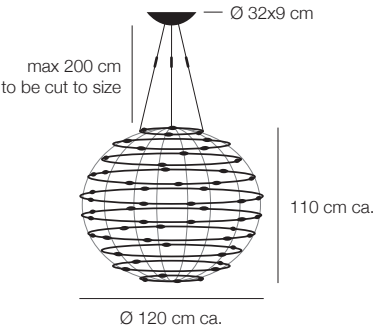

56 Petits Bijoux / pendant lamp

PB56 / satin brass rings / white base / transparent covers with brass clips	€ 7.650,00	110V or 240V	constant voltage 24V LED	interch. LED board	56x1W 56W	8008	2700	>80	A++	constant voltage driver	YES IGBT/Triac*
---	------------	--------------	--------------------------	--------------------	-----------	------	------	-----	-----	-------------------------	-----------------


weight 13 kg

Petites Lentilles

[*Finishes*] // **Satin brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) The remote control provided allows to switch on and dim independently the LED strip on the base and the LEDs on the oval. The system (we use Casambi) can be programmed and controlled also via app.

p. 25

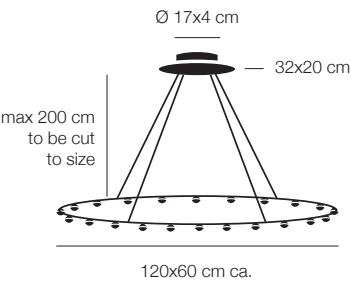

22 Petites Lentilles / pendant lamp

PL22 / satin brass oval / white base / transparent lens with brass holder	€ 3.650,00	240V (110V av. on request)	constant voltage 24V LED	interch. LED board	22x1W 22W	3146	2700	>80	A++	constant voltage driver	wireless independent (remote control incl.)*
				low voltage LED strip (directed upwards)	4W	150					


weight 3,6 kg



Lederam

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) Mains voltage LED modules and COB LED are dimmable using IGBT (trailing edge) dimmers designed specifically for LED sources. Their dimming is extremely delicate: incompatible dimmers may cause irreparable damage to the LED. Some dimmers on the market have a NO button (Normally Open) or are specific connector socket-mounted or recessed. They are generally inserted into junction boxes; their limited thickness facilitates the installer's task and makes the dimmer fit for installation even in shallow boxes. Dimmers with an integrated radio dimmer for both manual (NO button) and wireless control are also available. It is important to note that during adjustment the dimming appears less precise, with some flickering. Furthermore some types of dimmer, even if they have been recommended by the manufacturers themselves, have visible flickering (almost essentially down to a minimum) depending on the mains and on the type of interference present. The problem can be solved by increasing the minimum value setting of the potentiometer on the dimmer. Low voltage DALI or 1...10V versions available on request.

p. 28

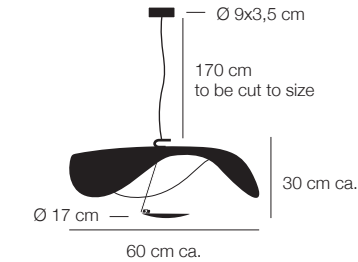


Lederam Manta S1 / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LS13 / shade black/gold / black rod / gold disc / black base	€ 755,00	110V or 240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
LS14 / shade black/copper / black rod / copper disc / black base	€ 755,00										
LS15 / shade white/white / gold rod / white disc / white base	€ 655,00										
LS16 / shade white/gold / satin rod / white disc / white base	€ 755,00										
LS18 / shade white/white / satin rod / white disc / white base	€ 655,00										
LS110 / shade white/white / white rod / white disc / white base	€ 655,00										

weight 2 kg

p. 31

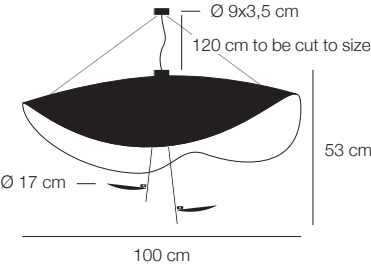


Lederam Manta S2 / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LS23 / shade black/gold / black rods / gold discs / black bases	€ 1.790,00	110V or 240V	mains voltage LED	LED module	2x17W 34W	3400	2700	> 80	A+	-	YES*
LS24 / shade black/copper / black rods / copper discs / black bases	€ 1.790,00										
LS25 / shade white/white / gold rods / white discs / white bases	€ 1.640,00										
LS26 / shade white/gold / satin rods / white discs / white bases	€ 1.790,00										
LS28 / shade white/white / satin rods / white discs / white bases	€ 1.640,00										

weight 5,5 kg

p. 32

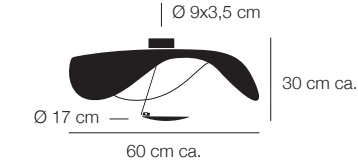


Lederam Manta CWS1 / ceiling or wall lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LCWS13 / shade black/gold / black rod / gold disc / black base	€ 695,00	110V or 240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
LCWS14 / shade black/copper / black rod / copper disc / black base	€ 695,00										
LCWS15 / shade white/white / gold rod / white disc / white base	€ 595,00										
LCWS16 / shade white/gold / satin rod / white disc / white base	€ 695,00										
LCWS18 / shade white/white / satin rod / white disc / white base	€ 595,00										
LCWS110 / shade white/white / white rod / white disc / white base	€ 595,00										




p. 33



Lederam C150 / ceiling lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LC1503 / shade black/gold / black rod / gold disc / black base	€ 480,00	110V or 240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
LC1504 / shade black/copper / black rod / copper disc / black base	€ 480,00										
LC1505 / shade white/white / gold rod / white disc / white base	€ 380,00										
LC1506 / shade white/gold / satin rod / white disc / white base	€ 480,00										
LC1508 / shade white/white / satin rod / white disc / white base	€ 380,00										
LC15010 / shade white/white / white rod / white disc / white base	€ 380,00										


p. 33



Lederam C180 / ceiling lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LC1803 / shade black/gold / black rod / gold disc / black base	€ 760,00	110V or 240V	mains voltage LED	COB LED	1x30W	2190	2700	90	A+	-	YES*
LC1804 / shade black/copper / black rod / copper disc / black base	€ 760,00										
LC1805 / shade white/white / gold rod / white disc / white base	€ 610,00										
LC1806 / shade white/gold / satin rod / white disc / white base	€ 760,00										
LC1808 / shade white/white / satin rod / white disc / white base	€ 610,00										
LC18010 / shade white/white / white rod / white disc / white base	€ 610,00										


p. 36



Lederam C1 / ceiling lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LC12 / black disc / satin rod / black base	€ 340,00	110V or 240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
LC13 / gold disc / black rod / black base	€ 370,00										
LC14 / copper disc / black rod / black base	€ 370,00										
LC15 / white disc / gold rod / white base	€ 340,00										
LC16 / white disc / satin rod / white base	€ 340,00										

p. 37




Lederam C2 / ceiling lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LC22 / black discs / satin rods / black base	€ 570,00	110V or 240V	mains voltage LED	LED module	2x17W 34W	3400	2700	> 80	A+	-	YES*
LC23 / gold discs / black rods / black base	€ 630,00										
LC24 / copper discs / black rods / black base	€ 630,00										
LC25 / white discs / gold rods / white base	€ 570,00										
LC26 / white discs / satin rods / white base	€ 570,00										




p. 39



Lederam W 17 / wall lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LW171 / disc D1 black/copper - disc D2 copper/black / black base	€ 305,00	110V or 240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
LW172 / disc D1 black/gold - disc D2 gold/black / black base	€ 305,00										
LW173 / disc D1 gold/gold - disc D2 gold/white / white base	€ 335,00										
LW174 / disc D1 copper/copper - disc D2 copper/white / white base	€ 335,00										
LW175 / disc D1 white/gold - disc D2 gold/white / white base	€ 305,00										
LW176 / disc D1 white/copper - disc D2 copper/white / white base	€ 305,00										


p. 39



Lederam W 25 / wall lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LW251 / discs D1 black/copper - disc D2 copper/black / black base	€ 360,00	110V or 240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
LW252 / discs D1 black/gold - disc D2 gold/black / black base	€ 360,00										
LW253 / discs D1 gold/gold - disc D2 gold/white / white base	€ 400,00										
LW254 / discs D1 copper/copper - disc D2 copper/white / white base	€ 400,00										
LW255 / discs D1 white/gold - disc D2 gold/white / white base	€ 360,00										
LW256 / discs D1 white/copper - disc D2 copper/white / white base	€ 360,00										


p. 40



Lederam WF 17 / wall lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LWF171 / black disc / black base	€ 195,00	110V or 240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
LWF173 / gold/white disc / white base	€ 225,00										
LWF174 / copper/white disc / white base	€ 225,00										
LWF176 / white disc / white base	€ 195,00										

p. 40




Lederam WF 25 / wall lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LWF251 / black disc / black base	€ 250,00	110V or 240V	mains voltage LED	LED module	1x28W	2580	2700	80	A+	-	YES*
LWF253 / gold/white disc / white base	€ 290,00										
LWF254 / copper/white disc / white base	€ 290,00										
LWF256 / white disc / white base	€ 250,00										




p. 41



Lederam WB1 / wall lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LWB12 / black disc / satin rod / black base	€	310,00		110V or 240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
LWB13 / gold disc / black rod / black base	€	340,00											
LWB14 / copper disc / black rod / black base	€	340,00											
LWB15 / white disc / gold rod / white base	€	310,00											
LWB16 / white disc / satin rod / white base	€	310,00											


Available on request with disc on the right.

p. 43




Lederam W1 17 / wall lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LW1171 / black disc / black base	€	235,00		110V or 240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
LW1173 / gold/black disc / black base	€	265,00											
LW1174 / copper/black disc / black base	€	265,00											
LW1176 / white disc / white base	€	235,00											

p. 43



Lederam W1 25 / wall lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LW1251 / disc Ø 25 cm black / black base	€	290,00		110V or 240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
LW1253 / disc Ø 25 cm gold/black / black base	€	330,00											
LW1254 / disc Ø 25 cm copper/black/ black base	€	330,00											
LW1256 / disc Ø 25 cm white / white base	€	290,00											


p. 45



Lederam W2 / wall lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LW22 / black discs / satin rods / black base	€	570,00		110V or 240V	mains voltage LED	LED module	2x17W 34W	3400	2700	> 80	A+	-	YES*
LW23 / gold discs / black rods / black base	€	630,00											
LW24 / copper discs / black rods / black base	€	630,00											
LW25 / white discs / gold rods / white base	€	570,00											
LW26 / white discs / satin rods / white base	€	570,00											




p. 47



Lederam T1 / table lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LT12 / black disc / satin rod / black base/cable/dimmer	€ 485,00	240V (110V available with on/off)	mains voltage LED	LED module	1x17W	1400	2700	80	A+	-	included (memory 0%)
LT13 / gold disc / black rod / black base/cable/dimmer	€ 515,00										
LT14 / copper disc / black rod / black base/cable/dimmer	€ 515,00										
LT15 / white disc / gold rod / white base/cable/dimmer	€ 485,00										
LT16 / white disc / satin rod / white base/cable/dimmer	€ 485,00										


p. 48

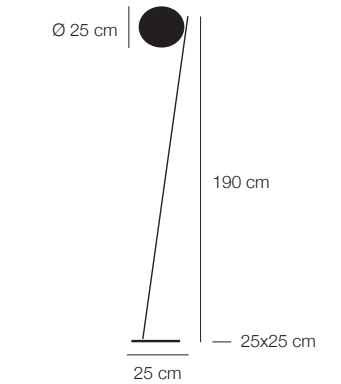

Lederam F0 / standing lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LF012 / brass disc / black rod / black base/cable/dimmer	€ 1.030,00	110V or 240V	mains voltage LED	COB LED	1x30W	2190	2700	90	A+	-	included (memory last step)
LF02 / black disc / satin rod / black base/cable/dimmer	€ 770,00										
LF03 / gold disc / black rod / black base/cable/dimmer	€ 800,00										
LF04 / copper disc / black rod / black base/cable/dimmer	€ 800,00										
LF06 / white disc / satin rod / white base/cable/dimmer	€ 770,00										


p. 49



Lederam F1 / standing lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LF12 / black disc / satin rod / black base/cable/dimmer	€ 660,00	110V or 240V	mains voltage LED	LED module	1x17W	1400	2700	80	A+	-	included (memory last step)
LF13 / gold disc / black rod / black base/cable/dimmer	€ 690,00										
LF14 / copper disc / black rod / black base/cable/dimmer	€ 690,00										
LF15 / white disc / gold rod / white base/cable/dimmer	€ 660,00										
LF16 / white disc / satin rod / white base/cable/dimmer	€ 660,00										

p. 50




Lederam F2 / standing lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LF22 / black discs / satin rods / black base/cable/dimmer	€ 905,00	240V (110V available with on/off)	mains voltage LED	LED module	2x17W 34W	3400	2700	> 80	A+	-	included (memory last step)
LF23 / gold discs / black rods / black base/cable/dimmer	€ 965,00										
LF24 / copper discs / black rods / black base/cable/dimmer	€ 965,00										
LF25 / white discs / gold rods / white base/cable/dimmer	€ 905,00										
LF26 / white discs / satin rods / white base/cable/dimmer	€ 905,00										



p. 52



Lederam F3 / standing lamp


		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LF32 / black discs / satin rod / black base/cable/dimmer	€ 1.000,00	240V (110V available with on/off)	mains voltage LED	LED module	3x17W 51W	5100	2700	> 80	A+	-	included (memory last step)
LF33 / gold discs / black rod / black base/cable/dimmer	€ 1.090,00										
LF34 / copper discs / black rod / black base/cable/dimmer	€ 1.090,00										
LF35 / white discs / gold rod / white base/cable/dimmer	€ 1.000,00										
LF36 / white discs / satin rod / white base/cable/dimmer	€ 1.000,00										

Sorry Giotto

[*Finishes*] // **Hand painting** is chosen for its deliberate textured effect and uniqueness of result. Any irregularities or unevenness in the coating cannot be considered defect, but rather a hallmark of the artisanal crafting process. / **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*****) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.


p. 58



Sorry Giotto 9 / 12 / pendant lamp with floor connection

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
SG9 / ring Ø 90 cm blue / black anvil / blue wires / black dimmer	€ 1.830,00	110-240V	constant current LED 350 mA	interch. LED	12x1W 12W	1200	2700	80	A+	constant current plug driver*	included (memory last step)
SG12 / ring Ø 120 cm blue / black anvil / blue wires / black dimmer	€ 2.620,00				15x1W 15W	1500					

p. 59




Sorry Giotto 1 / table lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
SG1 / blue ring / rough iron base / blue wire / nickel/black dimmer	€ 640,00	220-240V (EU plug only)	constant current LED 350 mA	interch. LED	4x1W 4W	400	2700	80	A+	constant current plug driver (EU plug only)	included (memory 100%)
SG1PL / blue ring / rough iron base / blue wire / nickel/black dimmer	€ 640,00	110-240V (all other plugs)	constant current LED 350 mA	interch. LED	4x1W 4W	400	2700	80	A+	constant current plug driver (all other plugs)*	included (memory last step)



p. 60



Sorry Giotto 3 / standing lamp


		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
SG3 / blue rings / black base and stem / blue wires / black dimmer	€ 2.770,00	110-240V	constant current LED 350 mA	interch. LED	16x1W 16W	1600	2700	80	A+	constant current plug driver*	included (memory last step)

Light Stick

[*Finishes*] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*****) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation. / (******) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 65




Light Stick CW / wall or ceiling lamp

LSP4 / nickel rod and base	€	545,00	240V (110V available with not dimmable driver)	constant current LED 350 mA	interch. LED	4x1W 4W	400	2700	80	A+	constant current driver	YES IGBT/Triac*
LSP4G / satin gold rod and base	€	645,00				6x1W 6W	600					
LSP6 / nickel rod and base	€	710,00										
LSP6G / satin gold rod and base	€	830,00										
LSP8 / nickel rod and base	€	875,00	240V (110V available on request)	constant current LED 350 mA	interch. LED	8x1W 8W	800	2700	80	A+	constant current driver	YES IGBT/Triac*
LSP8G / satin gold rod and base	€	1.015,00										

base Ø 9x3,5 cm / H ledge 17 cm

p. 66




Light Stick V / wall lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LSPV6 / nickel vertical rod and base	€ 710,00	240V (110V available with not dimmable driver)	constant current LED 350 mA	interch. LED	6x1W 6W	600	2700	80	A+	constant current driver	YES IGBT/Triac*
LSPV6G / satin gold vertical rod and base	€ 830,00										

H ledge 17 cm




p. 67



Light Stick T / table lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LS6 / nickel rod / black base / black cable / nickel/black dimmer	€ 715,00	110-240V	constant current LED 350 mA	interch. LED	6x1W 6W	600	2700	80	A+	constant current plug driver**	included (memory last step)
LS6G / satin gold rod / black base / black cable / black dimmer	€ 835,00										

p. 69



Light Stick F / standing lamp


		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LSF10B / black rod / black base / black wires / black dimmer	€ 940,00	110-240V	constant current LED 350 mA	interch. LED	10x1W 10W	1000	2700	80	A+	constant current plug driver**	included (memory last step)
LSF10 / nickel rod / black base / black wires / black dimmer	€ 1.185,00										
LSF10G / satin gold rod / black base / black wires / black dimmer	€ 1.365,00										

Wa Wa

[*Finishes*] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Copper** is a very malleable and ductile metal, chosen for its high thermal and electrical conductivity, as well as for its typical reddish-orange colour. We use it untreated, therefore it may oxidise with time, forming a green patina. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*****) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation. / (******) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 72



Wa Wa T / table lamp


		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
WW / nickel structure, base and sticks / glass lens / blue wires / nickel/black dimmer	€ 740,00	110-240V	constant current LED 350 mA	interch. LED	3x1W 3W	300	2700	80	A+	constant current plug driver**	included (memory last step)



IVA / VAT excl.




p. 74



base cod. WWF: 20x20 cm
base cod. WWFBR: 16x16 cm

Wa Wa F / standing lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
WWF / nickel structure, base and sticks / glass lens / black wires / black dimmer	€ 1.640,00	110-240V	constant current LED 350 mA	interch. LED	5x1W 5W	500	2700	80	A+	constant current plug driver**	included (memory last step)
WWFBR / brass base and structure / copper sticks / glass lens / black wires / black dimmer	€ 1.640,00										


p. 76



Wa Wa W / wall lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
WWP / nickel structure, base and sticks / glass lens / blue wires	€ 670,00	240V (110V available not dimmable)	constant current LED 350 mA	interch. LED	3x1W 3W	300	2700	80	A+	constant current driver	YES IGBT/Triac*


H ledge 26 cm

p. 77



Miss Stick / table lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
MS / nickel structure and base / glass lens / blue wire / nickel/black dimmer	€ 410,00	110-240V	constant current LED 350 mA	interch. LED	1x1W	100	2700	80	A+	constant current plug driver**	included (memory last step)


p. 78



Uau T / table lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
UAU / nickel structure and base / glass lens / blue wire / nickel/black dimmer	€ 440,00	110-240V	constant current LED 350 mA	interch. LED	1x1W	100	2700	80	A+	constant current plug driver**	included (memory last step)



p. 79




Uau F / standing lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
UAUF / nickel structure and base / glass lens / blue wire / nickel/black dimmer	€ 560,00	110-240V	constant current LED 350 mA	interch. LED	1x1W	100	2700	80	A+	constant current plug driver**	included (memory last step)

Atman

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 82



Atman / table lamp


		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
AT / oval crystal glass / nickel base / blue wire / nickel/black dimmer	€ 1.155,00	220-240V (EU plug only)	constant current LED 350 mA	interch. LED	1x1W	100	2700	80	A+	constant current plug driver (EU plug only)	included (memory 100%)
ATPL / oval crystal glass / nickel base / blue wire / nickel/black dimmer	€ 1.155,00	110-240V (all other plugs)	constant current LED 350 mA	interch. LED	1x1W	100	2700	80	A+	constant current plug driver (all other plugs)*	included (memory last step)



Giulietta


[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website).

p. 87




Giulietta BE T / battery table lamp				battery	source	type	watt	lumen	K	CRI	en. class	battery charger	dimmer
GBB / black hoop and base / brass rod				Li-ION 3,7V 4100 mAh	constant voltage	LED board	1x2,8W	283	2700	>90	A+	input 110/240V output 5V@1,2 A (EU plug only)	included touch
GBBR / vintage brass hoop and base / brass rod													
		€	495,00										
		€	595,00										

p. 88

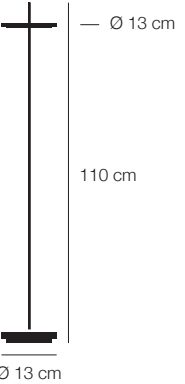

Giulietta BE F / battery standing lamp				battery	source	type	watt	lumen	K	CRI	en. class	battery charger	dimmer
GBFB / black hoop and base / brass rod				Li-ION 3,7V 4100 mAh	constant voltage	LED board	1x2,8W	283	2700	>90	A+	input 110/240V output 5V@1,2 A (EU plug only)	included touch
GBFBR / vintage brass hoop and base / brass rod													

p. 90




Giulietta W / wall lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming	
GPB / black structure / black hoop				€ 365,00	110V or 240V	constant voltage LED 5V	LED board	1x2,8W	283	2700	>90	A+	constant voltage driver	included touch-less (memory last step)
GPNC / black structure / nickel hoop				€ 380,00										



IVA / VAT excl.




p. 91



Giulietta T / USB table lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
GB / black structure / black hoop / black wire	€ 375,00	110-240V	constant voltage LED 5V	LED board	1x2,8W	283	2700	>90	A+	USB plug driver 5V (EU plug only)	included touch-less (memory last step)
GNC / black structure / nickel hoop / black wire	€ 390,00										

p. 93



Giulietta F / USB standing lamp


		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
GFB / nickel base and rod / black flex / black hoop / black wire	€ 810,00	110-240V	constant voltage LED 5V	LED board	1x2,8W	283	2700	>90	A+	USB plug driver 5V (EU plug only)	included touch-less (memory last step)
GFNC / nickel base and rod / black flex / nickel hoop / black wire	€ 825,00										

Jackie O

[*Finishes*] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Satin steel** - the standard modular metal bases are composed of a satin steel plate mounted on a white lacquered metal frame and fixed to it by nickel square-head screws. On request we can supply the plate white matt lacquered as the frame.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*****) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

p. 97

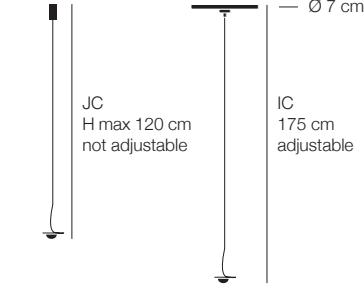


Jackie O JC / IC / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
JOJC / mod. JC / nickel jack connection / blue wire / nickel curl	€ 195,00	-	constant current LED 350 mA	LED Jack/interch.	1x1W	100	2700	80	A+	not included available on request	-
JOIC / mod. IC / nickel plate with tensioner / blue wire / nickel curl	€ 185,00			interch. LED							

installation hole Jackie O JC Ø 1,25 cm
installation hole Jackie O IC Ø 5,5 cm




p. 98



Jackie O Chandelier 6 / 9 / 12 / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
JO6Q / satin steel base 30x30 cm / blue wires / nickel curls	€	1.590,00	230V (110V available 1...10V/Push dimm.)	LED Jack/interch.	6x1W 6W	600	2700	80	A+	constant current driver	YES IGBT/Triac*
JO9Q / satin steel base 30x30 cm / blue wires / nickel curls	€	2.175,00			9x1W 9W	900					
JO12Q / satin steel base 30x30 cm / blue wires / nickel curls	€	2.670,00			12x1W 12W	1200					

p. 98



Jackie O Chandelier 15 / 20 / 24 / pendant lamp


Jackie O Chandelier 15 / 20 / 24 / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
JO15Q / satin steel base 60x60 cm / blue wires / nickel curls	€	3.270,00	110V or 240V	constant current LED 350 mA	LED Jack/interch.	15x1W 15W	1500	2700	80	A+	constant current driver	YES IGBT/Triac*
JO15R / satin steel base 150x30 cm / blue wires / nickel curls	€	3.270,00										
JO20Q / satin steel base 60x60 cm / blue wires / nickel curls	€	4.140,00										
JO20R / satin steel base 150x30 cm / blue wires / nickel curls	€	4.140,00										
JO24Q / satin steel base 60x60 cm / blue wires / nickel curls	€	4.790,00										
JO24R / satin steel base 150x30 cm / blue wires / nickel curls	€	4.790,00										

PostKrisi

[*Finishes*] // **Hand painting** is chosen for its deliberate textured effect and uniqueness of result. Any irregularities or unevenness in the coating cannot be considered defect, but rather a hallmark of the artisanal crafting process. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Copper** is a very malleable and ductile metal, chosen for its high thermal and electrical conductivity, as well as for its typical reddish-orange colour. We use it untreated, therefore it may oxidise with time, forming a green patina. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Satin steel** - the standard modular metal bases are composed of a satin steel plate mounted on a white lacquered metal frame and fixed to it by nickel square-head screws. On request we can supply the plate white matt lacquered as the frame.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*****) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / (******) Mains voltage LED modules and COB LED are dimmable using IGBT (trailing edge) dimmers designed specifically for LED sources. Their dimming is extremely delicate: incompatible dimmers may cause irreparable damage to the LED. Some dimmers on the market have a NO button (Normally Open) or are specific connector socket-mounted or recessed. They are generally inserted into junction boxes; their limited thickness facilitates the installer's task and makes the dimmer fit for installation even in shallow boxes. Dimmers with an integrated radio dimmer for both manual (NO button) and wireless control are also available. It is important to note that during adjustment the dimming appears less precise, with some flickering. Furthermore some types of dimmer, even if they have been recommended by the manufacturers themselves, have visible flickering (almost essentially down to a minimum) depending on the mains and on the type of interference present. The problem can be solved by increasing the minimum value setting of the potentiometer on the dimmer. Low voltage DALI or 1...10V versions available on request. / (*******) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 102



PostKrisi 50 / 51 / pendant lamp


		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK50LN / PostKrisi 50 / shade 85x35 cm natural / grey braided cable / nickel base	€	580,00	110V (bulb not supplied)-240V	mains voltage LED	E27 bulb	1x8W	2700	≥80	A++	-	YES IGBT/Triac*
PK50LW / PostKrisi 50 / shade 85x35 cm white / grey braided cable / nickel base	€	650,00									
PK50LG / PostKrisi 50 / shade 85x35 cm gold / grey braided cable / nickel base	€	825,00									
PK50LS / PostKrisi 50 / shade 85x35 cm silver / grey braided cable / nickel base	€	825,00									
PK51LN / PostKrisi 51 / shade 115x40 cm natural / grey braided cable / nickel base	€	830,00									
PK51LW / PostKrisi 51 / shade 115x40 cm white / grey braided cable / nickel base	€	900,00									
PK51LG / PostKrisi 51 / shade 115x40 cm gold / grey braided cable / nickel base	€	1.075,00									
PK51LS / PostKrisi 51 / shade 115x40 cm silver / grey braided cable / nickel base	€	1.075,00									

weight: PK50 1,5 kg / PK51 2,8 kg

Available on request with LED silver crowned bulb (code LLC31)



p. 102



PostKrisi 52 / pendant lamp


PK52LN / natural shade / grey braided cables / nickel base	€	1.130,00
PK52LW / white shade / grey braided cables / nickel base	€	1.290,00
PK52LG / gold shade / grey braided cables / nickel base	€	1.630,00
PK52LS / silver shade / grey braided cables / nickel base	€	1.630,00

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	≥80	A++	-	YES IGBT/Triac*

Available on request with LED silver crowned bulbs (code LLC31)

weight 3 kg

p. 105




PostKrisi 10 Malagolina / table lamp

PKM10LN / natural shade / nickel base and structure / blue wire / nickel/black dimmer	€	465,00
PKM10LW / white shade / nickel base and structure / blue wire / nickel/black dimmer	€	485,00
PKM10LG / gold shade / nickel base and structure / blue wire / nickel/black dimmer	€	515,00
PKM10LS / silver shade / nickel base and structure / blue wire / nickel/black dimmer	€	515,00

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 350 mA	interch. LED	2x1W 2W	200	2700	80	A+	constant current plug driver***	included (memory last step)

p. 106

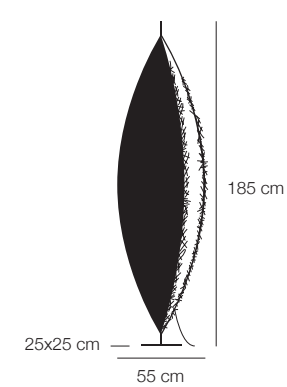


PostKrisi F 100 / standing lamp

PKF100W / white shade / nickel base and structure / black wires / black dimmer	€	2.075,00
PKF100G / gold shade / nickel base and structure / black wires / black dimmer	€	2.145,00
PKF100S / silver shade / nickel base and structure / black wires / black dimmer	€	2.145,00

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 350 mA	interch. LED	8x1W 8W	800	2700	80	A+	constant current plug driver***	included (memory last step)

p. 107

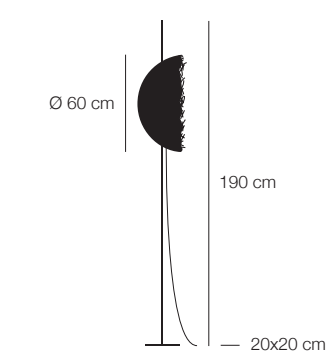


PostKrisi F 60 / standing lamp

PKF60LW / white shade / nickel base and structure / black wires / black dimmer	€	1.110,00
PKF60LG / gold shade / nickel base and structure / black wires / black dimmer	€	1.145,00
PKF60LS / silver shade / nickel base and structure / black wires / black dimmer	€	1.145,00

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 350 mA	interch. LED	3x1W 3W	300	2700	80	A+	constant current plug driver***	included (memory last step)




p. 108

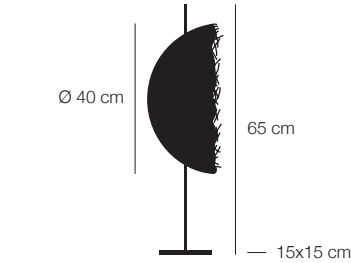

PostKrisi T 40 / table lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
PK40LW / white shade / nickel base and structure / blue wire / nickel/black dimmer	€ 745,00	110-240V	constant current LED 350 mA	interch. LED	2x1W 2W	200	2700	80	A+	constant current plug driver***	included (memory last step)
PK40LG / gold shade / nickel base and structure / blue wire / nickel/black dimmer	€ 765,00										
PK40LS / silver shade / nickel base and structure / blue wire / nickel/black dimmer	€ 765,00										

p. 109

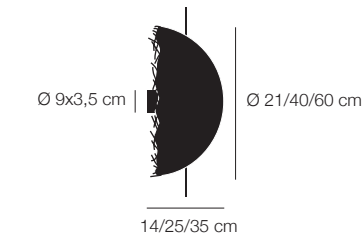


Ø 21 cm: rod H 22 cm
Ø 40 cm: rod H 60 cm
Ø 60 cm: rod H 80 cm

PostKrisi W 21 / 40 / 60 / wall lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PKP21LN / PostKrisi W 21 / shade Ø 21 cm natural / nickel base	€ 415,00	240V (110V available with not dimmable driver)	constant current LED 350 mA	interch. LED	2x1W 2W	200	2700	80	A+	constant current driver	NO av. on request
PKP21LW / PostKrisi W 21 / shade Ø 21 cm white / nickel base	€ 435,00										
PKP21LG / PostKrisi W 21 / shade Ø 21 cm gold / nickel base	€ 460,00										
PKP21LS / PostKrisi W 21 / shade Ø 21 cm silver / nickel base	€ 460,00										
PKP40LW / PostKrisi W 40 / shade Ø 40 cm white / nickel base	€ 610,00										
PKP40LG / PostKrisi W 40/ shade Ø 40 cm gold / nickel base	€ 630,00										
PKP40LS / PostKrisi W 40 / shade Ø 40 cm silver / nickel base	€ 630,00										
PKP60LW / PostKrisi W 60 / shade Ø 60 cm white / nickel base	€ 655,00										
PKP60LG / PostKrisi W 60 / shade Ø 60 cm gold / nickel base	€ 675,00										
PKP60LS / PostKrisi W 60 / shade Ø 60 cm silver / nickel base	€ 675,00										


p. 111



PostKrisi CW 70 / ceiling or wall lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PKCW7LG / gold shade	€ 1.180,00	110V or 240V	mains voltage LED	COB LED	1x30W	2190	2700	90	A+	-	YES**
PKCW7LS / silver shade	€ 1.180,00										

p. 113




PostKrisi 49 / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK494LWG / shade Ø 40 cm white/gold / white braided cable / white base	€ 555,00	110V (bulb not supplied)-240V	mains voltage LED	E27 bulb	1x8W	900	2700	≥80	A++	-	YES IGBT/Triac*
PK494LWS / shade Ø 40 cm white/silver / white braided cable / white base	€ 555,00										
PK496LWG / shade Ø 60 cm white/gold / white braided cable / white base	€ 715,00										
PK496LWS / shade Ø 60 cm white/silver / white braided cable / white base	€ 715,00										

Available on request with LED silver crowned bulb (code LLC31)



p. 103



PostKrisi 49 / pendant lamp


PK498LWG / shade Ø 80 cm white/gold / white braided cable / white base	€	1.030,00
PK498LWS / shade Ø 80 cm white/silver / white braided cable / white base	€	1.030,00
PK4910LWG / shade Ø 100 cm white/gold / white braided cable / white base	€	1.430,00
PK4910LWS / shade Ø 100 cm white/silver / white braided cable / white base	€	1.430,00

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	≥80	A++	-	YES IGBT/Triac*

Available on request with LED silver crowned bulbs (code LLC31)

weight: Ø 80 cm 2,8 kg / Ø 100 cm 3 kg

p. 115




PostKrisi T 61 / table lamp

PK61LN / natural shades / black base / brass rod / black cable and dimmer	€	795,00
PK61LNNC / natural shades / nickel rod and base / black cable and dimmer	€	795,00
PK61LW / white shades / black base / brass rod / black cable and dimmer	€	815,00
PK61LWNC / white shades / nickel rod and base / black cable and dimmer	€	815,00

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	≥80	A++	-	included (memory last step)

p. 116

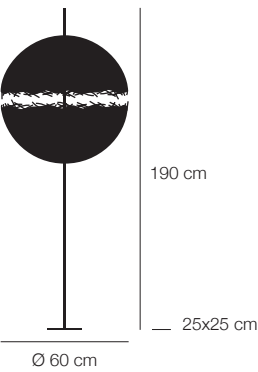


PostKrisi F 64 / standing lamp

PK64LN / natural shades / black base / brass rod / black cable and dimmer	€	1.005,00
PK64LNNC / natural shades / nickel rod and base / black cable and dimmer	€	1.005,00
PK64LW / white shades / black base / brass rod / black cable and dimmer	€	1.025,00
PK64LWNC / white shades / nickel rod and base / black cable and dimmer	€	1.025,00

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	≥80	A++	-	included (memory last step)

p. 118



PostKrisi 65 / pendant lamp


PK65LN / shades Ø 40 cm natural / brass structure / black cable and base	€	660,00
PK65LNNC / shades Ø 40 cm natural / nickel structure and base / black cable	€	660,00
PK65LW / shades Ø 40 cm white / brass structure / black cable and base	€	680,00
PK65LWNC / shades Ø 40 cm white / nickel structure and base / black cable	€	680,00

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	≥80	A++	-	YES IGBT/Triac*

H 200 cm / H rod 63 cm / weight 2,5 kg




IVA / VAT excl.



PostKrisi 66 / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK66LN / shades Ø 60 cm natural / brass structure / black cable and base	€ 960,00	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	≥80	A++	-	YES IGBT/Triac*
PK66LNNC / shades Ø 60 cm natural / nickel structure and base / black cable	€ 960,00										
PK66LW / shades Ø 60 cm white / brass structure / black cable and base	€ 980,00										
PK66LWNC / shades Ø 60 cm white / nickel structure and base / black cable	€ 980,00										


H 210 cm / H rod 83 cm / weight 3,5 kg



PostKrisi 67 / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK67LN / shades Ø 80 cm natural / brass structure / black cable and base	€ 1.880,00	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	≥80	A++	-	YES IGBT/Triac*
PK67LNNC / shades Ø 80 cm natural / nickel structure and base / black cable	€ 1.880,00										
PK67LW / shades Ø 80 cm white / brass structure / black cable and base	€ 1.900,00										
PK67LWNC / shades Ø 80 cm white / nickel structure and base / black cable	€ 1.900,00										

H 220 cm / H rod 100 cm / weight 5 kg

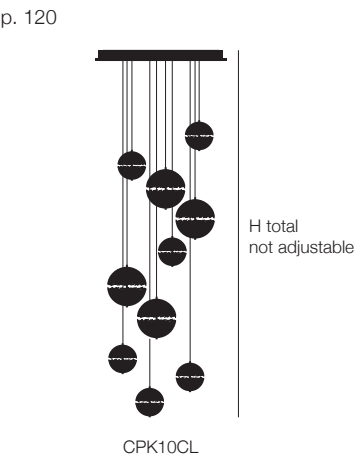


PostKrisi Chandelier / pendant lamp

CPK3QL / satin base 30x30 cm / 3x PK14 / H 180 cm	€	960,00	110V or 240V	extra-low-voltage 12V DC LED	G4 bulb	3x1,5W 4,5W	450	2700	85	A+	low voltage driver	YES Triac*	
CPK5QL / satin base 30x30 cm / 5x PK14 / H 180 cm	€	1.600,00				5x1,5W 7,5W	750						
CPK7CL / satin base Ø 40 cm / 7x PK14 / H 180 cm	€	2.240,00				7x1,5W 10,5W	1050						
CPK7QL / satin base 60x60 cm / 7x PK14 / H 180 cm	€	2.240,00											
CPK7RL / satin base 90x30 cm / 3x PK20 and 4x PK14 / H 180 cm	€	2.390,00				10x1,5W 15W	1500						
CPK10CL / satin base Ø 78 cm / 4x PK20 and 6x PK14 / H 300 cm	€	3.400,00											

PK14 = PostKrisi sphere Ø 14 cm natural with jack

PK20 = PostKrisi sphere Ø 20 cm natural with jack

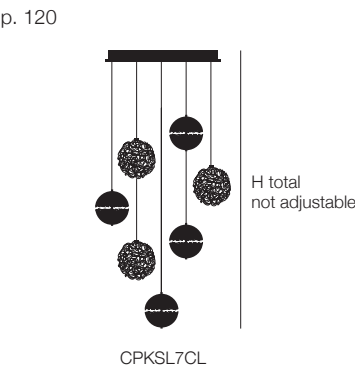

PostKrisi/Sweet Light Chandelier / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
CPKSL7CL / satin base Ø 40 cm / 3x PK14 and 4x SL / H 180 cm	€ 1.920,00	110V or 240V	extra-low-voltage 12V DC LED	G4 bulb	7x1,5W 10,5W	1050	2700	85	A+	low voltage driver	YES Triac*
CPKSL15CL / satin base Ø 78 cm / 6x PK14 and 9x SL / H 300 cm	€ 4.080,00				15x1,5W 22,5W	2250					
CPKSL24RL / satin base 150x30 cm / 9x PK14 and 15x SL / H 400 cm	€ 6.480,00				24x1,5W 36W	3600					
CPKSL35QL / satin base 90x90 cm / 15x PK14 and 20x SL / H 400 cm	€ 9.600,00				35x1,5W 52,5W	5250					
CPKSL50RL / satin base 150x60 cm / 16x PK14 and 34x SL / H 400 cm	€ 13.280,00				50x1,5W 75W	7500					


PK14 = PostKrisi sphere Ø 14 cm natural with jack

SL = Sweet Light Ø 10 cm aluminium with jack

For further models see also Sweet Light Chandelier page 46



p. 121



PostKrisi W 71 / wall or ceiling lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK71STLBU / blue	€	1.535,00		240V (110V available on request)	constant voltage 24V LED	low voltage LED strip	60W	8000	3000	>95	A++	constant voltage driver	YES DALI / 1 ... 10V / PUSH
PK71STLR / red	€	1.535,00											
PK71STLW / white	€	1.535,00											
PK71STLY / yellow	€	1.535,00											

H ledge 15 cm


Fil de Fer

[*Finishes*] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[*Cables*] // **(s)** suspension cable. / **(el)** electrical cable.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website).

p. 124



Fil de Fer / pendant lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
F5SL / Ø 50 cm aluminium / steel cable ^(el) / grey braided cable ^(el) / nickel base	€	1.200,00		110V or 240V	extra-low-voltage 12V DC LED	G4 bulb	12x1,5W 18W	1800	2700	85	A+	electronic 12V DC low voltage	YES Triac
F5SLG / Ø 50 cm matt gold anodized / steel cable ^(el) / gold braided cable ^(el) / gold-plated base	€	1.440,00					18x1,5W 27W	2700					
F7SL / Ø 70 cm aluminium / steel cable ^(el) / grey braided cable ^(el) / nickel base	€	1.600,00					24x1,5W 36W	3600					
F7SLG / Ø 70 cm matt gold anodized / steel cable ^(el) / gold braided cable ^(el) / gold-plated base	€	1.960,00											
F10SL / Ø 100 cm aluminium / steel cable ^(el) / grey braided cable ^(el) / nickel base	€	2.195,00											
F10SLG / Ø 100 cm matt gold anodized / steel cable ^(el) / gold braided cable ^(el) / gold-plated base	€	2.725,00											

weight: Ø 50 8 kg / Ø 70 10 kg / Ø 100 16 kg

p. 127



Fil de Fer Nuvola / pendant lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
FNVAL / mod. A / aluminium / steel cables ^(el) / grey braided cable ^(el) / nickel base	€	2.390,00		110V or 240V	extra-low-voltage 12V DC LED	G4 bulb	24x1,5W 36W	3600	2700	85	A+	electronic 12V DC low voltage	YES Triac
FNVEL / mod. E / aluminium / steel cables ^(el) / grey braided cable ^(el) / nickel base	€	3.700,00					36x1,5W 54W	5400					
FNVFL / mod. F / aluminium / steel cables ^(el) / grey braided cable ^(el) / nickel base	€	4.720,00					44x1,5W 66W	6600					

Further dimensions and gold finish available on request.

Packaging included in the price for models A and E.


mod. A / 120x50x H 35 cm / base Ø 21x10,5 cm
mod. E / 200x80x H 50 cm / base Ø 25x12,5 cm
mod. F / 240x140x H 50 cm / base Ø 25x12,5 cm
cables 170 cm to be cut to size



IVA / VAT excl.



p. 130




Fil de Fer Ovale / pendant lamp

Fil de Fer Ovale / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
F7SVL / Ø 70 cm aluminium / steel cables ^(s) / grey braided cable ^(e) / nickel base	€	1.600,00	110V or 240V	extra-low-voltage 12V DC LED	G4 bulb	20x1,5W 30W	3000	2700	85	A+	electronic 12V DC low voltage	YES Triac
F7SVLG / Ø 70 cm matt gold anodized / steel cables ^(s) / gold braided cable ^(e) / gold-plated base	€	1.960,00										
F11SVL / Ø 110 cm aluminium / steel cables ^(s) / grey braided cable ^(e) / nickel base	€	2.195,00										
F11SVLG / Ø 110 cm matt gold anodized / steel cables ^(s) / gold braided cable ^(e) / gold-plated base	€	2.725,00										

weight: Ø 70 8 kg / Ø 110 17 kg

p. 131




Fil de Fer CW Ovale / ceiling or wall lamp

Fil de Fer CW Ovale / ceiling or wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
F4PVL / Ø 45x25 cm aluminium / nickel base	€	1.070,00	220-240V	extra-low-voltage 12V DC LED	G4 bulb	8x1,5W 12W	1200	2700	85	A+	electronic 12V DC low voltage	YES Triac
F4PVLG / Ø 45x25 cm matt gold anodized / gold-plated base	€	1.220,00										
F7PVL / Ø 70x30 cm aluminium / nickel base	€	1.285,00				10x1,5W 15W	1500					
F7PVLG / Ø 70x30 cm matt gold anodized / gold-plated base	€	1.595,00										

H ledge Ø 45: 25 cm / Ø 70: 30 cm

p. 133




Fil de Fer F / floor lamp

Fil de Fer F / floor lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer	
F3L / Ø 30 cm aluminium / grey braided cable / nickel dimmer	€	915,00	110V or 240V	extra-low-voltage 12V DC LED	G4 bulb	8x1,5W 12W	1200	2700	85	A+	low voltage plug driver	included (memory last step)
F3LG / Ø 30 cm gold / gold braided cable / nickel dimmer	€	1.025,00										
F5L / Ø 50 cm aluminium / grey braided cable / nickel dimmer	€	1.200,00				10x1,5W 15W	1500					
F5LG / Ø 50 cm gold / gold braided cable / nickel dimmer	€	1.440,00										
F7L / Ø 70 cm aluminium / grey braided cable / nickel dimmer	€	1.600,00				15x1,5W 22,5W	2250					
F7LG / Ø 70 cm gold / gold braided cable / nickel dimmer	€	1.960,00										
F10L / Ø 100 cm aluminium / grey braided cable / nickel dimmer	€	2.195,00				20x1,5W 30W	3000					
F10LG / Ø 100 cm gold / gold braided cable / nickel dimmer	€	2.725,00										

12V cable: 170 cm / plug cable: 100 cm

p. 135



Sweet Light Chandelier / pendant lamp


Sweet Light Chandelier / pendant lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
CSL3QL / 3x Sweet Light Ø 10 cm / satin base 30x30 cm / H 180 cm	€ 720,00	110V or 240V	extra-low-voltage 12V DC LED	G4 bulb	3x1,5W 4,5W	450	2700	85	A+	electronic 12V DC low voltage	YES Triac
CSL5QL / 5x Sweet Light Ø 10 cm / satin base 30x30 cm / H 180 cm	€ 1.200,00				5x1,5W 7,5W	750					
CSL7CL / 7x Sweet Light Ø 10 cm / satin base Ø 40 cm / H 180 cm	€ 1.680,00				7x1,5W 10,5W	1050					
CSL7QL / 7x Sweet Light Ø 10 cm / satin base 60x60 cm / H 180 cm	€ 1.680,00				10x1,5W 15W	1500					
CSL10CL / 10x Sweet Light Ø 10 cm / satin base Ø 78 cm / H 180 cm	€ 2.400,00				15x1,5W 22,5W	2250					
CSL15QL / 15x Sweet Light Ø 10 cm / satin base 60x60 cm / H 300 cm	€ 3.600,00				20x1,5W 30W	3000					
CSL20CL / 20x Sweet Light Ø 10 cm / satin base Ø 78 cm / H 300 cm	€ 4.800,00				35x1,5W 52,2W	5250					
CSL35CL / 35x Sweet Light Ø 10 cm / satin base Ø 78 cm / H 400 cm	€ 8.400,00										

Standard version with aluminium Sweet Light spheres.

For further models see also PostKrisi Chandelier page 42.



p. 136




Sweet Light T / table lamp

			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
SLL / Ø 10 cm aluminium / blue wire	€	225,00	110V-240V	extra low voltage 12V DC LED	G4 bulb	1x1,5W	150	2700	85	A+	low voltage plug driver	included touch (on the sphere)
SLLBR / Ø 10 cm brass / blue wire	€	230,00										
SLLS / Ø 10 cm silver / blue wire	€	270,00										

cable: 250 cm

p. 137



Uomo della Luce S / table lamp


			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
USL / rough iron structure / sphere Ø 10 cm aluminium / nickel/black dimmer / black wires	€	575,00	110V-240V	extra low voltage 12V DC LED	G4 bulb	1x1,5W	150	2700	85	A+	low voltage plug driver	included (memory last step)

Lucenera

[*Finishes*] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Carbon and fiberglass tubes.** The production of the tubes is partially craftmade. Any imperfection in the texture is a peculiarity of the product and sign of craftsmanship. The quality of the tubes is guaranteed by using LED bulbs only, preferably with the max wattage included in our standard products.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / **(*)** LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer.

p. 140



Lucenera 200 / table lamp


			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
L200L / black tube/base/flexible pipe / nickel stand and details	€	455,00	240V (110V available with on/off - bulb not supplied)	mains voltage LED	GU10 bulb	1x5,5W	375	3000	90	A+	-	included (memory 0%)
L200LW / white tube/base/flexible pipe / nickel stand and details	€	455,00										



IVA / VAT excl.




p. 141




Lucenera 500 / table lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer	
L500L / black tube/base/stand / nickel details				€	465,00	240V (110V available with on/off - bulb not supplied)	mains voltage LED	1x5,5W	375	3000	90	A+	-	included (memory 0%)
L500LW / white tube/base/stand / nickel details				€	465,00									

p. 143



Lucenera 504 / pendant lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming	
L504L / black tube and base / metal braided cable / nickel details				€	375,00	110V (bulb not supplied)-240V	mains voltage LED	1x5,5W	375	3000	90	A+	-	YES IGBT/Triac*
L504LW / white tube and base / metal braided cable / nickel details				€	375,00									


p. 144-145



Lucenera 502 / 503 / wall lamp					voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming		
L502L / Lucenera 502 / black tube/base/rod / nickel details					€	350,00	110V (bulb not supplied)-240V	mains voltage LED	GU10 bulb	1x5,5W	375	3000	90	A+	-	NO on/off switch included
L502LW / Lucenera 502 / white tube/base/rod / nickel details					€	350,00										
L503L / Lucenera 503 / black tubes/base/rods / nickel details					€	580,00	110V (bulbs not supplied)-240V	mains voltage LED	GU10 bulb	2x5,5W 11W	750	3000	90	A+	-	NO on/off switch included
L503LW / Lucenera 503 / white tubes/base/rods / nickel details					€	580,00										

base 10x10x3,5 cm / H ledge 35/50 cm variable


p. 147



Lucenera 506 / standing lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer	
L506L / black tube/base/stand / nickel details				€ 520,00	110V (bulb not supplied)-240V	mains voltage LED	GU10 bulb	1x5,5W	375	3000	90	A+	-	included (memory last step)
L506LW / white tube/base/stand / nickel details				€ 520,00										




p. 148

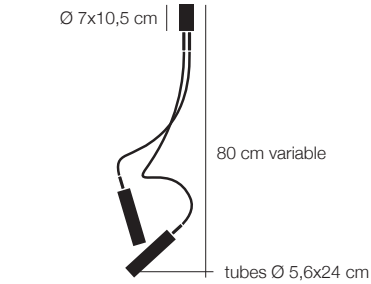


Lucenera 206 / ceiling lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
L20680L / black tubes/base/flexible pipes / nickel details				110V (bulbs not supplied)-240V	mains voltage LED	GU10 bulb	2x5,5W 11W	750	3000	90	A+	-	YES IGBT/Triac*
L20680LW / white tubes/base/flexible pipes / nickel details													

p. 149




Lucenera 202 / wall lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming	
L202L / black tube/base/flexible pipe / nickel details				€ 330,00	110V (bulb not supplied)-240V	mains voltage LED	GU10 bulb	1x5,5W	375	3000	90	A+	-	YES IGBT/Triac*
L202LW / white tube/base/flexible pipe / nickel details				€ 330,00										

p. 150

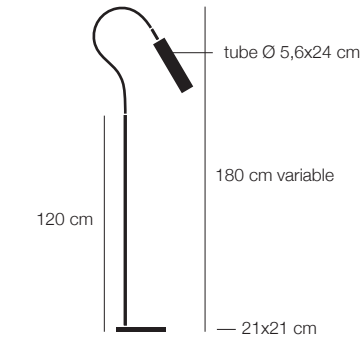

Lucenera 207 / standing lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer	
L207L / black tube/base/flexible pipe / nickel stand and details				€ 540,00	110V (bulb not supplied)-240V	mains voltage LED	GU10 bulb	1x5,5W	375	3000	90	A+	-	included (memory last step)
L207LW / white tube/base/flexible pipe / nickel stand and details				€ 540,00										

p. 151

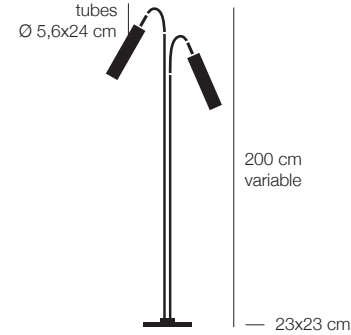

Lucenera 208 / standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer	
L208L / black tubes/base/flexible pipes / nickel stands and details			€ 930,00	110V (bulbs not supplied)-240V	mains voltage LED	GU10 bulb	2x5,5W 11W	750	3000	90	A+	-	included (memory last step)
L208LW / white tubes/base/flexible pipes / nickel stands and details			€ 930,00										




Stchu-Moon

[*Finishes*] // **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering. / **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request.

[*Cables*] // **(s)** suspension cable. / **(el)** electrical cable.


[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / **(*)** LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / **(**)** The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.



Stchu-Moon 02 230V / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SM24230LS / Ø 40 cm silver (exterior black) / black cable / nickel base	€	500,00	110V (bulb not supplied)-240V	mains voltage LED	E27 bulb	1x8W	900	2700	≥80	A++	-	YES IGBT/Triac*
SM24230LG / Ø 40 cm gold (exterior black) / black cable / nickel base	€	500,00										
SM24230LC / Ø 40 cm copper (exterior black) / black cable / nickel base	€	500,00										
SM26230LS / Ø 60 cm silver (exterior black) / black cable / nickel base	€	740,00										
SM26230LG / Ø 60 cm gold (exterior black) / black cable / nickel base	€	740,00										
SM26230LC / Ø 60 cm copper (exterior black) / black cable / nickel base	€	740,00										

Available on request with LED silver crowned bulb (code LLC31)

weight: Ø 40 cm 1,8 kg / Ø 60 cm 2,8 kg




Stchu-Moon 02 230V / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SM28230LS / Ø 80 cm silver (exterior black) / black cables / nickel base	€	1.175,00	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	≥80	A++	-	YES IGBT/Triac*
SM28230LG / Ø 80 cm gold (exterior black) / black cables / nickel base	€	1.175,00										
SM28230LC / Ø 80 cm copper (exterior black) / black cables / nickel base	€	1.175,00										
SM210230LS / Ø 100 cm silver (exterior black) / black cables / nickel base	€	1.535,00										
SM210230LG / Ø 100 cm gold (exterior black) / black cables / nickel base	€	1.535,00										
SM210230LC / Ø 100 cm copper (exterior black) / black cables / nickel base	€	1.535,00										

Available on request with LED silver crowned bulbs (code LLC31)

weight: Ø 80 cm 6,5 kg / Ø 100 cm 7,5 kg

p. 155




Stchu-Moon 02 / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SM24LS / Ø 40 cm silver (exterior black) / steel spoons / black cable and base	€	865,00	240V (110V available on request)	24V DC LED board	LED board	2x5W 10W	1000	2600-2800 perceived range	80	A	electronic 24V DC low voltage	YES Triac
SM24LG / Ø 40 cm gold (exterior black) / steel spoons / black cable and base	€	865,00										
SM24LC / Ø 40 cm copper (exterior black) / steel spoons / black cable and base	€	865,00										
SM26LS / Ø 60 cm silver (exterior black) / steel spoons / black cable and base	€	1.105,00										
SM26LG / Ø 60 cm gold (exterior black) / steel spoons / black cable and base	€	1.105,00										
SM26LC / Ø 60 cm copper (exterior black) / steel spoons / black cable and base	€	1.105,00										

weight: Ø 40 cm 2 kg / Ø 60 cm 3,5 kg




p. 155



Stchu-Moon 02 / pendant lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming		
SM28LS / Ø 80 cm silver (exterior black) / steel spoons / steel cable ^(s) / black cable ^(e) and base				€	1.475,00	240V (110V available on request)	24V DC LED board	LED board	4x5W 20W	2000	2600-2800 perceived range	80	A	electronic 24V DC low voltage	YES Triac
SM28LG / Ø 80 cm gold (exterior black) / steel spoons / steel cable ^(s) / black cable ^(e) and base				€	1.475,00										
SM28LC / Ø 80 cm copper (exterior black) / steel spoons / steel cable ^(s) / black cable ^(e) and base				€	1.475,00										
SM210LS / Ø 100 cm silver (exterior black) / steel spoons / steel cable ^(s) / black cable ^(e) and base				€	2.295,00										
SM210LG / Ø 100 cm gold (exterior black) / steel spoons / steel cable ^(s) / black cable ^(e) and base				€	2.295,00										
SM210LC / Ø 100 cm copper (exterior black) / steel spoons / steel cable ^(s) / black cable ^(e) and base				€	2.295,00										

weight: Ø 80 cm 6,5 kg / Ø 100 cm 7,5 kg


p. 156



Stchu-Moon 02 Chandelier / pendant lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming	
SM234LS / Ø 40 cm silver (exterior black) / steel spoons / black cables and structure				€	2.735,00	240V (110V available on request 1..10V or push dimm.)	24V DC LED board	6x5W 30W	3000	2600-2800 perceived range	80	A	electronic 24V DC low voltage	YES Triac
SM234LG / Ø 40 cm gold (exterior black) / steel spoons / black cables and structure				€	2.735,00									
SM234LC / Ø 40 cm copper (exterior black) / steel spoons / black cables and structure				€	2.735,00									
SM236LS / Ø 60 cm silver (exterior black) / steel spoons / black cables and structure				€	3.455,00									
SM236LG / Ø 60 cm gold (exterior black) / steel spoons / black cables and structure				€	3.455,00									
SM236LC / Ø 60 cm copper (exterior black) / steel spoons / black cables and structure				€	3.455,00									

3x Ø 40 cm
H max 190 cm / tot. Ø 105 cm / weight 13,5 cm
3x Ø 60 cm
H max 200 cm / tot. Ø 145 cm / weight 18,5 cm

p. 159



Stchu-Moon 05 / wall lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming		
SM5LS / silver (exterior white) / steel spoon / white base				€	505,00	240V (110V available on request 1..10V or push dimm.)	24V DC LED board	LED board	1x5W	500	2600-2800 perceived range	80	A	electronic 24V DC low voltage	YES Triac
SM5LG / gold (exterior white) / steel spoon / white base				€	505,00										
SM5LC / copper (exterior white) / steel spoon / white base				€	505,00										

p. 160




Stchu-Moon 06 / wall lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming	
SM6LS / silver (exterior black) / nickel flex and bulb cover / aluminium base				€ 420,00	110V (bulb not supplied)-240V	mains voltage LED	E14 bulb	1x10W	800	2700	≥80	A+	-	YES IGBT/Triac*
SM6LG / gold (exterior black) / brass flex / nickel bulb cover / aluminium base				€ 420,00										
SM6LC / copper (exterior black) / brass flex / nickel bulb cover / aluminium base				€ 420,00										



IVA / VAT excl.




p. 161



Stchu-Moon R / recessed lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SMI14S / Ø 14 cm silver (bulb not included)	€	165,00		-	mains voltage	GU10 bulb not included	-	-	-	-	-	-	-
SMI14G / Ø 14 cm gold (bulb not included)	€	165,00											
SMI14C / Ø 14 cm copper (bulb not included)	€	165,00											
LS4 / LED bulb	net price	€	15,00	220-240V	mains voltage LED	GU10 bulb	5,5W	375	3000	90	A+	-	YES IGBT/Triac*

installation hole Ø 13 cm / max depth 15 cm

p. 164




Stchu-Moon 08 / wall/standing lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
SM88LS / Ø 80 cm silver (exterior grey matt) / nickel light structure / black anvil	€	1.250,00		240V (110V available on request)	low voltage LED 12V	GU5.3 bulb	1x7W	630	3000	80	A+	-	included (memory 100%)
SM88LG / Ø 80 cm gold (exterior grey matt) / nickel light structure / black anvil	€	1.250,00											
SM88LC / Ø 80 cm copper (exterior grey matt) / nickel light structure / black anvil	€	1.250,00											
SM812LS / Ø 120 cm silver (exterior grey matt) / nickel light structure / black anvil	€	1.520,00											
SM812LG / Ø 120 cm gold (exterior grey matt) / nickel light structure / black anvil	€	1.520,00											
SM812LC / Ø 120 cm copper (exterior grey matt) / nickel light structure / black anvil	€	1.520,00											

p. 165



Stchu-Moon 09 / standing lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
SM9LS / silver (rough iron ext.) / steel spoons / metal braided cable / black dimmer/cable	€	2.465,00		110-240V	24V DC LED board (1x candle included)	LED board	2x5W 10W	1000	2600-2800 perceived range	80	A	low voltage plug driver**	included (memory last step)
SM9LG / gold (rough iron ext.) / steel spoons / metal braided cable / black dimmer/cable	€	2.465,00											
SM9LC / copper (rough iron ext.) / steel spoons / metal braided cable / black dimmer/cable	€	2.465,00											

p. 166




Stchu-Moon 01 / floor lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
SM14LS / Ø 40 cm silver (ext. black) / steel spoon / metal braided cable / black dimmer/cable	€	835,00	110-240V	24V DC LED board	LED board	1x5W	500	2600-2800 perceived range	80	A	low voltage plug driver**	included (memory last tep)
SM14LG / Ø 40 cm gold (ext. black) / steel spoon / metal braided cable / black dimmer/cable	€	835,00										
SM14LC / Ø 40 cm copper (ext. black) / steel spoon / metal braided cable / black dimmer/cable	€	835,00										
SM16LS / Ø 60 cm silver (ext. black) / steel spoons / metal braided cable / black dimmer/cable	€	1.075,00				2x5W 10W	1000					
SM16LG / Ø 60 cm gold (ext. black) / steel spoons / metal braided cable / black dimmer/cable	€	1.075,00										
SM16LC / Ø 60 cm copper (ext. black) / steel spoons / metal braided cable / black dimmer/cable	€	1.075,00										



Macchina della Luce

[*Finishes*] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / **(*)** LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer.

	Macchina della Luce mod. A / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming		
	MALG / discs Ø 80-50-30-18 cm / gold / nickel base / brass rods			€	1.935,00	220-240V	24V DC LED board	LED board	7x6W 42W	4410	2600-2800 perceived range	80	A+	electronic 24V DC low voltage	YES Triac
	MALS / discs Ø 80-50-30-18 cm / silver / nickel base / aluminium rods			€	1.935,00										
	MALC / discs Ø 80-50-30-18 cm / copper / nickel base / brass rods			€	1.935,00										
	MALG110V / discs Ø 80-50-30-18 cm / gold / nickel base / brass rods			€	1.935,00	110V	24V DC LED board	LED board	7x6W 42W	4410	2600-2800 perceived range	80	A+	electronic 24V DC low voltage	YES Triac
	MALS110V / discs Ø 80-50-30-18 cm / silver / nickel base / aluminium rods			€	1.935,00										
	MALC110V / discs Ø 80-50-30-18 cm / copper / nickel base / brass rods			€	1.935,00										
weight 10 kg / rods 300 cm available on request															

rods
145 cm
to be cut
to size

Ø 21x10,5 cm


<



IVA / VAT excl.




p. 171

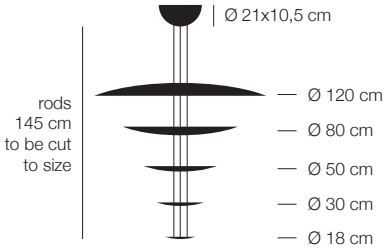


Macchina della Luce mod. D / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MDLG / discs Ø 120 (flying leaf)-80-50-30-18 cm / gold / nickel base / brass rods			220-240V	24V DC LED board	LED board	10x6W 60W	6300	2600-2800 perceived range	80	A+	electronic 24V DC low voltage	YES Triac
MDLS / discs Ø 120 (flying leaf)-80-50-30-18 cm / silver / nickel base / aluminium rods												
MDLC / discs Ø 120 (flying leaf)-80-50-30-18 cm / copper / nickel base / brass rods												
MDLG110V / discs Ø 120 (flying leaf)-80-50-30-18 cm / gold / nickel base / brass rods			110V	24V DC LED board	LED board	8x6W 48W	5040	2600-2800 perceived range	80	A+	electronic 24V DC low voltage	YES Triac
MDLS110V / discs Ø 120 (flying leaf)-80-50-30-18 cm / silver / nickel base / aluminium rods												
MDLC110V / discs Ø 120 (flying leaf)-80-50-30-18 cm / copper / nickel base / brass rods												

weight 16 kg / rods 300 cm available on request

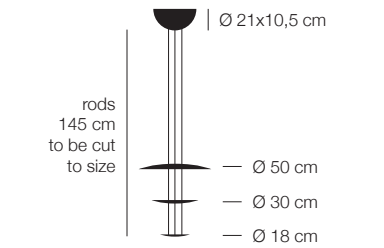

Macchina della Luce mod. E / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MELG / discs Ø 50-30-18 cm / gold / nickel base / brass rods	€	1.165,00	220-240V	24V DC LED board	LED board	4x6W 24W	2520	2600-2800 perceived range	80	A+	electronic 24V DC low voltage	YES Triac
MELS / discs Ø 50-30-18 cm / silver / nickel base / aluminium rods	€	1.165,00										
MELC / discs Ø 50-30-18 cm / copper / nickel base / brass rods	€	1.165,00										
MELG110V / discs Ø 50-30-18 cm / gold / nickel base / brass rods	€	1.165,00	110V	24V DC LED board	LED board	4x6W 24W	2520	2600-2800 perceived range	80	A+	electronic 24V DC low voltage	YES Triac
MELS110V / discs Ø 50-30-18 cm / silver / nickel base / aluminium rods	€	1.165,00										
MELC110V / discs Ø 50-30-18 cm / copper / nickel base / brass rods	€	1.165,00										


weight 6 kg / rods 300 cm available on request

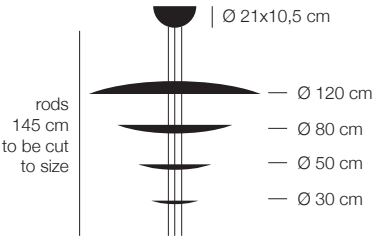

Macchina della Luce mod. F / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MFLG / discs Ø 120 (flying leaf)-80-50-30 cm / gold / nickel base / brass rods	€	2.940,00	220-240V	24V DC LED board	LED board	9x6W 54W	5670	2600-2800 perceived range	80	A+	electronic 24V DC low voltage	YES Triac
MFLS / discs Ø 120 (flying leaf)-80-50-30 cm / silver / nickel base / aluminium rods	€	2.940,00										
MFLC / discs Ø 120 (flying leaf)-80-50-30 cm / copper / nickel base / brass rods	€	2.940,00										
MFLG110V / discs Ø 120 (flying leaf)-80-50-30 cm / gold / nickel base / brass rods	€	2.940,00	110V	24V DC LED board	LED board	8x6W 48W	5040	2600-2800 perceived range	80	A+	electronic 24V DC low voltage	YES Triac
MFLS110V / discs Ø 120 (flying leaf)-80-50-30 cm / silver / nickel base / aluminium rods	€	2.940,00										
MFLC110V / discs Ø 120 (flying leaf)-80-50-30 cm / copper / nickel base / brass rods	€	2.940,00										

weight 15 kg / rods 300 cm available on request

p. 172

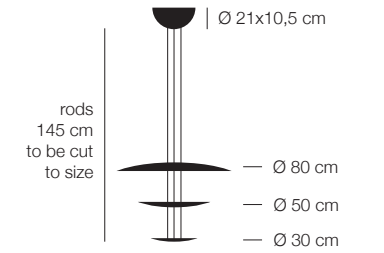


Macchina della Luce mod. I / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MILG / discs Ø 80-50-30 cm / gold / nickel base / brass rods	€	1.620,00	220-240V	24V DC LED board	LED board	5x6W 30W	3150	2600-2800 perceived range	80	A+	electronic 24V DC low voltage	YES Triac
MILS / discs Ø 80-50-30 cm / silver / nickel base / aluminium rods	€	1.620,00										
MILC / discs Ø 80-50-30 cm / copper / nickel base / brass rods	€	1.620,00										
MILG110V / discs Ø 80-50-30 cm / gold / nickel base / brass rods	€	1.620,00	110V	24V DC LED board	LED board	5x6W 30W	3150	2600-2800 perceived range	80	A+	electronic 24V DC low voltage	YES Triac
MILS110V / discs Ø 80-50-30 cm / silver / nickel base / aluminium rods	€	1.620,00										
MILC110V / discs Ø 80-50-30 cm / copper / nickel base / brass rods	€	1.620,00										


weight 8 kg / rods 300 cm available on request



p. 175



Macchina della Luce W mod. I / wall lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MPILW / discs Ø 80-50-30 cm / white / white base	€ 1.440,00	110V (bulbs not supplied)-240V	mains voltage LED	G9 bulbs	8x3,5W 28W	2080	2700	>80	A+	-	YES IGBT/Triac
MPILG / discs Ø 80-50-30 cm / gold / gold base	€ 1.590,00										
MPILS / discs Ø 80-50-30 cm / silver / silver base	€ 1.590,00										
MPILC / discs Ø 80-50-30 cm / copper / copper base	€ 1.590,00										




Macchina della Luce W mod. C / wall lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MPCLW / discs Ø 120-80-50 cm / white / white base	€ 1.970,00	110V (bulbs not supplied)-240V	mains voltage LED	G9 bulbs	8x3,5W 28W	2080	2200	>80	A+	-	YES IGBT/Triac*
MPCLG / discs Ø 120-80-50 cm / gold / gold base	€ 2.200,00										
MPCLS / discs Ø 120-80-50 cm / silver / silver base	€ 2.200,00										
MPCLC / discs Ø 120-80-50 cm / copper / copper base	€ 2.200,00										

Luci d’Oro

[*Finishes*] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*****) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / (******) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.


p. 179



Malagola 27 / pendant lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
ML27LG / gold / black base and cable	€ 495,00	110V-240V	constant current LED	COB LED	1x2W	300	2700	≥80	A++	constant current driver	NO
ML27LS / silver / black base and cable	€ 495,00										
ML27LC / copper / black base and cable	€ 495,00										



p. 179




Malagola 55 / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
ML55LG / gold / black-cloth cable / black base	€ 665,00	110V (bulb not supplied)-240V	mains voltage LED	E27 bulb	1x8W	900	2700	≥80	A++	-	YES IGBT/Triac*
ML55LS / silver / black-cloth cable / black base	€ 665,00										
ML55LC / copper / black-cloth cable / black base	€ 665,00										

weight 1,7 kg


p. 179



Malagola 110 / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
ML110LG / gold / black-cloth cable / black base	€ 1.590,00	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	≥80	A++	-	YES IGBT/Triac*
ML110LS / silver / black-cloth cable / black base	€ 1.590,00										
ML110LC / copper / black-cloth cable / black base	€ 1.590,00										

weight 4,5 kg

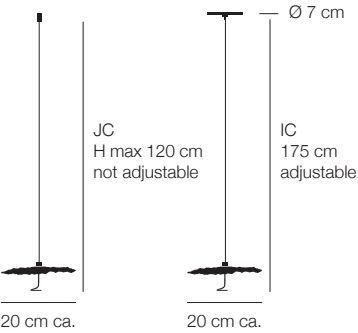


Gold Moon JC / IC / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
GMJC / mod. JC / nickel jack connection / black wire / black/gold wrap shade / copper curl	€ 225,00	-	constant current LED 350 mA	LED Jack/interch.	1x1W	100	2700	80	A+	not included available on request	-
GMIC / mod. IC / nickel plate with tensioner / black wire / black/gold wrap shade / copper curl	€ 215,00			interch. LED							

Available in a minimum amount of 20 pieces (not available as single pendant)

installation hole mod. JC Ø 1,3 cm
installation hole mod. IC Ø 5,5 cm

p. 180

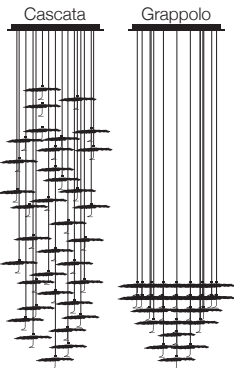

Gold Moon Chandelier / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
CGM20CL / satin steel base / 20x black/gold wrap shades / copper curls / nickel jack / black wires	€ 5.200,00	110V or 240V	constant current LED 350 mA	interch. LED	20x1W 20W	2000	2700	80	A+	constant current driver	YES IGBT/Triac
CGM25CL / satin steel base / 25x black/gold wrap shades / copper curls / nickel jack / black wires	€ 6.500,00				25x1W 25W	2500					
CGM35CL / satin steel base / 35x black/gold wrap shades / copper curls / nickel jack / black wires	€ 9.100,00				35x1W 35W	3500					

Available with different base dimensions and pendants amount (minimum 20)


base Ø 78 cm / shades Ø 20 cm ca. /
H max 300 cm not adjustable



IVA / VAT excl.




p. 185



DiscO / ceiling lamp

				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
DSOLG / gold / polished aluminium and nickel details	€	720,00		240V (available 110V DALI dimmable)	constant current LED	COB LED	1x15W	2200	2700	80	A++	constant current LED driver	YES Triac
DSOLS / silver / polished aluminium and nickel details	€	720,00											
DSOLC / copper / polished aluminium and nickel details	€	720,00											
DSOLW / white / polished aluminium and nickel details	€	690,00											

p. 186



Telchisugiò / wall lamp

				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
TCSLG / gold / brass flex / aluminium base	€	515,00		220-240V (110V available on request)	low voltage LED	GU4 bulb	1x3,5W	140	2700	80	A	low voltage driver	NO
TCSLS / silver / nickel flex / aluminium base	€	515,00											
TCSLC / copper / brass flex / aluminium base	€	515,00											

flex Ø 0,6x40 cm


p. 187



Luna W / wall lamp

				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LNW30G / gold / copper stick / brass flex	€	380,00		110V or 240V	constant current LED 350 mA	interch. LED	2x1W 2W	200	2700	80	A+	constant current driver	NO
LNW30S / silver / copper stick / brass flex	€	380,00											
LNW30C / copper / copper stick / brass flex	€	380,00											

p. 189



Luna Piena 80 / 120 / ceiling or wall lamp

				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LP80LG / Luna Piena 80 / gold flying leaf (exterior grey matt) / brass flex / white base	€	915,00		220-240V (110V available on request)	low voltage LED 12V	GU5.3	1x7W	630	3000	80	A+	low voltage driver	YES IGBT/Triac
LP80LS / Luna Piena 80 / silver flying leaf (exterior grey matt) / nickel flex / white base	€	915,00											
LP80LC / Luna Piena 80 / copper flying leaf (exterior grey matt) / brass flex / white base	€	915,00											
LP120LG / Luna Piena 120 / gold flying leaf (exterior grey matt) / brass flex / white base	€	1.305,00											
LP120LS / Luna Piena 120 / silver flying leaf (exterior grey matt) / nickel flex / white base	€	1.305,00											
LP120LC / Luna Piena 120 / copper flying leaf (exterior grey matt) / brass flex / white base	€	1.305,00											

Ø 80: flex Ø 1,3x50 cm
Ø 120: flex Ø 1,5x80 cm



p. 190



Ø 50/80/120 cm

Full Moon 50 / 80 / 120 / wall lamp

FM50W / Full Moon 50 / white / nickel sticks / white base	€	745,00	240V (110V available not dimmable)	constant current LED 350 mA	interch. LED	5x1W 5W	500	2700	80	A+	constant current driver	YES IGBT/Triac**
FM50G / Full Moon 50 / gold / nickel sticks / white base	€	800,00										
FM50S / Full Moon 50 / silver / nickel sticks / white base	€	800,00										
FM80W / Full Moon 80 / white / nickel sticks / white base	€	1.150,00	240V (110V available 1 ... 10V or push dimmable)			10x1W 10W	1000					
FM80G / Full Moon 80 / gold / nickel sticks / white base	€	1.235,00										
FM80S / Full Moon 80 / silver / nickel sticks / white base	€	1.235,00										
FM120W / Full Moon 120 / white / nickel sticks / white base	€	1.410,00										
FM120G / Full Moon 120 / gold / nickel sticks / white base	€	1.625,00										
FM120S / Full Moon 120 / silver / nickel sticks / white base	€	1.625,00										

base Ø 14x3 cm / H ledge 15 cm

p. 191




Ø 80/120 cm

12 cm ca.

Francesca 80 / 120 / wall lamp

			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
FR8LWG / Francesca 80 / white/gold back side / white base	€	815,00	110V (bulbs not supplied)-240V	mains voltage LED	G9 bulb	4x3,5W 14W	1040	2700	>80	A+	-	YES IGBT/Triac*
FR8LG / Francesca 80 / gold / gold base	€	815,00										
FR8LS / Francesca 80 / silver / silver base	€	815,00										
FR8LC / Francesca 80 / copper / copper base	€	815,00										
FR12LWG / Francesca 120 / white/gold back side / white base	€	1.205,00										
FR12LG / Francesca 120 / gold / gold base	€	1.205,00										
FR12LS / Francesca 120 / silver / silver base	€	1.205,00										
FR12LC / Francesca 120 / copper / copper base	€	1.205,00										

p. 192



Ø 30 cm


85 cm

21x21 cm

Luce d'Oro T / table lamp

			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LOLG / gold / brass flex / rough iron base / black switch and cable	€	495,00	110V or 240V	low voltage LED 12V	GU4 bulb	1x3,5W	140	2700	80	A	-	NO on/off switch included
LOLS / silver / nickel flex / rough iron base / black switch and cable	€	495,00										
LOLC / copper / brass flex / rough iron base / black switch and cable	€	495,00										

p. 193



Ø 50 cm

150 cm

210/230 cm
variable


30x30 cm

Luce d'Oro F / standing lamp

			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LOFLG / gold / brass flex / rough iron base and structure / black cable and dimmer	€	805,00	240V (110V available on request)	low voltage LED 12V	GU5.3 bulb	1x7W	630	3000	80	A+	-	included (memory 100%)
LOFLS / silver / nickel flex / rough iron base and structure / black cable and dimmer	€	805,00										
LOFLC / copper / brass flex / rough iron base and structure / black cable and dimmer	€	805,00										




p. 194




Luna / table candle holder				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LNG / gold / rough iron base	€	140,00		-	candle (included)	-	-	-	-	-	-	-	-
LNS / silver / rough iron base	€	140,00											
LNC / copper / rough iron base	€	140,00											

p. 195




Gemma / table candle holder				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
GMG / gold / rough iron structure	€	260,00		-	candle (included)	-	-	-	-	-	-	-	-
GMS / disc silver / rough iron structure	€	260,00											
GMC / copper / rough iron structure	€	260,00											

p. 196



Colonna / standing lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
CNLG / gold interior (flying leaf) / rough iron coloumn / black dimmer	€	2.295,00		110V (bulb not supplied)-240V	mains voltage LED	E27 bulb	1x17W	1900	2700	80	A+	-	included (memory last step)
CNLS / silver interior (flying leaf) / rough iron coloumn / black dimmer	€	2.295,00											
CNLC / copper interior (flying leaf) / rough iron coloumn / black dimmer	€	2.295,00											

p. 197



Pepita 1 / Ø 8 cm / 1 LED
Pepita 2 / Ø 14 cm / 2 LED


Pepita 1 / 2 / recessed lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming					
P1W / Pepita 1 / white shade Ø 8 cm / plasterboard panel 22x20 cm included	€	255,00	-	constant current LED 350 mA	LED Jack	1x1W	100	2700	80	A+	not included available on request	-					
P1G / Pepita 1 / gold shade Ø 8 cm / plasterboard panel 22x20 cm included	€	265,00															
P1S / Pepita 1 / silver shade Ø 8 cm / plasterboard panel 22x20 cm included	€	265,00															
P2W / Pepita 2 / white shade Ø 14 cm / plasterboard panel 30x30 cm included	€	310,00				2x1W 2W	200										
P2G / Pepita 2 / gold shade Ø 14 cm / plasterboard panel 30x30 cm included	€	320,00															
P2S / Pepita 2 / silver shade Ø 14 cm / plasterboard panel 30x30 cm included	€	320,00															



Turciù


[*Finishes*] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / **(*)** LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / **(**)** Halogen version available until exhaustion of bulbs stock.

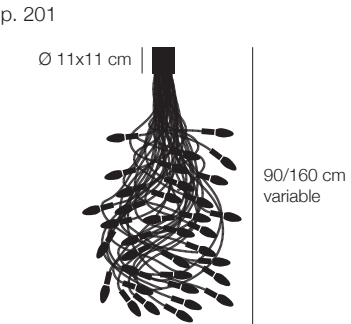


Turciù 36 / ceiling/pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming	
TRS36NC / nickel flex (nickel lampholder) / satin nickel base			€	2.680,00	110V (bulbs not supplied)-240V	mains voltage halogen**	36x20W 720W	8460	2700	100	D	-	YES IGBT/Triac*
TRS36BR / brass flex (nickel lampholder) / satin nickel base			€	2.780,00									
TRS36LNC / nickel flex (nickel lampholder) / satin nickel base			€	3.010,00									
TRS36LBR / brass flex (nickel lampholder) / satin nickel base			€	3.110,00									

flex Ø 0,85 cm:
7x75 cm / 10x100 cm / 9x125 cm / 10x150 cm
weight 20 kg

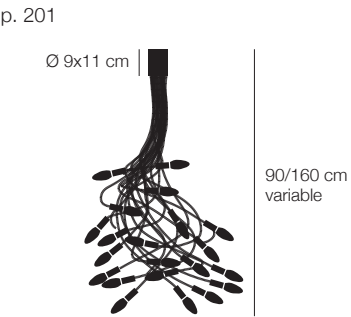

Turciù 21 / ceiling/pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming						
TRS21NC / nickel flex (nickel lampholder) / satin nickel base			€	1.820,00	110V (bulbs not supplied)-240V	mains voltage halogen**	E14 bulb	21x20W 420W	4935	2700	100	D	-	YES IGBT/Triac*				
TRS21BR / brass flex (nickel lampholder) / satin nickel base			€	1.920,00														
TRS21LNC / nickel flex (nickel lampholder) / satin nickel base			€	2.030,00		mains voltage LED									21x4W 84W	7560	≥80	A+
TRS21LBR / brass flex (nickel lampholder) / satin nickel base			€	2.130,00														

flex Ø 0,85 cm: 5x100 cm / 16x150 cm
weight 11 kg

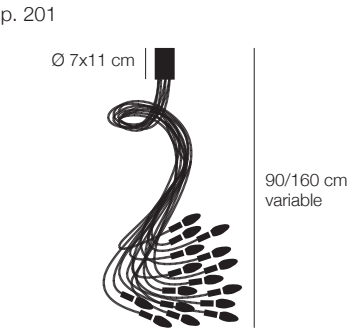


Turciù 16 / ceiling/pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming	
TRS16NC / nickel flex (nickel lampholder) / satin nickel base			€ 1.500,00	110V (bulbs not supplied)-240V	mains voltage halogen**	E14 bulb	16x20W 320W	3760	2700	100	D	-	YES IGBT/Triac*
TRS16BR / brass flex (nickel lampholder) / satin nickel base			€ 1.600,00		mains voltage LED		16x4W 64W	5760		≥80	A+		
TRS16LNC / nickel flex (nickel lampholder) / satin nickel base			€ 1.660,00										
TRS16LBR / brass flex (nickel lampholder) / satin nickel base			€ 1.760,00										

flex Ø 0,85 cm: 16x150 cm
weight 9 kg



IVA / VAT excl.




flex Ø 0,85 cm: 9x150 cm
weight 5 kg

Turciù 9 / ceiling/pendant lamp

Turciù 9 / ceiling/pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming	
TRS9NC / nickel flex (nickel lampholder) / satin nickel base			€ 875,00	110V (bulbs not supplied)-240V	mains voltage halogen**	E14 bulb	9x20W 180W	2115	2700	100	D	-	YES IGBT/Triac*
TRS9BR / brass flex (nickel lampholder) / satin nickel base			€ 935,00				mains voltage LED	9x4W 36W		3240	≥80		
TRS9LNC / nickel flex (nickel lampholder) / satin nickel base			€ 965,00										
TRS9LBR / brass flex (nickel lampholder) / satin nickel base			€ 1.025,00										

p. 202



Turciù 9 / wall lamp

Turciù 9 / wall lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
TR9NC / nickel flex (nickel lampholder) / satin nickel base	€ 695,00	110V (bulbs not supplied)-240V	mains voltage halogen**	E14 bulb	9x20W 180W	2115	2700	100	D	-	YES IGBT/Triac*
TR9BR / brass flex (nickel lampholder) / satin nickel base	€ 755,00		mains voltage LED		9x4W 36W	3240		≥80	A+		
TR9LNC / nickel flex (nickel lampholder) / satin nickel base	€ 785,00										
TR9LBR / brass flex (nickel lampholder) / satin nickel base	€ 845,00										

flex Ø 0,85 cm: 9x75 cm

p. 203




Turciù 5 / wall lamp

Turciù 5 / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
TR5NC / nickel flex (nickel lampholder) / nickel base	€	355,00	110V (bulbs not supplied)-240V	mains voltage halogen**	E14 bulb	5x20W 100W	1175	2700	100	D	-	YES IGBT/Triac*
TR5BR / brass flex (nickel lampholder) / nickel base	€	385,00		mains voltage LED		5x4W 20W	1800		≥80	A+		
TR5LNC / nickel flex (nickel lampholder) / nickel base	€	405,00										
TR5LBR / brass flex (nickel lampholder) / nickel base	€	435,00										

flex Ø 0,85 cm: 5x75 cm

p. 204




Turciù 3 / 2 / wall lamp

Turciù 3 / 2 / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
TR3NC / Turciù 3 / halogen / nickel flex (nickel lampholder) / nickel base	€	245,00	110V (bulbs not supplied)-240V	mains voltage halogen**	E14 bulb	3x20W 60W	705	2700	100	D	-	YES IGBT/Triac*
TR3BR / Turciù 3 / halogen / brass flex (nickel lampholder) / nickel base	€	250,00		mains voltage LED		3x4W 12W	1080		≥80	A+		
TR3LNC / Turciù 3 / LED / nickel flex (nickel lampholder) / nickel base	€	275,00										
TR3LBR / Turciù 3 / LED / brass flex (nickel lampholder) / nickel base	€	280,00										
TR2NC / Turciù 2 / halogen / nickel flex (nickel lampholder) / nickel base	€	190,00	110V (bulbs not supplied)-240V	mains voltage halogen**	E14 bulb	2x20W 40W	470	2700	100	D	-	YES IGBT/Triac*
TR2BR / Turciù 2 / halogen / brass flex (nickel lampholder) / nickel base	€	195,00		mains voltage LED		2x4W 8W	720		≥80	A+		
TR2LNC / Turciù 2 / LED / nickel flex (nickel lampholder) / nickel base	€	210,00										
TR2LBR / Turciù 2 / LED / brass flex (nickel lampholder) / nickel base	€	215,00										

flex Ø 1,3 cm: 3/2x50 cm
on request available with flex Ø 0,85 cm



p. 205




Bonsai / table lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
BNBR / halogen / brass flex (nickel lampholder) / iron base / black cable and dimmer	€ 915,00	240V (110V available on request / bulbs not supplied)	mains voltage halogen	E14 bulb	12x15W 180W	1320	-	-	E	-	included
BNLBR / LED / brass flex (nickel lampholder) / iron base / black cable and dimmer	€ 1.350,00		mains voltage LED		12x2,7W 32,4W	1800	2700	≥80	A+		

flex Ø 0,6 cm: 12x60 cm

p. 206




Sottovento 15 / 16 / standing lamp

Sottovento 15 / 16 / standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
SVLNC / Sottovento 15 / nickel flex (nickel lampholder) / iron structure / black cable and dimmer	€	3.740,00	240V (110V available on request / bulbs not supplied)	mains voltage LED	E14 bulb	15x4W 60W	5400	2700	≥80	A+	-	included
SVLBR / Sottovento 15 / brass flex (nickel lampholder) / iron structure / black cable and dimmer	€	3.840,00										
SVNC / Sottovento 16 / nickel flex (nickel lampholder) / iron structure / black cable and dimmer	€	2.300,00	240V (110V available on request / bulbs not supplied)	mains voltage halogen**	E14 bulb	16x20W 320W	3760	2700	100	D	-	included
SVBR / Sottovento 16 / brass flex (nickel lampholder) / iron structure / black cable and dimmer	€	2.400,00										

Sottovento 16: base 30x30 cm / flex Ø 0,85 16x150 cm
Sottovento 15: base 40x40 cm / flex Ø 1,2 15x150 cm


p. 207



Albero della Luce / standing lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
ALLBR / brass flex (nickel lampholder) / iron structure / black cable	€ 6.330,00	240V (110V available on request / bulbs not supplied)	mains voltage LED	E14 bulb	36x4W 144W	12960	2700	≥80	A+	-	wireless (remote control included)

flex Ø 0,85 cm: 36x150 cm





Oggetti Senza Tempo

[*Finishes*] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Copper** is a very malleable and ductile metal, chosen for its high thermal and electrical conductivity, as well as for its typical reddish-orange colour. We use it untreated, therefore it may oxidise with time, forming a green patina. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.


[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*****) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / (******) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard. / (*******) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

p. 211




EC 301 / wall or ceiling lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
EC301JB / black structure and base / brass joint and lens holder / glass lens	€ 345,00	220-240V	constant current LED 500 mA	COB LED	1x5W 5W	600	2700	80	A++	constant current driver	YES IGBT/Triac***
EC301JW / white structure and base / brass joint and lens holder / glass lens	€ 345,00										



U. F Up / standing lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
UFUB / black rod/base/shade (internally gold) / steel silhouette with magnet	€ 1.050,00	110-240V	constant current LED 500 mA	COB LED	1x17W	2500	2700	80	A++	plug driver **	included (memory last step)
UFUW / white rod/base/shade (internally gold) / steel silhouette with magnet	€ 1.050,00										




U. W / wall lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
UWJB / black base and shade / brass joint	€ 395,00	220-240V (110V available on request)	constant current LED 270 mA	COB LED	1x9W	1324	2700	80	A++	constant current driver	YES IGBT/Triac***
UWJW / white base and shade / brass joint	€ 395,00										



IVA / VAT excl.



U. F Flex / standing lamp


				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
UFFB / black base and shade / brass flex		€	950,00	110-240V	constant current LED 450 mA	COB LED	1x15W	2200	2700	80	A++	plug driver **	included (memory last step)
UFFW / white base and shade / brass flex		€	950,00										



U. W Flex / wall lamp


				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
UWFB / black base and shade / brass flex		€	550,00	220-240V (110V available on request)	constant current LED 450 mA	COB LED	1x15W	2200	2700	80	A++	constant current driver	YES Triac***
UWFW / white base and shade / brass flex		€	550,00										

base:16x3x6 cm



Vi. F / standing lamp

				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
VIFB / black structure and shade / brass details		€	1.550,00	110-240V	constant current LED 450 mA	COB LED	1x15W	2200	2700	80	A++	plug driver **	included (memory last step)
VIFW / white structure and shade / brass details		€	1.550,00										




Vi. W / wall lamp / 240V (110V available on request)

				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
VIWB / black structure and shade / brass details		€	775,00	220-240V (110V available on request)	constant current LED 450 mA	COB LED	1x15W	2200	2700	80	A+	-	YES Triac***
VIWW / white structure and shade / brass details		€	775,00										



IVA / VAT excl.

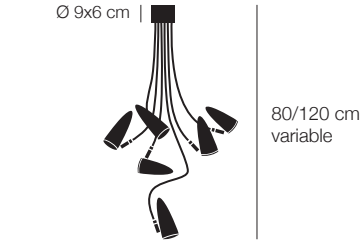

CicloItalia Flex C6 / ceiling lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
CIC6B / black base and spotlights / brass flex and details / glass lens	€ 2.995,00	(110V available on request)	low voltage LED 12V	GU 5.3 bulb	6x7W	3780	3000	80	A+	low voltage LED transformer	YES Triac*
CIC6W / white base and spotlights / brass flex and details / glass lens	€ 2.995,00										


flex: 5x Ø1,3x50 cm; 1x Ø1,2x100 cm



CicloItalia Flex W1 / wall lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
CIW1B / black base and spotlight / brass flex and details / glass lens / with on/off	€ 550,00	(110V available on request)	low voltage LED 12V	GU 5.3 bulb	1x7W	630	3000	80	A+	low voltage LED transformer	NO on/off switch
CIW1W / white base and spotlight / brass flex and details / glass lens / with on/off	€ 550,00										


base: 17x5x4 cm ca.



CicloItalia Flex W2 / wall lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
CIW2B / black base and spotlights / brass flex and details / glass lens	€ 875,00	(110V available on request)	low voltage LED 12V	GU 5.3 bulb	2x7W	1260	3000	80	A+	low voltage LED transformer	YES Triac*
CIW2W / white base and spotlights / brass flex and details / glass lens	€ 875,00										

base: 17x5x4 cm ca.




CicloItalia Flex F3 / standing lamp / 110-240V

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
CIF3BM / black rod/base/spotlights / brass flex and details / glass lens	€ 2.150,00	110-240V	low voltage LED 12V	GU 5.3 bulb	3x7W	1890	3000	80	A+	plug driver **	included (memory last step)
CIF3WM / white rod/base/spotlights / brass flex and details / glass lens	€ 2.150,00										




p. 216



CicloItalia T / table lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
CIBR / brass base and structure / brass/black dimmer / black wire	€ 900,00	220-240V	constant current LED 500 mA	COB LED	1x5W	600	2700	80	A++	plug driver max 18W	included


p. 218



CicloItalia F / standing lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
CIFBR / black base / brass structure / black wire	€ 1.070,00	220-240V	constant current LED 350 mA	COB LED	1x5W	600	2700	80	A+	plug driver (EU plug only)	included touch (memory 0%)
CIFBRM / black base / brass structure / black dimmer and wire	€ 1.070,00	110-240V								plug driver**	included (memory last step)


p. 223



Lola T / table lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LBR / brass structure / copper stick / black wire / brass/black dimmer	€ 580,00	110-240V	constant current LED 350 mA	interch. LED	3x1W 3W	300	2700	80	A+	plug driver**	included (memory last step)

p. 225




Lola F / standing lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LFBR / brass structure / copper stick / black wire	€ 750,00	220-240V	constant current LED 350 mA	interch. LED	3x1W 3W	300	2700	80	A+	plug driver (EU plug only)	included touch (memory 0%)
LFBRM / brass structure / copper stick / black dimmer and wire	€ 750,00	110-240V								plug driver**	included (memory last step)






p. 218



Herem T / USB table lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
HRT / brass flex and shade	€ 390,00	110-240V	constant voltage LED 5V	LED board	1x2,2W	160	3000	70	A+	USB plug driver 5V (EU plug only)	included touch-less

p. 218




Ametista / recessed lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
AMI / nickel / nickel stick	€ 270,00	-	constant current LED 350 mA	interch. LED	1x1W	100	2700	80	A+	not included available on request	-

installation hole Ø 13 cm / max depth 7 cm


p. 229



Luce che dipinge / wall lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LD5L / white canvas / black pipe / black wrap screen	€ 855,00	240V (110V available on request)	extra-low-voltage 12V DC LED bulb	G4	1x1,5W	150	2700	85	A+	low voltage driver	NO

p. 230




Miracolo / table candle holder

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MRBR / brass flex and details	€ 160,00	-	candle (included)	-	-	-	-	-	-	-	-




p. 231



Nike / table lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer	
NKL / white ceramic chalk statue / nickel flex / glass lens / blue wire / nickel/black dimmer				€ 1.045,00	220-240V (EU plug only)	constant current LED 350 mA	interch. LED	1x1W	100	2700	80	A+	constant current plug driver (EU plug only)	included (memory 100%)
NKLPL / white ceramic chalk statue / nickel flex / glass lens / blue wire / nickel/black dimmer				€ 1.045,00	110-240V (all other plugs)	constant current LED 350 mA	interch. LED	1x1W	100	2700	80	A+	constant current plug driver (all other plugs)**	included (memory last step)

p. 232




Shadow / standing lamp with net			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer	
SW / black structure / brass net / black wire and dimmer			€ 850,00	110-240V	constant current LED 350 mA	interch. LED	1x1W	100	2700	80	A+	constant current plug driver**	included (memory last step)



Medousê
(outdoor)

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) Mains voltage LED modules and COB LED are dimmable using IGBT (trailing edge) dimmers designed specifically for LED sources. Their dimming is extremely delicate: incompatible dimmers may cause irreparable damage to the LED. Some dimmers on the market have a NO button (Normally Open) or are specific connector socket-mounted or recessed. They are generally inserted into junction boxes; their limited thickness facilitates the installer's task and makes the dimmer fit for installation even in shallow boxes. Dimmers with an integrated radio dimmer for both manual (NO button) and wireless control are also available. It is important to note that during adjustment the dimming appears less precise, with some flickering. Furthermore some types of dimmer, even if they have been recommended by the manufacturers themselves, have visible flickering (almost essentially down to a minimum) depending on the mains and on the type of interference present. The problem can be solved by increasing the minimum value setting of the potentiometer on the dimmer.

p. 239



Medousê W / wall lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MD3P / green glass / brass rod				110V or 240V	mains voltage LED	LED module IP64	1x17W	1650	2700	80	A+	-	YES*
MD3PTR / transparent glass / brass rod													

p. 240



Medousê F / floor lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MD3 / Ø 30 cm / green glass / aluminium details / plug cable (code MDCV) not included	€	1.150,00	110V or 240V	mains voltage LED	LED module IP64	1x29W	2580	2700	80	A+	-	YES*
MD3TR / Ø 30 cm / transparent glass / brass details / plug cable (code MDCV) not included	€	1.150,00										
MD5 / Ø 50 cm / green glass / aluminium details / plug cable (code MDCV) not included	€	1.870,00										
MD5TR / Ø 50 cm / transparent glass / brass details / plug cable (code MDCV) not included	€	1.870,00										

weight: Ø 30 cm 15 kg / Ø 50 cm 31 kg




More
(outdoor)

[*Finishes*] // **Zinc plated metal** is the material of the stems of the More collection. They are suitable for outdoor installation, but they are not immersion proof. On request we can supply stems suitable for this kind of installation into water.

[*Cables*] // **(s)** suspension cable. / **(el)** electrical cable.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / **(*)** IP specifics: lampholder IP65 (not protected against immersion); wires and connectors IP68; drivers IP67; IP average rate of the lamp 44.

p. 244




More / pendant lamp / driver and accessories not incl. (see pages 106-111)

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MRS / transparent glass / steel cable ^(el) / grey-transparent cable ^(el)	€	310,00	extra-low-voltage 12V DC LED bulb	G4 bulb (IP65 lampholder)*	1x1,5W	150	2700	85	A+	not included available on request	-
MRSA / amber glass / steel cable ^(el) / grey-transparent cable ^(el)	€	340,00									
MRSGR / green glass / steel cable ^(el) / grey-transparent cable ^(el)	€	340,00									

weight 1 kg


p. 247



More 0 / floor lamp / driver and accessories not incl. (see pages 106-111)

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MR0 / transparent glass / grey-transparent cable 300 cm	€	285,00	extra-low-voltage 12V DC LED bulb	G4 bulb (IP65 lampholder)*	1x1,5W	150	2700	85	A+	not included available on request	-
MR0A / amber glass / grey-transparent cable 300 cm	€	315,00									
MR0GR / green glass / grey-transparent cable 300 cm	€	315,00									

p. 248



More F / standing lamp / driver and accessories not incl. (see pages 106-111)

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MR70 / H 70 cm / metal stem / transparent glass / grey-transparent cable 210 cm	€	405,00	extra-low-voltage 12V DC LED bulb	G4 bulb (IP65 lampholder)*	1x1,5W	150	2700	85	A+	not included available on request	-
MR70A / H 70 cm / metal stem / amber glass / grey-transparent cable 210 cm	€	435,00									
MR70GR / H 70 cm / metal stem / green glass / grey-transparent cable 210 cm	€	435,00									
MR100 / H 100 cm / metal stem / transparent glass / grey-transparent cable 170 cm	€	415,00									
MR100A / H 100 cm / metal stem / amber glass / grey-transparent cable 170 cm	€	445,00									
MR100GR / H 100 cm / metal stem / green glass / grey-transparent cable 170 cm	€	445,00									
MR130 / H 130 cm / metal stem / transparent glass / grey-transparent cable 150 cm	€	425,00									
MR130A / H 130 cm / metal stem / amber glass / grey-transparent cable 150 cm	€	455,00									
MR130GR / H 130 cm / metal stem / green glass / grey-transparent cable 150 cm	€	455,00									




Sypha
(outdoor)

[*Finishes*] // **Stems** - the stems of the Sypha collection are made of brass (Syphaduepassi) or black coloured iron (Syphasera and Syphasfera). On request we can supply solutions suitable for immersion into water.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). /
(*) IP specifics: lampholder IP65 (not protected against immersion); wires and connectors IP68; drivers IP67; IP average rate of the lamp 44.


p. 253

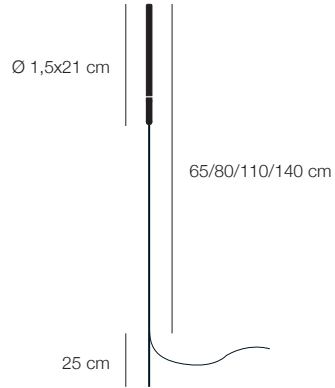

Syphasera / standing lamp / driver and accessories not incl. (see pages 106-111)

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SYS65 / H 65 cm / black stem / brass details / opaline glass / grey-transparent cable 255 cm	€	210,00	extra-low-voltage 12V DC LED bulb	G4 bulb (IP65 lampholder)*	1x1,5W	150	2700	85	A+	not included available on request	-
SYS80 / H 80 cm / black stem / brass details / opaline glass / grey-transparent cable 240 cm	€	215,00									
SYS110 / H 110 cm / black stem / brass details / opaline glass / grey-transparent cable 210 cm	€	225,00									
SYS140 / H 140 cm / black stem / brass details / opaline glass / grey-transparent cable 180 cm	€	235,00									


p. 256

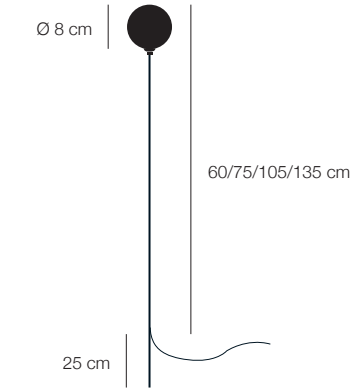

Syphasfera / standing lamp / driver and accessories not incl. (see pages 106-111)

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SYF60 / H 60 cm / black stem / brass details / transparent glass / grey-transparent cable 255 cm	€	225,00	extra-low-voltage 12V DC LED bulb	G4 bulb (IP65 lampholder)*	1x1,5W	150	2700	85	A+	not included available on request	-
SYF60I / H 60 cm / black stem / brass details / irreg. transp. glass / grey-transparent cable 255 cm	€	225,00									
SYF75 / H 75 cm / black stem / brass details / transparent glass / grey-transparent cable 240 cm	€	230,00									
SYF75I / H 75 cm / black stem / brass details / irreg. transp. glass / grey-transparent cable 240 cm	€	230,00									
SYF105 / H 105 cm / black stem / brass details / transparent glass / grey-transparent cable 210 cm	€	240,00									
SYF105I / H 105 cm / black stem / brass details / irreg. transp. glass / grey-transparent cable 210 cm	€	240,00									
SYF135 / H 135 cm / black stem / brass details / transparent glass / grey-transparent cable 180 cm	€	250,00									
SYF135I / H 135 cm / black stem / brass details / irreg. transp. glass / grey-transparent cable 180 cm	€	250,00									

p. 259



Syphaduepassi / standing lamp / driver and accessories not incl. (see pages 106-111)

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SYD45 / H 45 cm / brass stem and details / grey-transparent cable 225 cm	€	195,00	extra-low-voltage 12V DC LED bulb	G4 bulb (IP65 lampholder)*	1x1,5W	150	2700	85	A+	not included available on request	-
SYD75 / H 75 cm / brass stem and details / grey-transparent cable 195 cm	€	205,00									




Fil de Fer
(outdoor)

[*Finishes*] // **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[*Cables*] // **(s)** suspension cable. / **(el)** electrical cable.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / **(*)** The drivers for the dimmable version of our outdoor products are larger than their not-dimmable standards. They are available on request with custom sized bases and boxes (see our website for further references). / **(**)** IP specifics: lampholder IP65 (not protected against immersion); wires and connectors IP68; drivers IP67; IP average rate of the lamp 44.


p. 263



Fil de Fer / outdoor pendant lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
F5SIPL / Ø 50 cm / aluminium / steel cables ^(s) / metal braided cable ^(el) / chrome base	€	1.475,00		110V or 240V	extra-low-voltage 12V DC LED bulb	G4 bulbs (IP65 lampholder)**	8x1,5W 12W	1200	2700	85	A+	electronic 12V DC IP67	NO* (available on request)
F7SIPL / Ø 70 cm / aluminium / steel cables ^(s) / metal braided cable ^(el) / chrome base	€	2.155,00					16x1,5W 24W	2400					
F10SIPL / Ø 100 cm / aluminium / steel cables ^(s) / metal braided cable ^(el) / chrome base	€	3.055,00					20x1,5W 30W	3000					

weight: Ø 50 8,5 kg / Ø 70 13 kg / Ø 100 18 kg


p. 264



Fil de Fer F / outdoor floor lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
F5IPL / Ø 50 cm / aluminium / metal braided cable / black box and plug cable	€	1.280,00		220-240V (110V available on request)	extra-low-voltage 12V DC LED bulb	G4 bulbs (IP65 lampholder)**	8x1,5W 12W	1200	2700	85	A+	electronic 12V DC IP67	NO* (av. on request)
F7IPL / Ø 70 cm / aluminium / metal braided cable / black box and plug cable	€	1.965,00					16x1,5W 24W	2400					
F10IPL / Ø 100 cm / aluminium / metal braided cable / black box and plug cable	€	2.875,00					20x1,5W 30W	3000					

cable 12V 450 cm / cable 230V (EU or CH) 200 cm

p. 269

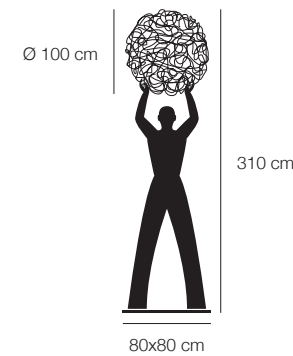

Uomo della Luce XXL / outdoor standing lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
UIPL / rough iron structure / aluminium sphere / black cable, box and plug cable	€	8.045,00		220-240V (110V av. on request)	extra-low-voltage 12V DC LED bulb	G4 bulbs (IP65 lampholder)**	20x1,5W 30W	3000	2700	85	A+	electronic 12V DC IP67	NO* (av. on request)


cable 12V 350 cm / cable 230V (EU or CH) 200 cm

Other Smiths

[*Finishes*] // **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website).

p. 275



Alchemie T / table lamp

AHT / brass disc / alabaster diffuser / Medea limestone base	€	2.545,00	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
			110-240V	constant voltage 24V LED	low voltage LED strip	12W	1300	3000	>95	A++	constant voltage plug driver	NO on/off switch incl.

TECHNICAL INFORMATION






MAINS VOLTAGE LED

The LED modules and COB LED we supply in the Lederam and Medousê collection can be connected directly to the mains voltage because they do not require any driver (other than the one already mounted on the module). Compared to traditional light sources, mains voltage LED modules are more sensitive to any interference in the electricity mains, including voltage fluctuation and harmonic distortion, because they have a faster response to changes in voltage. This means that consequently to this variations occasional flickering or functioning anomaly may occur, but since not depending on the product, they cannot be considered a flaw or defect. Further than by problems on the line voltage, fluctuations and harmonics may be produced by variable power loads, as those caused by many types of motors and electronic devices. In case of anomalies we suggest to check the electrical system to apply protective modules reducing overvoltage at the connection terminals of electronic components. By means of this modules / filters, any residual voltage is then reduced to an appropriate protective level in relation to the discharge current.


Dimming

Mains voltage LED modules and COB LED are dimmable using IGBT (trailing edge) dimmers designed specifically for LED sources. Their dimming is extremely delicate: incompatible dimmers may cause irreparable damage to the LED. Some dimmers on the market have a NO button (Normally Open button) or they are specific connector socket-mounted or recessed. They are generally inserted into junction boxes; their limited thickness facilitates the installer's task and makes the dimmer fit for installation even in shallow boxes. Dimmers with an integrated radio dimmer for both manual (NO button) and wireless control are also available. It is important to note that during adjustment (for instance with a cord dimmer) the dimming appears less precise, with some flickering. Furthermore some types of dimmer, even if they have been recommended by the manufacturers themselves, have visible flickering (almost essentially down to a minimum) depending on the mains and on the type of interference present. The problem can be solved by increasing the minimum value setting of the potentiometer on the dimmer.

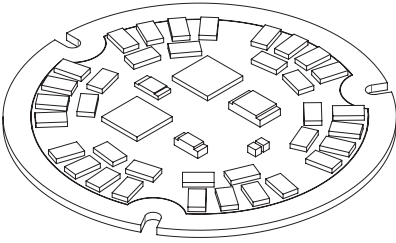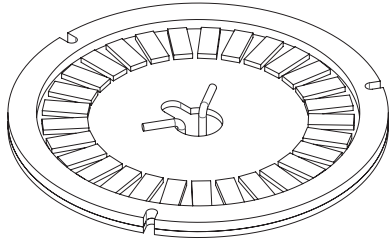
LED module	LED module (Medousê)	COB LED
		
17W 28W	17W 29W	15W 30W




NO (Normally Open) Button

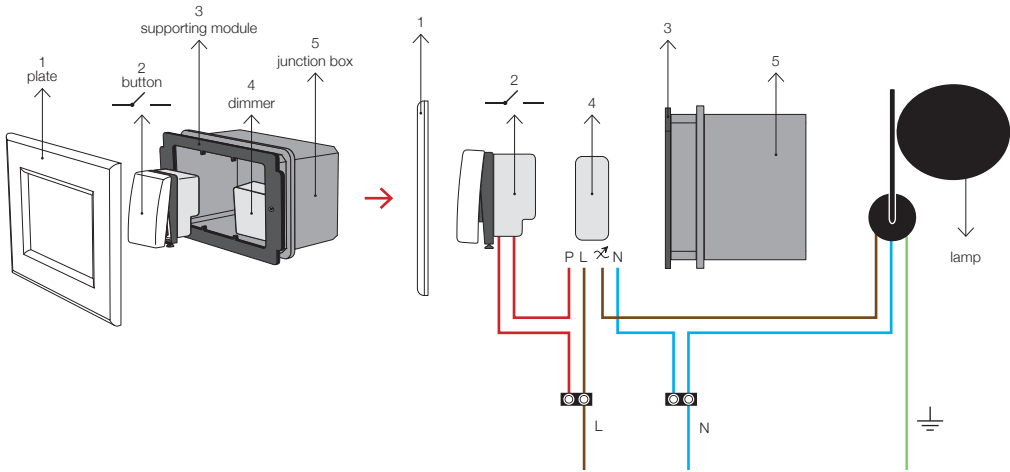

Socket-mounted or recessed

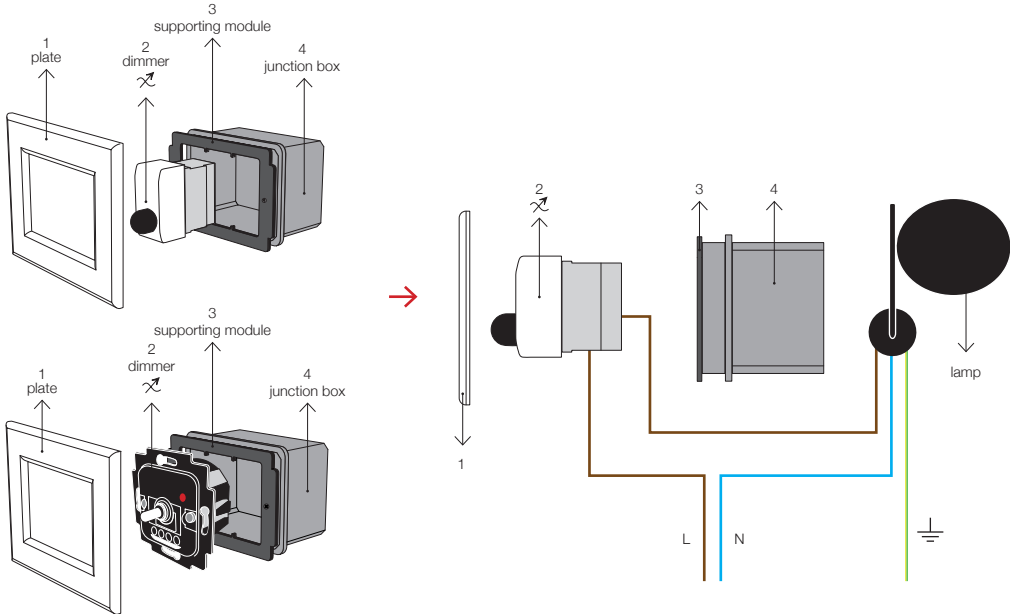



Wireless

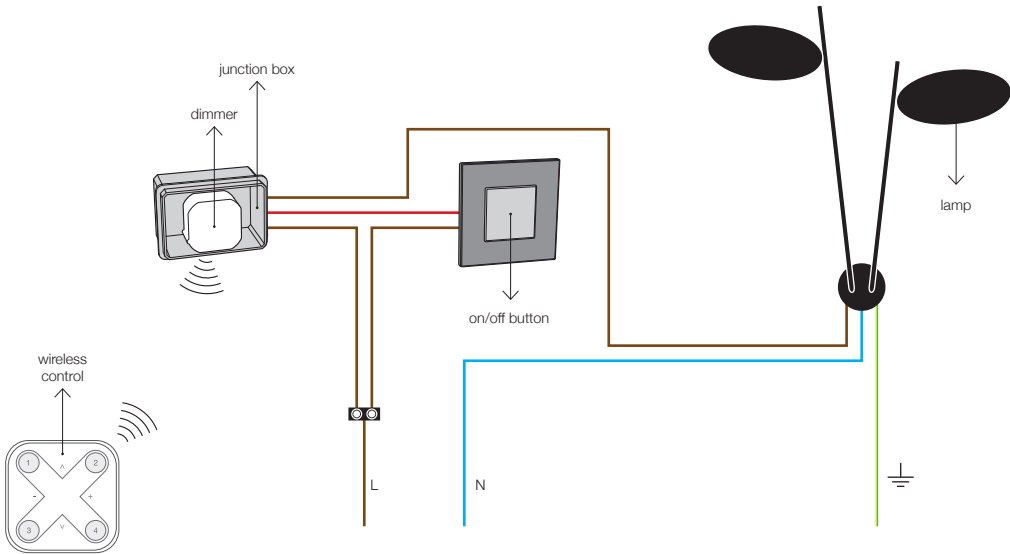





LEDERAM: COLOUR COMBINATIONS AND DETAILS

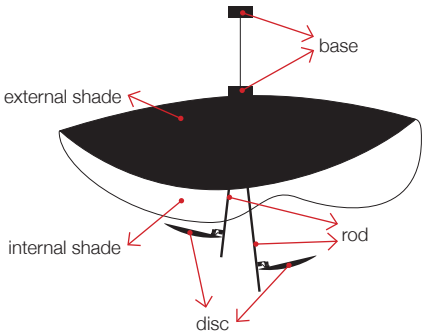Lederam Manta S1/S2/CWS1 / C150 / C180	code	shade		rods	discs	base
		external	internal			
	3	black	gold	black	gold	black
	4	black	copper	black	copper	black
	5	white	white	gold	white	white
	6	white	gold	satin	white	white
	8	white	white	satin	white	white
	10*	white	white	white	white	white
* Finish not available for model Lederam Manta S2						


Lederam C1 / C2 / C3 / WB1 / W2	code	discs	rods	base
	2	black	satin	black
	3	gold	black	black
	4	copper	black	black
	5	white	gold	white
	6	white	satin	white

Lederam W	code	disc 1		disc 2		base
		external	internal	internal	external	
	1	black	copper	copper	black	black
	2	black	gold	gold	black	black
	3	gold	gold	gold	white	white
	4	copper	copper	copper	white	white
	5	white	gold	gold	white	white
	6	white	copper	copper	white	white



Lederam W1	code	disc		joint	base
		external	internal		
	1	black	black	nickel	black
	3	gold	black	nickel	black
	4	copper	black	nickel	black
	6	white	white	nickel	white




Lederam WF	code	disc		base
		external	external	
	1	black	black	black
	3	gold	white	white
	4	copper	white	white
	6	white	white	white

Lederam F0 / F1 / F2 / F3 / T1	code	discs	rods	base	cable	dimmer
	2	black	satin	black	black	black
	3	gold	black	black	black	black
	4	copper	black	black	black	black
	5	white	gold	white	white	white
	6	white	satin	white	white	white
	12*	brass	black	black	black	black

* Finish available for model Lederam F0 only



CHANDELIER

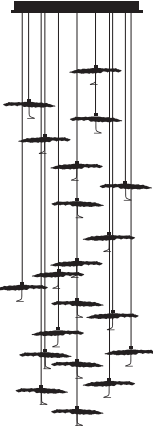GOLD MOON	JACKIE O	POSTKRISI	SWEET LIGHT
Gold Moon Chandelier is supplied with single pendants with black wires, irregular black/gold shade dia. 20 cm ca. and copper curl directing the beam of light upwards to the shade. Each shade is handmade, therefore the dimensions can slightly change from pendant to pendant. NB the minimum amount of Gold Moon per Chandelier is 20 pendants. 	Jackie O Chandelier is supplied with single pendant with blue cable and nickel curl with lens, to define the beam of light of each pendant. 	PostKrisi Chandelier is supplied with natural fibreglass spheres with a diameter of 14 or 20 cm. On request it is also available with spheres in different colours or lined with gold/silver/copper coloured leaf. 	Sweet Light Chandelier is supplied with aluminium spheres with a diameter of 10 cm. On request it is also available with brass or silver coloured spheres. 
Bases			

The Chandeliers are supplied with satin steel bases in different dimensions.



square

30x30x5 cm / 60x60x5 cm / 90x90x5 cm



rectangular

150x30x5 cm / 150x60x5 cm / 90x30x5 cm






round

Ø 40 cm / Ø 78 cm



The bases of the Chandeliers are modular and very easy to install.

The satin finish steel plates are anchored to the white painted metal frame by means of suspension chains that facilitate both installation and maintenance. They are then secured in place with square head screws; the nickel cube that covers the screw remains exposed (see drawing). The steel plate is available on request white painted.

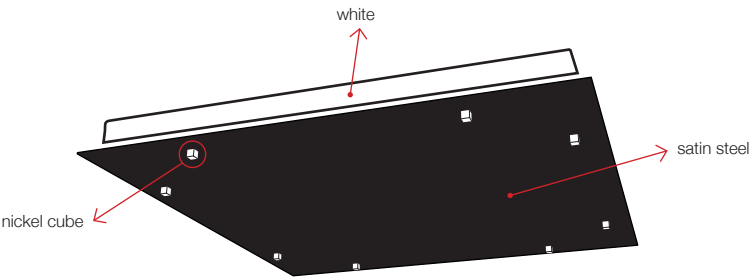

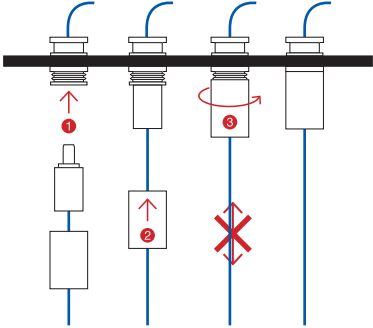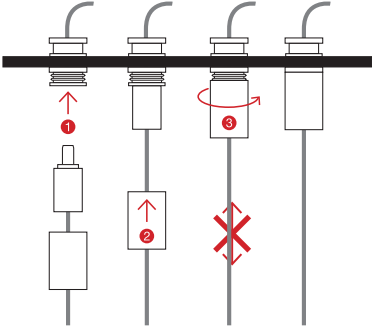GOLD MOON	JACKIE O	POSTKRISI	SWEET LIGHT
Standard Jack Mounting (NOT ADJUSTABLE HEIGHT)			
Each pendant is mounted onto the base by means of a connection jack that fits in and locks in place in a simple motion. The base can therefore be shipped separately from the pendants, facilitating both the shipping and installation itself.			
STANDARD The standard maximum height of the codified Jackie O Chandeliers is 120 cm (obtained from H of base 5 cm + max pendant height of 115 cm). Starting from the maximum height, the cable lengths descend 7 times by about 5 cm. 		STANDARD The standard maximum heights of the codified PostKrisi and Sweet Light Chandeliers are 180/300/400 cm (obtained from H of base 5 cm + max pendant height of 175/295/395 cm). 	
ON REQUEST By choosing the maximum cable length (up to max 300 cm – dimensions rounded up to the nearest 5 cm) and downsizing while retaining the proportions of the standard codes, a custom made composition can be produced. Any further customisation entails a bespoke design requiring a quotation (customized production). NB Each capillary is manually bent. A tolerance of about 1 to 2 cm on the given cables lengths must be considered as acceptable		ON REQUEST By choosing the maximum cable length (up to max 300 cm – dimensions rounded up to the nearest 5 cm) and downsizing while retaining the proportions of the standard codes, a custom made composition can be produced. Any further customisation entails a bespoke design requiring a quotation (customized production).	

On Request (ADJUSTABLE HEIGHT)


TENSIONER The version with a tensioner is available in those cases where the length of the cable requires adjustment during installation. The tensioner is supplied disassembled. Once you have placed the cable at the desired height, it must be cut and reconnected to the inside of the base (this operation helps preventing voltage drops and tangled cables inside the base). 	CABLE LOCKING The version with cable locking is available in those cases where the length of the cable requires adjustment during installation or in case of custom chandelier with bigger PostKrisi spheres (dia. 40 or 60 cm). The cable locking is supplied disassembled. Once you have placed the cable at the desired height, it must be cut and reconnected to the inside of the base (this operation helps preventing voltage drops and tangled ables inside the base). 
--	--

Custom

On request we can supply customized designs with different base dimensions, a different number of pendants or with a tensioner instead of a jack connection. The PostKrisi and Sweet Light pendants are interchangeable on the bases, therefore we can also supply mixed Chandeliers.



MACCHINA DELLA LUCE LED BOARDS

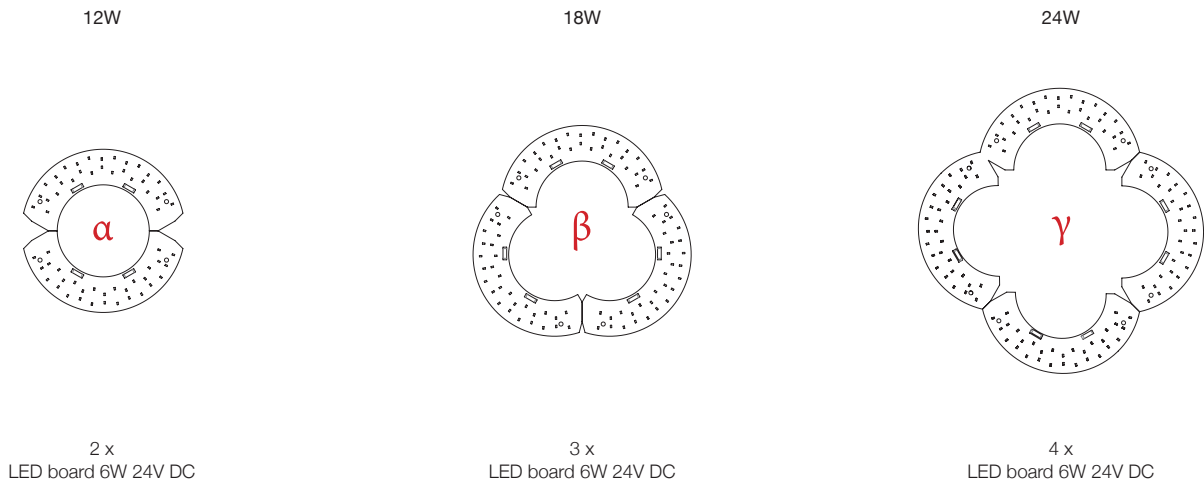


Mod. A			Mod. E	
	Ø 80 cm		Ø 50 cm	
	18W β	Ø 50 cm	12W α	
	12W α	Ø 30 cm	12W α	
12W α		Ø 18 cm	24W	
42W		4410 lumen	2520 lumen	
Mod. B			Mod. F**	
	Ø 80 cm		Ø 120 cm	
	12W α		24W γ	
	Ø 18 cm		18W β	
12W		1260 lumen	12W α	
			54W	
			5670 lumen	
Mod. C			Mod. I	
	Ø 120 cm		18W β	
	24W γ	Ø 80 cm	12W α	
	18W β	Ø 50 cm	30W	
42W		4410 lumen	3150 lumen	
Mod. D*				
	Ø 120 cm			
	18W β	Ø 80 cm		
	18W β	Ø 50 cm		
	12W α	Ø 30 cm		
	12W α	Ø 18 cm		
60W		6300 lumen		

* 110V version available with 4x α 12W / tot. 48W max
** 110V version available with 2x β 18W / 1x α 12W / tot. 48W max







STCHU-MOON LED BOARDS

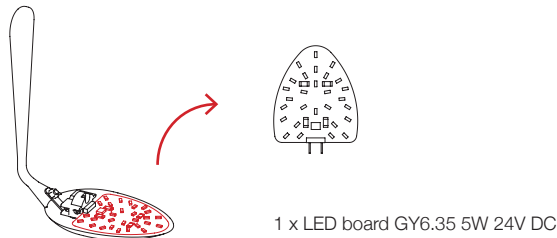

1x 5W / 500 lumen			Stchu-Moon 05	
			Stchu-Moon 01	Ø 40 cm
2x 5W / 1000 lumen			Stchu-Moon 01	Ø 60 cm
			Stchu-Moon 09	
			Stchu-Moon 02	Ø 40/60 cm
			Stchu-Moon 02	Ø 80/100 cm
4x 5W / 2000 lumen			Stchu-Moon 02	Ø 80/100 cm
6x 5W / 3000 lumen	3x		Stchu-Moon 02 Chandelier	







OUTDOOR: GEL BOX SYSTEM

	MB1	Mini gel box IP68
		5,3x3,9x2,4 cm
		(max 2 connections - connectors included)
		Price IVA / VAT excl.
	€	20,00
	MB2	Mini gel box IP68
		5,2x5,3x2,9 cm
		(max 6 connections - connectors included)
		Price IVA / VAT excl.
	€	20,00
	KP1	Extension cord kit
		5 mt
		with mini gel box IP68 for single connection
		(max 1 lamp)
	€	40,00
	ED6	Driver 10W 12V DC 220-240V IP67
		7x3,7x2,3 cm / cables 45 cm ca.
		not dimmable
		(max 6 lamps)
	€	65,00
	ED7	Driver 30W 12V DC 220-240V IP67
		11x3,7x2,3 cm / cable 12V 45 cm ca. / plug cable 200 cm
		not dimmable
		(max 20 lamps)
	ED7D	Driver 30W 12V DC 220-240V IP67
		8x8x3 cm / cables 12V 45 cm ca. / plug cable 200 cm
		Triac dimmable
		(max 20 lamps)





OUTDOOR: QUICK CONNECTORS SYSTEM

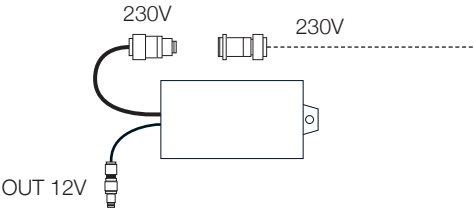	ED6CR	Driver 10W 12V DC 220-240V IP67
		230V and 12V connectors included
		3,7x2,3x7 cm - cables 45 cm ca.
		not dimmable
		(max 6 lamps)
	CRM	Quick IP68 multiple connector / 1 IN & 5 OUT 12V
		(max 5 connections)
		Price IVA / VAT excl.
	€	125,00
	CRS	Quick IP68 IN single connector
		Price IVA / VAT excl.
	€	25,00
	KP2	Extension cord kit with quick IP68 connectors CRS
		5 mt
		(max 1 lamp)
		Price IVA / VAT excl.
	€	75,00
	FKIPL	Kit box driver
		Ø 5x20 cm / cable 12V 45 cm / plug cable 200 cm
		not dimmable (driver ED7)
		standard
	FKIPLD	Kit box driver
		16x10x4 cm / cable 12V 45 cm / plug cable 200 cm
		Triac dimmable (driver ED7D)
		available on request



OUTDOOR ACCESSORIES

	MSMP	Supporting modular plate
		for More (MR70/MR100/MR130)
		32x32x32 cm
		(max 4 lamps)
		Price IVA / VAT excl. € 45,00
	MPT	Peg
		for More (MR70/MR100/MR130)
		25 cm
		Price IVA / VAT excl.
		€ 15,00
	MSM	Supporting plate
		for Medousê F
		31x31 cm ca.
		Price IVA / VAT excl.
		€ 55,00
	MDCV	Plug cable 230V standard EU (CH available on request)
		for Medousê F
		350 cm
		Price IVA / VAT excl.
		€ 25,00




MEDOUSÊ INSTALLATION SUGGESTIONS

WARNING

For stability reasons the lamp must be fastened to a solid surface such as a well or basement; in alternative it can be mounted on the modular supporting plate (ref. L / code MSM) available on request. Before installing the lamp, please check the levelling of the soil and make sure that it can support the weight of the fitting.



(Medousê weight Ø 30 cm 15 kg / Ø 50 cm 31 kg)



lamp base with holes for the fastening
(plugs not included)



Example 1

with basement and supply cable from the side

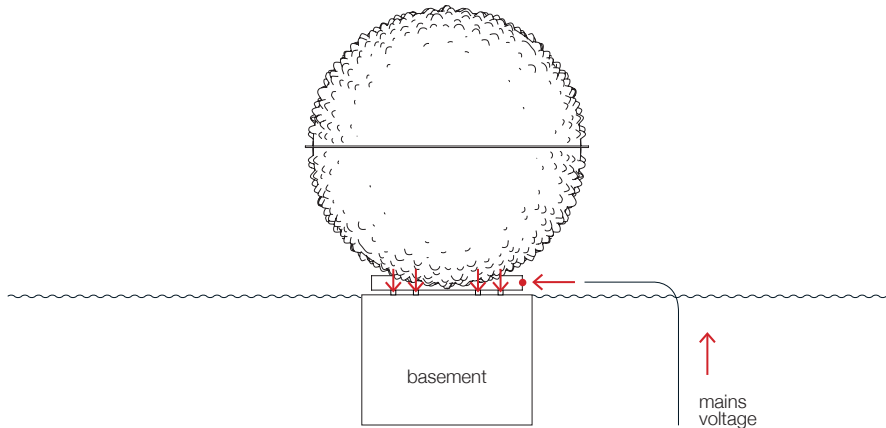



Example 2

with well and supply cable from underneath

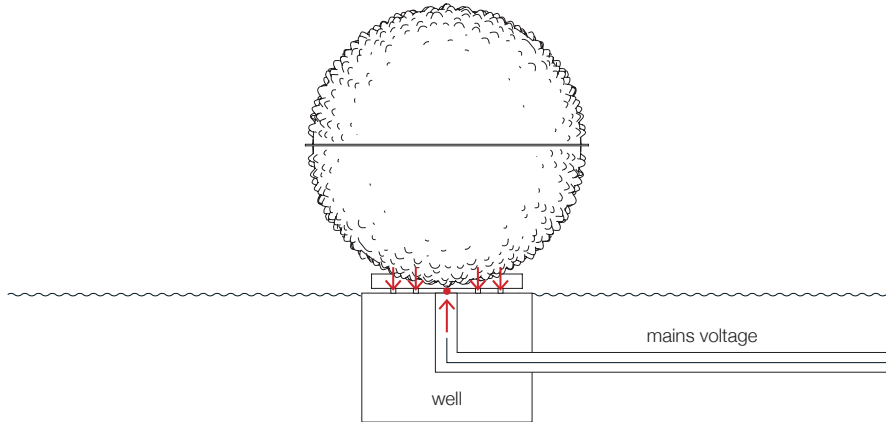

Example 3


with supporting plate 1x code MSM
with plug cable 230V 1x code MDCV

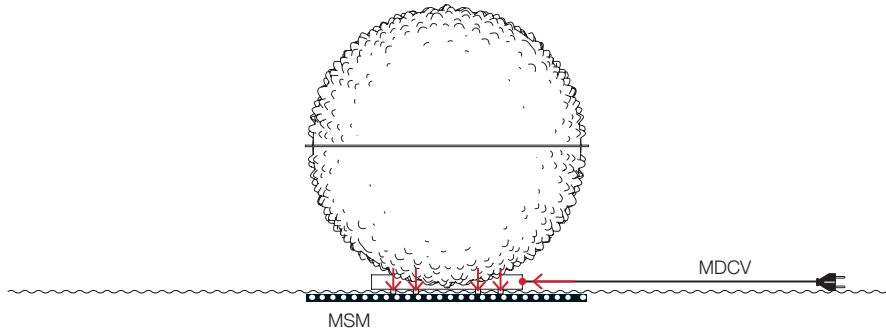




Installation suggestions for Outdoor / GEL BOX system


1	Connection type	For models	Power supply	Access. applied
	GEL BOX system (without well)	Syphasera/Syphasfera/Syphaduepassi/More	code ED6	1x code ED6 1x code MB1 1x code MB2

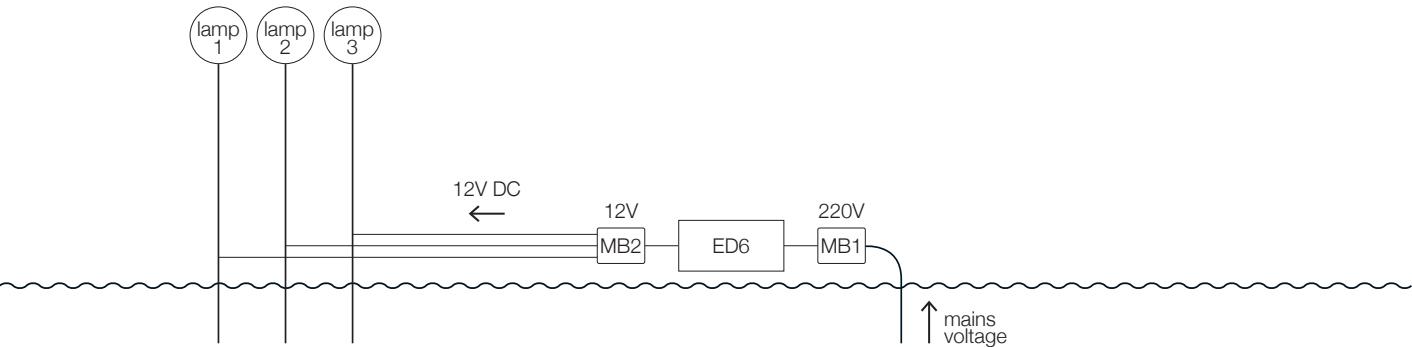

2	Connection type	For models	Power supply	Access. applied
	GEL BOX system (with well)	Syphasera/Syphasfera/Syphaduepassi/More	provided by client	1x code MB2 1x code KP1

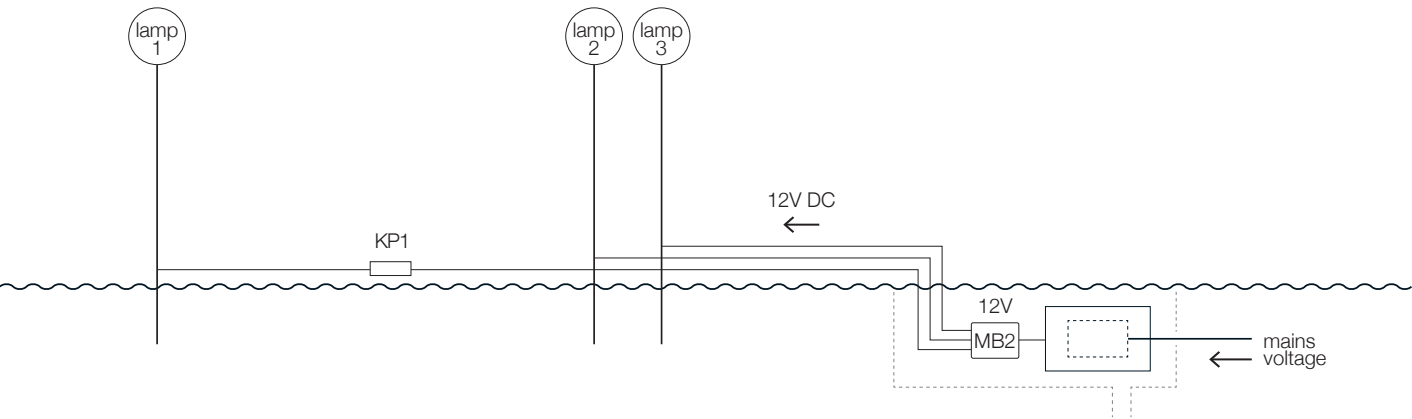

3	Connection type	For models	Power supply	Access. applied
	GEL BOX system (without well)	More (MR70/MR100/MR130)	code ED6	1x code ED6 1x code MB1 1x code MB2 1x code MSMP 3x code MPT*

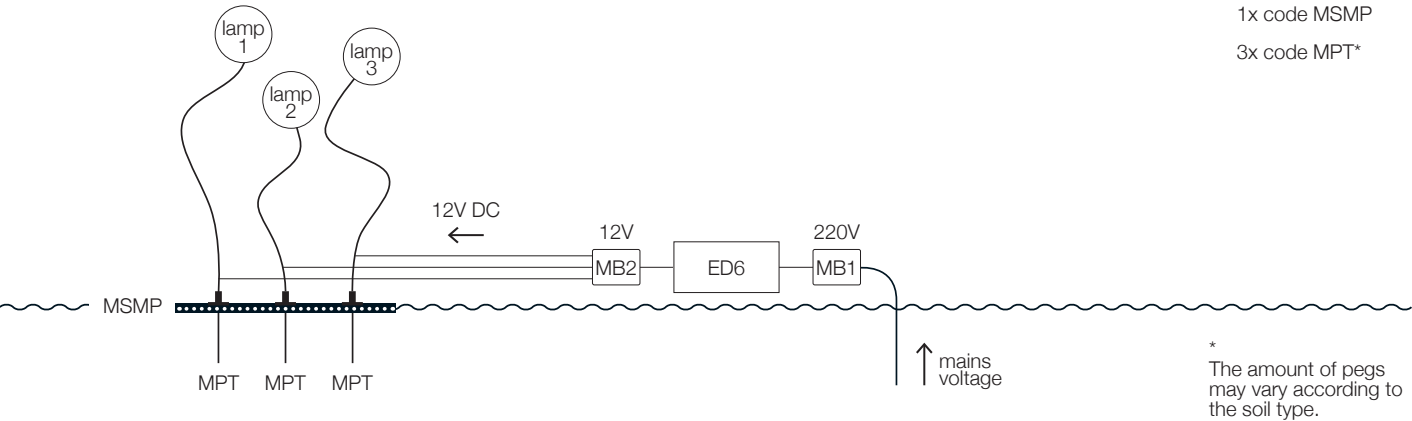


* The amount of pegs may vary according to the soil type.




Installation suggestions for Outdoor / GEL BOX system and QUICK CONNECTORS system

4	Connection type	For models	Power supply	Access. applied
	GEL BOX system (with well)	More (MR70/MR100/MR130)	provided by client	1x code MB2 1x code MSPT 3x code MPT

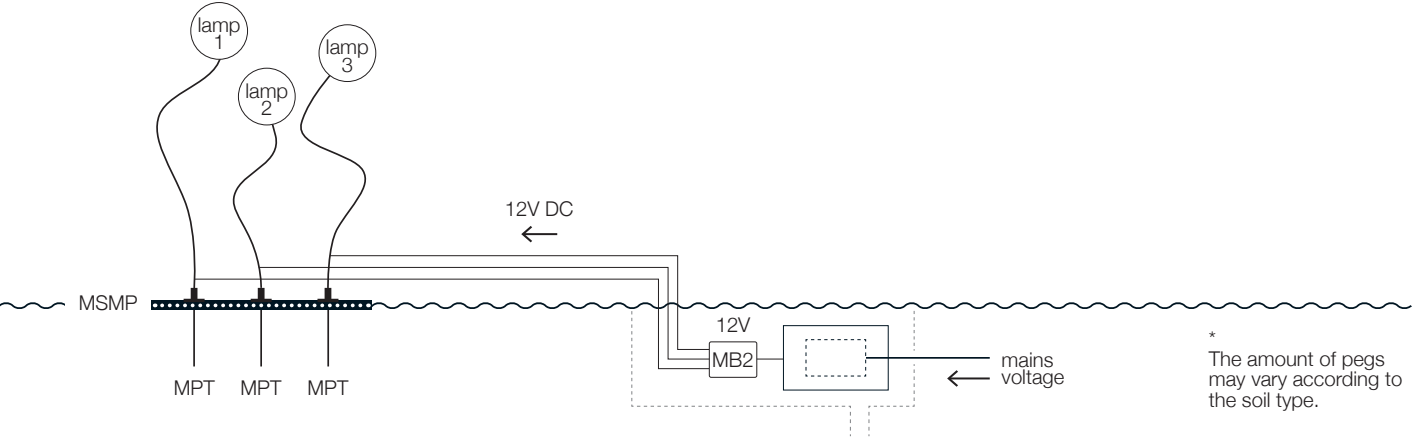


* The amount of pegs may vary according to the soil type.

5	Connection type	For models	Power supply	Access. applied
	QUICK CONNECTORS system	Syphasera/Syphasfera/Syphaduepassi/More	code ED6CR	1x code ED6CR 1x code CRM 5x code CRS 1x code KP2

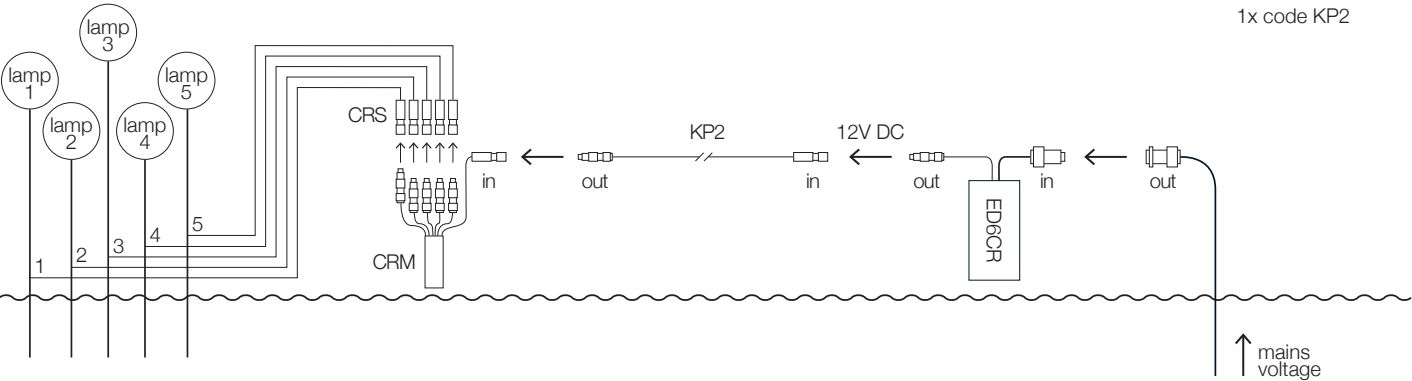


6	Connection type	For models	Power supply	Access. applied
	QUICK CONNECTORS system	Syphasera/Syphasfera/Syphaduepassi/More	code ED7CR	1x code ED7CR* 2x code CRM 9x code CRS

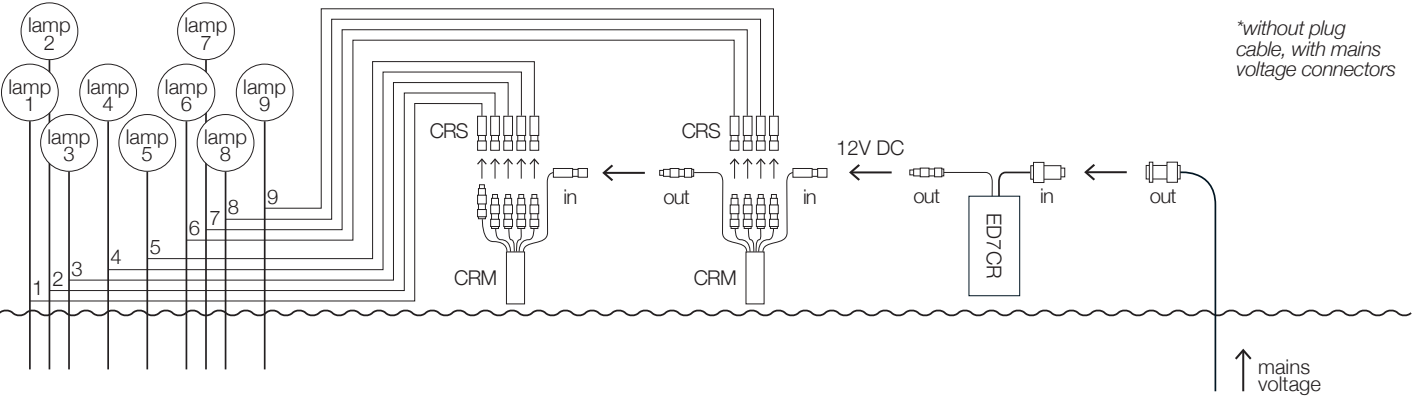

*without plug cable, with mains voltage connectors



PSU (POWER SUPPLY UNIT) KITS

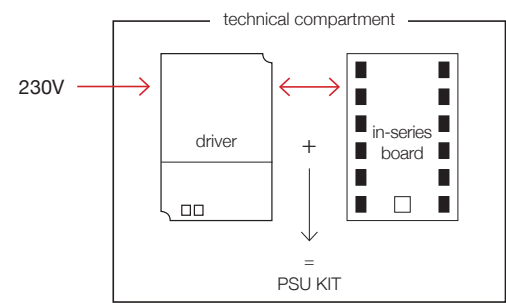

By means of the PSU kit, multiple LED lamps can be controlled simultaneously through an in-series board connected to a driver.

In the event of a failure of even a single LED, the board allows the other lamps to continue working properly.

It is advisable to install the kit in a technical compartment accessible for inspection at a maximum distance of about 5 meters from the point of installation of the jacks or tensioners, in order to avoid voltage drops.

The technical compartment must be located in an easily accessible place and large enough to accommodate both the wired in-series board and the power supply.

DRIVERS			PSU KITS		Price IVA / VAT excl.
ED0	rated voltage	220-240V / 50-60 Hz	K0WS	6W driver kit	€ 35,00 (net price)
	rated output	6W 350 mA / max 6x1W LED		not dimmable	
	dimmable	NO		max 5x1W lamps	
	dimensions	6 x 3,5 x 2 cm			
ED1	rated voltage	220-240V / 50-60 Hz	K1WS	6W driver kit	€ 50,00 (net price)
	rated output	6W 350 mA / max 6x1W LED		1...10V-PUSH dimmable	
	dimmable	YES / 1...10V or push		max 5x1W lamps	
	dimensions	6 x 5 x 2 cm			
ED4	rated voltage	110-240V / 50-60 Hz	K6WS	39W driver kit	€ 130,00 (net price)
	rated output	39W 350 mA 220/240V		1...10V-PUSH-DALI dimmable	
	dimmable	YES / 1...10V, push or DALI		max 21x1W lamps	
	dimensions	12,5 x 8 x 2,5 cm			
ALI0087	rated voltage	220-240V / 50-60 Hz	K7WS	24,5W driver kit	€ 95,00 (net price)
	rated output	min. 15/max 24,5W 350 mA 220/240V		Triac/IGBT dimmable	
	dimmable	YES / Triac/IGBT		min. 15 / max 20x1W lamps	
	dimensions	16,5 x 4,5 x 4 cm			



DIMMING WIRING DIAGRAMS

Diagram 1 - IGBT - TRIAC

- 1 wire for power supply
- 1 wire for dimming

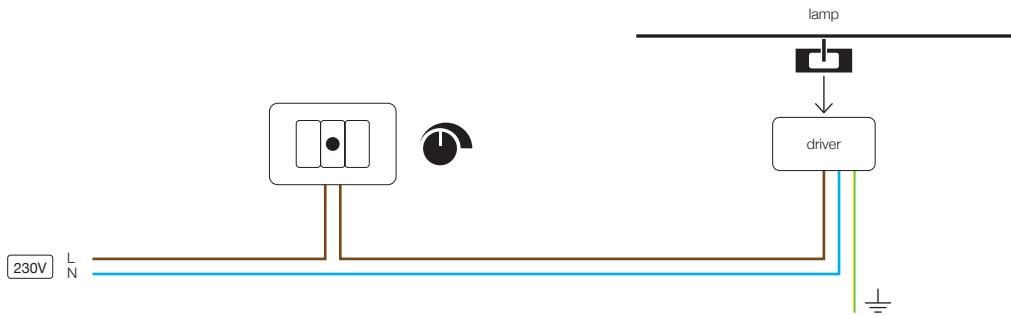


Diagram 2 - PUSH

- 2 wires for power supply
- 2 wires for dimming

WARNING: you need two extra wires, marked in red, in order to dim.


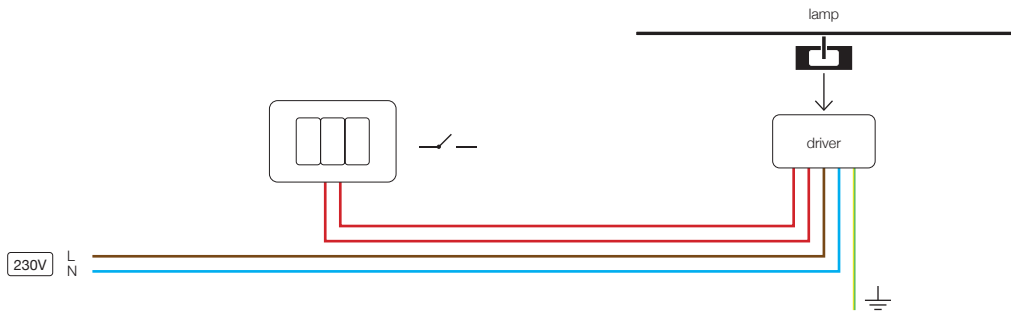


Diagram 3 - 1...10V - DALI

- 2 wires for power supply
- 2 wires for dimming

WARNING: you need two extra wires, marked in red, in order to dim.

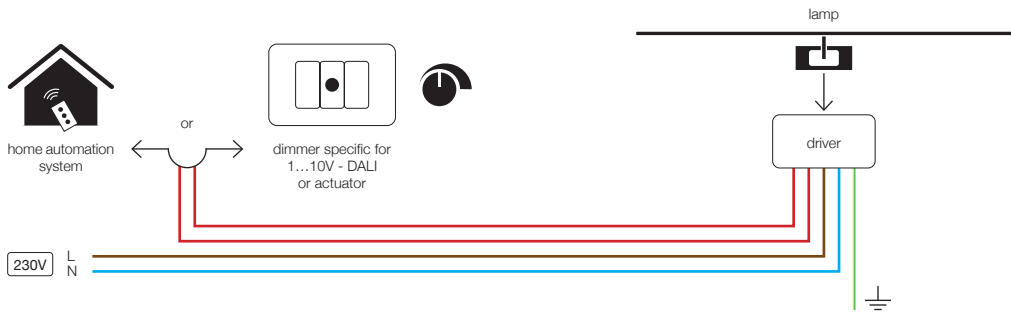

Catellani & Smith Srl

Offices
via Cimitero 1/A
I-24020 Villa di Serio BG
T. +39 035 656088
info@catellanismith.com

Show-room
T. +39 035 210193
show-room@catellanismith.com

www.catellanismith.com

