



Workbook. **2022-2023**

## GENERAL INFORMATION

Our production started off and continues to be of an artisanal nature. Our lamps are not produced in large series, from moulds or sophisticated plants but they are hand-crafted by our artisans. Slight flaws are thus not to be considered defects, but rather the typical characteristics of manual work.

Catellani & Smith declares under its own responsibility that its products meet the essential requirements of EC directives and comply with EN 60598 for luminaires and related components. Catellani & Smith lamps are built with a voltage of 220/240V. The pricelist specifies which luminaires are compatible with a voltage of 110V (with standard EC components and not with UL certified components) and which ones can be compatible upon request, by making some styling and technical modifications (price estimate to be provided).

Production is tested 100%: each product undergoes a thorough quality control that guarantees it is intact and fully functional. The guarantee covers the item for 2 years from the date of purchase, including the right to a replacement or to the repair of the product or parts thereof affected by manufacturing defects detected at the time of purchase or that arise over the next two years. **The guarantee does not cover any damage to luminaires caused by connection to incompatible dimmers or control and dimming systems.** Compatibility of our products with dimmers or home automation systems must be checked prior to purchase and it is the responsibility of the customer or person acting for him/her.

The guarantee does not include any refunds for the intervention of qualified staff (electrician, etc.) or costs for the installation/disassembly or costs related to equipment (such as scaffolding access platforms, scaffolding, etc.) required to access the luminaires and perform maintenance and control operations on them. It is advisable always to test the luminaires on the ground before final installation if they are to be fitted under special circumstances or connected to control and dimming systems.


In compliance with the regulations in force, **the manufacturer reserves the right to make any styling or technical changes without prior notice.** Such changes also include the type and wattage of light bulbs and electronic parts. These changes are due to market availability issues since it is continuously growing and evolving, and it tends to eliminate certain products in favour of others, discontinuing their production without notice (which is increasingly often the case with LED bulbs).

According to regulation 2017/1369, starting from 01/03/2022 the new energy efficiency classification comes into force, which also concerns light sources. The rating scale goes from A (maximum efficiency) to G (minimum efficiency), replacing the previous scale from A +++ to D, as required by Directive 2010/30 / EU currently in force. Based on warehouse supplies, we will update the indication of the energy class in our documentation.

The Catellani & Smith Workbook is designed to help and protect the customer in his/her choice of products. We therefore recommend that you read each section thoroughly, given the complexity of the electronic parts, and that you check the compatibility between the various components (such as dimmers, light sources, etc.) and contact qualified staff for the choice and installation of products.

Latest Creations

p. 6

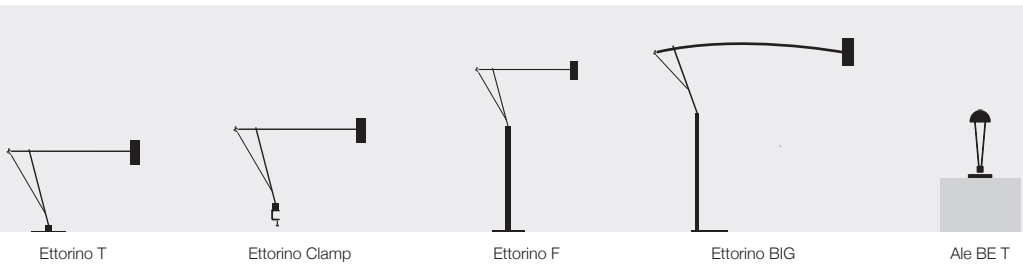

Etorino T

Etorino Clamp

Etorino F

Etorino BIG

Ale BE T



Ale C

Ale BIG

Ale W


Sfera W

Cono W

Talismano (Other Smiths)

Oggetti Senza Tempo

p. 12

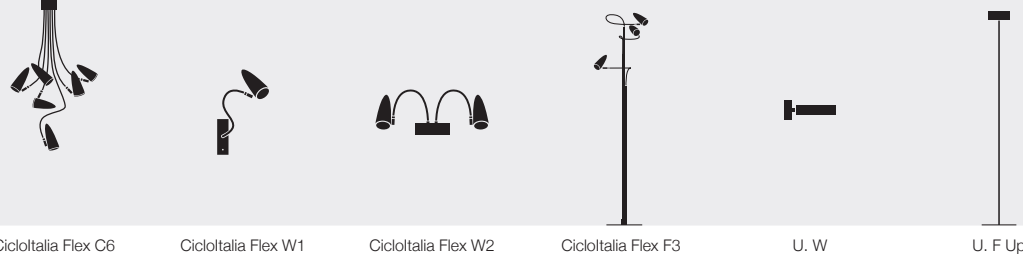

Ciclotalia Flex C6


Ciclotalia Flex W1

Ciclotalia Flex W2

Ciclotalia Flex F3

U. W

U. F Up

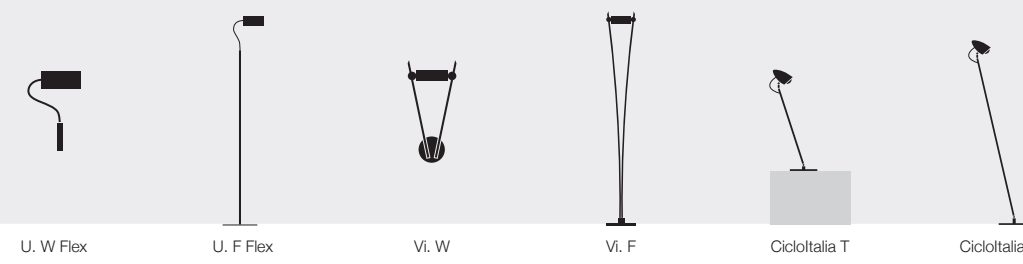

U. W Flex


U. F Flex

Vi. W

Vi. F

Ciclotalia T

Ciclotalia F

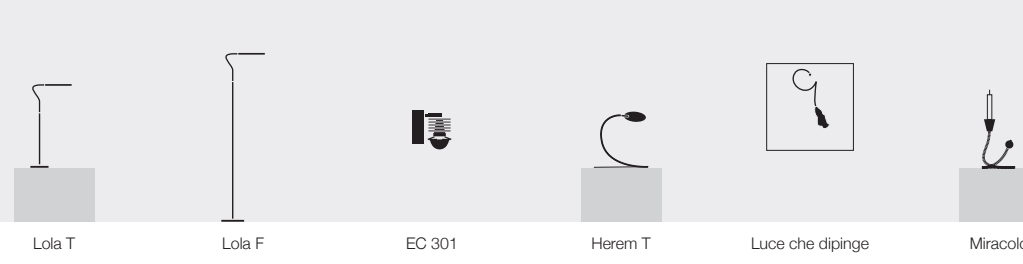

Lola T


Lola F

EC 301

Herem T

Luce che dipinge

Miracolo

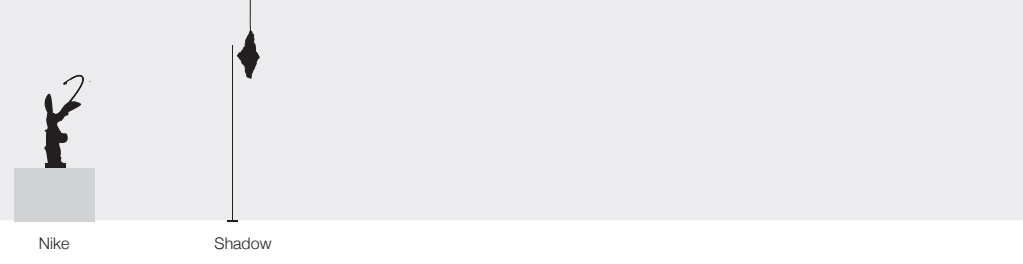


Nike

Shadow

Petits Bijoux

p. 22



28 Petits Bijoux

56 Petits Bijoux



Petites Lentilles

p. 24



22 Petites Lentilles

Lederam

p. 24



Lederam Manta S1


Lederam Manta S2

Lederam C150/180

Lederam Manta CWS1

Lederam C2

Lederam W

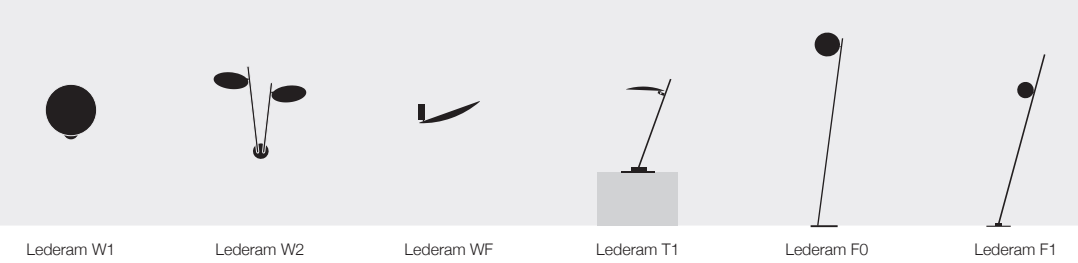

Lederam W1


Lederam W2

Lederam WF

Lederam T1

Lederam F0

Lederam F1

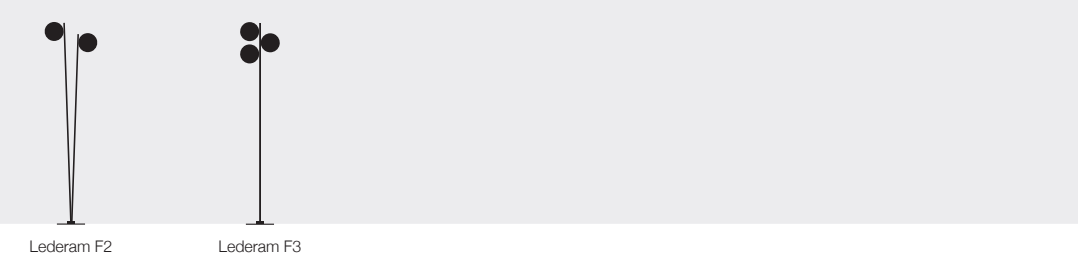


Lederam F2

Lederam F3

Sorry Giotto

p. 34

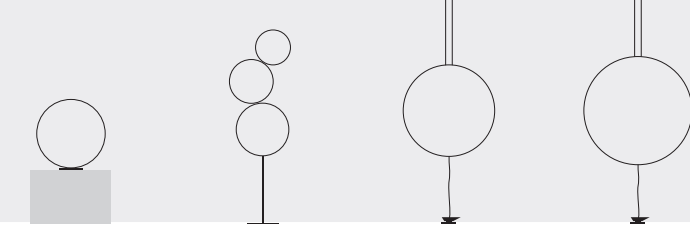

Sorry Giotto 1


Sorry Giotto 3

Sorry Giotto 9

Sorry Giotto 12

Light Stick

p. 36

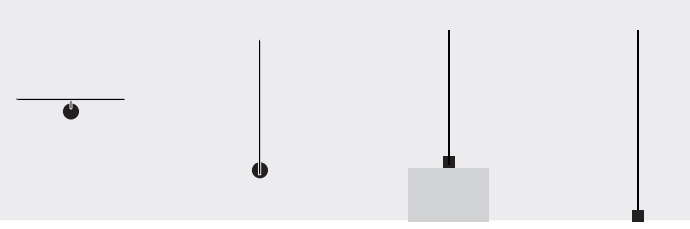

Light Stick CW


Light Stick V

Light Stick T

Light Stick F

Wa Wa

p. 38

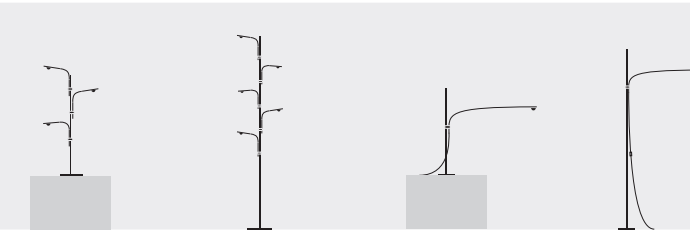

Wa Wa T

Wa Wa F

Uau T

Uau F



## Atman

p. 42



Atman

## Giulietta

p. 42



Giulietta BE T



Giulietta BE F



Giulietta W



Giulietta T



Giulietta F

## Jackie O


p. 46




Jackie O JC



Jackie O IC




Jackie O Chand. 6/9/12



Jackie O Chand. 15/20/24

## PostKrisi

p. 48



PostKrisi 50-51-52



PostKrisi 10 Malagolina



PostKrisi F 100



PostKrisi W 21-40



PostKrisi CW 70




PostKrisi 49

## Fil de Fer

p. 56



Fil de Fer



Fil de Fer Nuvola



Fil de Fer F



Sweet Light Chandelier



Sweet Light T




Uomo della Luce S

## Lucenera

p. 60



Lucenera 500



Lucenera 504



Lucenera 502



Lucenera 503



Lucenera 506



Lucenera 206



## Stchu-Moon

p. 62



Stchu-Moon 02 230V



Stchu-Moon 02



Stchu-Moon 02 Chand.



Stchu-Moon 05



Stchu-Moon R



Stchu-Moon 08



Stchu-Moon 09



Stchu-Moon 01

## Macchina della Luce


p. 68




mod. A



mod. B



mod. C



mod. D



mod. E



mod. F



mod. I

## Luci d'Oro

p. 72



Malagola 27/55/110



Gold Moon JC/IC



Gold Moon Chandelier



DiscO



Luna W



Luna Piena



Full Moon



Francesca



Luce d'Oro T



Luce d'Oro F



Luna



Gemma



Colonna



Pepita 102



Pepita 65



## Turciù

p. 80



Turciù 36



Turciù 21



Turciù 16



Turciù 9



Turciù 9



Turciù 5



Turciù 3



Turciù 2



Bonsai



Sottovento



Albero della Luce

## Medousê (outdoor)

p. 86




Medousê W



Medousê F



More



More 0



More F

## Sypha

p. 90



Syphasera



Syphasera



Syphaduepassi

## Fil de Fer

p. 92



Fil de Fer



Fil de Fer F



Uomo della Luce XXL

## Limited Edition

p. 94



Trenta



## Other Smiths

p. 94



Alchemie T

## Technical information

p. 97

Mains voltage LED

p. 98

Outdoor accessories

p. 108

Lederam: colour combinations and details

p. 100

Medousê installation suggestions

p. 109

Chandelier

p. 102

Installation suggestions for Sypha/More

p. 110

Macchina della Luce LED boards

p. 104

PSU (Power Supply Unit) Kits for Jackie O and Gold Moon

p. 112

Stchu-Moon LED boards

p. 105

Drivers @24V DC

p. 113

Outdoor: Gel box system

p. 106

Instructions for the connection of multiple Pepita and Ametista

p. 114

Outdoor: Quick connectors system

p. 107

Dimming wiring diagrams


p. 115

Latest creations

[ *Finishes* ] // **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. / **Hand painting** is chosen for its deliberate textured effect and uniqueness of result. Any irregularities or unevenness in the coating cannot be considered defect, but rather a hallmark of the artisanal crafting process.


[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 21




Ettorino T / table lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
ETRT / colourful (white/red/yellow/blue) / red man silhouette / nickel dimmer / blue wire	€	1.650,00	110-240V	constant current LED 300 mA	COB LED	10W	1441	2700	80	E	plug driver*	included (memory last step)
ETRTB / black / red man silhouette / nickel dimmer / black wire	€	1.550,00										
ETRTW / white / red man silhouette / nickel dimmer / blue wire	€	1.550,00										

p. 25




Ettorino Clamp / table lamp with clamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
ETRC / colourful (white/red/yellow/blue) / red man silhouette / nickel dimmer / blue wire	€	1.700,00	110-240V	constant current LED 300 mA	COB LED	10W	1441	2700	80	E	plug driver*	included (memory last step)
ETRCB / black / red man silhouette / nickel dimmer / black wire	€	1.600,00										
ETRCW / white / red man silhouette / nickel dimmer / blue wire	€	1.600,00										


p. 27




Ettorino F / standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
ETRF / colourful (white/red/yellow/blue) / red man silhouette / blue wire	€	1.950,00	110-240V	constant current LED 300 mA	COB LED	10W	1441	2700	80	E	plug driver*	push dimmer
ETRFB / black / red man silhouette / black wire	€	1.850,00										
ETRFW / white / red man silhouette / blue wire	€	1.850,00										

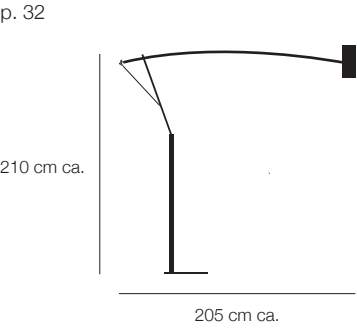


Ettorino BIG / standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
ETRBIG / colourful (white/red/yellow/blue) / red man silhouette / black wire	€	4.850,00	110-240V	constant current LED	COB LED	15W	2187	2700	80	D	plug driver*	push dimmer (downwards)
ETRBIGB / black / red man silhouette / black wire	€	4.550,00			interch. LED	1W	149	2700	80	D		on/off (upwards)
ETRBIGW / white / red man silhouette / black wire	€	4.550,00										



Ale BE T / battery table lamp			battery	source	type	watt	lumen	K	CRI	en. class	battery charger	dimmer
ALEBT / colourful (white/red/yellow/blue) / black fly	€	800,00	Li-ION 3,7V 4100 mA/h	constant voltage LED	LED board	1,5W	219	2700	>80	D	input 110/240V output 5V@1,2 A (EU plug only)	on/off switch
ALEBTFL / fluo (blue/yellow/magenta) / black fly	€	800,00										
ALEBTB / black / white fly	€	700,00										
ALEBTW / white / black fly	€	700,00										




Ale C / ceiling lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
ALEC / colourful (white/red/yellow/blue)	€	650,00	240V (110V available on request)	constant current LED 270 mA	COB LED	9W	1296	2700	80	E	constant current driver	IGBT/Triac dimmable
ALECFL / fluo (orange/blue/yellow/magenta)	€	650,00										
ALECB / black	€	550,00										
ALECW / white	€	550,00										



Ale BIG / table lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
ALEBIG / colourful (white/red/yellow/blue) / black fly and wire	€	3.600,00	110-240V	constant current LED	COB LED	15W	2187	2700	80	D	plug driver*	push dimmer
ALEBIGFL / fluo (orange/blue/yellow/magenta) / black fly and wire	€	3.600,00										
ALEBIGB / black / white fly / black wire	€	3.450,00										
ALEBIGW / white / black fly and wire	€	3.450,00										

p. 53




Ale W / wall lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
ALEW / colourful (white base / blue shade) / black fly	€ 850,00	240V (110V available on request)	constant current LED 500 mA	LED board	13W	2019	2700	>80	D	constant current driver	IGBT/Triac dimmable
ALEWFL / fluo (white base / magenta shade) / black fly	€ 850,00										
ALEWBB / black (white base / black shade) / white fly	€ 750,00										
ALEWWW / white (white base and shade) / black fly	€ 750,00										

p. 57




Sfera W / wall lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SFWNC / nickel mirrored	€ 1.195,00	240V (110V available on request)	constant current LED 450 mA	COB LED	15W	2187	2700	80	D	constant current driver	IGBT/Triac dimmable

p. 59



Cono W / wall lamp with floor connection		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
CNW / blue/internal irregular with gold coloured leaf / black wire	€ 2.750,00	110-240V	constant current LED 450mA	COB LED	15W	2187	2700	80	D	plug driver*	push dimmer
			LED bulb	G4 bulb	1W	75	2700	80	G		on/off switch

p. 63



Talismano (Other Smiths) / table lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
TLST / brass/iridescent glass / black dimmer and wire	€ 1.495,00	110-240V	constant voltage 24V LED	LED flexible board	6W	2187	2700	>80	D	plug driver*	included (memory last step)




## Oggetti Senza Tempo

[ *Finishes* ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Copper** is a very malleable and ductile metal, chosen for its high thermal and electrical conductivity, as well as for its typical reddish-orange colour. We use it untreated, therefore it may oxidise with time, forming a green patina. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / ( **\*\*** ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard. / ( **\*\*\*** ) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

p. 69

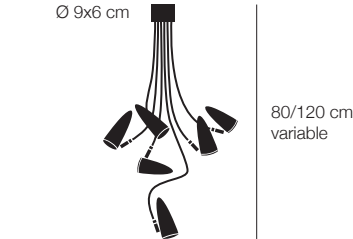

CicloItalia Flex C6 / ceiling/pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
CIC6B / black base and spotlights / brass flex and details / glass lens	€	3.145,00	220-240V (110V available on request)	low voltage LED 12V	GU 5.3 bulb	6x7,5W 45W	3780	3000	90	F	low voltage LED transformer	YES Triac*
CIC6W / white base and spotlights / brass flex and details / glass lens	€	3.145,00										

flex: 5x Ø1,3x50 cm; 1x Ø1,2x100 cm

p. 70



CicloItalia Flex W1 / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
CIW1B / black base and spotlight / brass flex and details / glass lens / with on/off	€	620,00	220-240V (110V available on request)	low voltage LED 12V	GU 5.3 bulb	1x7,5W	630	3000	90	F	low voltage LED transformer	NO on/off switch
CIW1W / white base and spotlight / brass flex and details / glass lens / with on/off	€	620,00										

base: 17x5x4 cm ca.


p. 71



CicloItalia Flex W2 / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
CIW2B / black base and spotlights / brass flex and details / glass lens	€	945,00	220-240V (110V available on request)	low voltage LED 12V	GU 5.3 bulb	2x7,5W 15W	1260	3000	90	F	low voltage LED transformer	YES Triac*
CIW2W / white base and spotlights / brass flex and details / glass lens	€	945,00										


base: 17x5x4 cm ca.

p. 72




CicloItalia Flex F3 / standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
CIF3BM / black rod/base/spotlights / brass flex and details / glass lens	€	2.275,00	110-240V	low voltage LED 12V	GU 5.3 bulb	3x7,5W 22,5W	1890	3000	90	F	plug driver**	included (memory last step)
CIF3WM / white rod/base/spotlights / brass flex and details / glass lens	€	2.275,00										

p. 75



U. W / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
UWJB / black base and shade / brass joint	€	435,00	220-240V (110V available on request)	constant current LED 270 mA	COB LED	1x9W	1324	2700	80	A++	constant current driver	YES IGBT/Triac***
UWJW / white base and shade / brass joint	€	435,00										

p. 77




U. F Up / standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
UFUB / black rod/base/shade (internally gold) / steel silhouette with magnet	€	1.145,00	110-240V	constant current LED 500 mA	COB LED	1x17W	2500	2700	80	D	plug driver**	included (memory last step)
UFUW / white rod/base/shade (internally gold) / steel silhouette with magnet	€	1.145,00										

p. 79




U. W Flex / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
UWFB / black base and shade / brass flex	€	590,00	220-240V (110V available on request)	constant current LED 450 mA	COB LED	1x15W	2200	2700	80	D	constant current driver	YES Triac***
UWFW / white base and shade / brass flex	€	590,00										

p. 81




U. F Flex / standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
UFFB / black base and shade / brass flex	€	1.045,00	110-240V	constant current LED 450 mA	COB LED	1x15W	2200	2700	80	D	plug driver**	included (memory last step)
UFFW / white base and shade / brass flex	€	1.045,00										

p. 83




Vi. W / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
VIWB / black structure and shade / brass details	€	870,00	220-240V (110V available on request)	constant current LED 450 mA	COB LED	1x15W	2200	2700	80	D	constant current driver	YES Triac***
VIWW / white structure and shade / brass details	€	870,00										

p. 85




Vi. F / standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
VIFB / black structure and shade / brass details	€	1.645,00	110-240V	constant current LED 450 mA	COB LED	1x15W	2200	2700	80	D	plug driver**	included (memory last step)
VIFW / white structure and shade / brass details	€	1.645,00										

p. 86



CicloItalia T / table lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
CIBR / brass base and structure / black dimmer / black wire	€	1.160,00	110-240V	constant current LED 500 mA	COB LED	1x5W	600	2700	80	F	plug driver max 18W	included


p. 90



CicloItalia F / standing lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
CIFBR / black base / brass structure / black wire	€ 1.330,00	220-240V	constant current LED 350 mA	COB LED	1x5W	600	2700	80	F	plug driver (EU plug only)	included touch (memory 0%)
CIFBRM / black base / brass structure / black dimmer and wire	€ 1.330,00	110-240V								plug driver**	included (memory last step)


p. 93



Lola T / table lamp

LBR / brass structure / copper stick / black wire / black dimmer	€ 840,00	110-240V	constant current LED 350 mA	interch. LED	3x1W 3W	420	2700	85	D	plug driver**	included (memory last step)
--	----------	----------	--------------------------------	--------------	------------	-----	------	----	---	---------------	--------------------------------

p. 95



Lola F / standing lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LFBR / brass structure / copper stick / black wire	€ 1.010,00	220-240V	constant current LED 350 mA	interch. LED	3x1W 3W	420	2700	85	D	plug driver (EU plug only)	included touch (memory 0%)
LFBRM / brass structure / copper stick / black dimmer and wire	€ 1.010,00	110-240V								plug driver**	included (memory last step)


p. 97



EC 301 / wall or ceiling lamp


		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
EC301JB / black structure and base / brass joint and lens holder / glass lens	€ 395,00	220-240V	constant current LED 500 mA	COB LED	1x5W 5W	600	2700	600	F	constant current driver	YES IGBT/Triac***
EC301JW / white structure and base / brass joint and lens holder / glass lens	€ 395,00										

p. 99




Herem T / USB table lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
HRT / brass flex and shade		€	455,00	110-240V	constant voltage LED 5V	LED board	1x2,8W	300	2700	>90	D	USB plug driver 5V (EU plug only)	included touch-less

p. 100




Luce che dipinge / wall lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming	
LD5L / white canvas / black pipe / black wrap screen				€ 950,00	240V (110V available on request)	extra-low-voltage 12V DC LED bulb	G4	1x1,5W	150	2700	85	A+	low voltage driver	NO

p. 102



Miracolo / table candle holder				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MRBR / brass flex and details				€ 185,00	-	candle (included)	-	-	-	-	-	-	-


p. 103



Nike / table lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer	
NKL / white ceramic chalk statue / nickel flex / glass lens / blue wire / black dimmer				€ 1.230,00	220-240V (EU plug only)	constant current LED 350 mA	interch. LED	1x1W	140	2700	85	D	constant current plug driver (EU plug only)	included (memory 100%)
NKLPL / white ceramic chalk statue / nickel flex / glass lens / blue wire / black dimmer				€ 1.230,00	110-240V (all other plugs)	constant current LED 350 mA	interch. LED	1x1W	140	2700	85	D	constant current plug driver (all other plugs)**	included (memory last step)



p. 104



Shadow / standing lamp with net

SW / black structure / brass net / black wire and dimmer

€ 980,00


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 350 mA	interch. LED	1x1W	140	2700	85	D	constant current plug driver**	included (memory last step)

Petits Bijoux

[ *Finishes* ] // **Satin brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( \* ) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

p. 108



28 Petits Bijoux / pendant lamp

PB28 / untreated brass rings / white base / transparent covers with brass clips


€ 5.395,00

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V* or 240V	constant voltage 24V LED	interch. LED board	28x1W 28W	4004	2700	>80	A++	constant voltage driver	YES IGBT/Triac*

\*110V version available with white base Ø 21x10,5 cm

weight 6 kg

p. 111

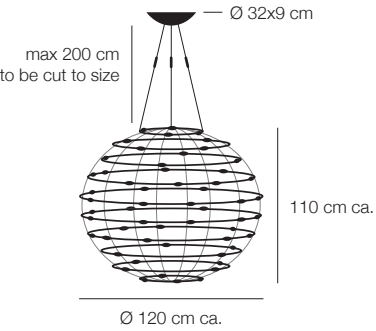

56 Petits Bijoux / pendant lamp

PB56 / untreated brass rings / white base / transparent covers with brass clips

€ 8.500,00


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V or 240V	constant voltage 24V LED	interch. LED board	56x1W 56W	8008	2700	>80	A++	constant voltage driver	YES IGBT/Triac*

weight 13 kg

Petites Lentilles

[ *Finishes* ] // **Satin brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) The remote control provided allows to switch on and dim independently the LED strip on the base and the LEDs on the oval. The system (we use Casambi) can be programmed and controlled also via app.

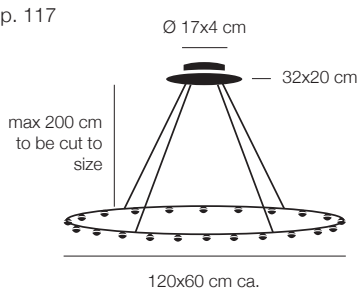


22 Petites Lentilles / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PL22 / untreated brass oval / white base / transparent lens with brass holder	€ 4.150,00	240V (110V available on request)	constant voltage 24V LED	interch. LED board	22x1W 22W	3146	2700	>80	A++	constant voltage driver	wireless independent (remote control incl.)*
				low voltage LED strip (directed upwards)	4W	150					

weight 3,6 kg

Lederam

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) Mains voltage LED modules and COB LED are dimmable using IGBT (trailing edge) dimmers designed specifically for LED sources. Their dimming is extremely delicate: incompatible dimmers may cause irreparable damage to the LED. Some dimmers on the market have a NO button (Normally Open) or are specific connector socket-mounted or recessed. They are generally inserted into junction boxes; their limited thickness facilitates the installer's task and makes the dimmer fit for installation even in shallow boxes. Dimmers with an integrated radio dimmer for both manual (NO button) and wireless control are also available. It is important to note that during adjustment the dimming appears less precise, with some flickering. Furthermore some types of dimmer, even if they have been recommended by the manufacturers themselves, have visible flickering (almost essentially down to a minimum) depending on the mains and on the type of interference present. The problem can be solved by increasing the minimum value setting of the potentiometer on the dimmer. Low voltage DALI or 1...10V versions available on request. / ( **\*\*** ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

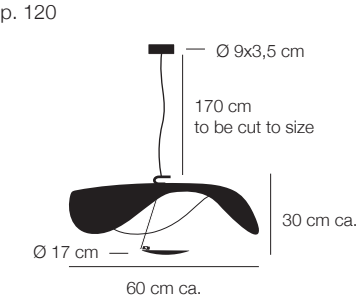


Lederam Manta S1 / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LS13 / shade black/gold / black rod / gold disc / black base	€ 870,00	240V  (110V)	mains voltage LED  (mains voltage LED)	LED module  (LED module)	1x17W  (1x14W)	1700  (1540)	2700  (2700)	> 80  (80)	A+  (A+)		YES*  (YES*)
LS14 / shade black/copper / black rod / copper disc / black base	€ 870,00										
LS15 / shade white/white / gold rod / white disc / white base	€ 770,00										
LS16 / shade white/gold / satin rod / white disc / white base	€ 870,00										
LS18 / shade white/white / satin rod / white disc / white base	€ 770,00										
LS110 / shade white/white / white rod / white disc / white base	€ 770,00										

weight 2 kg


p. 123

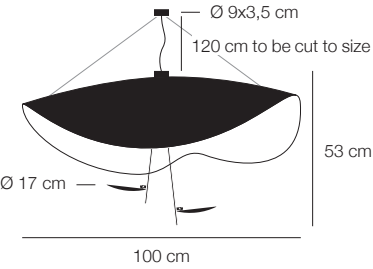

Lederam Manta S2 / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LS23 / shade black/gold / black rods / gold discs / black bases	€	2.055,00	240V	mains voltage LED	LED module	2x17W 34W	3400	2700	> 80	A+	-	YES*
LS24 / shade black/copper / black rods / copper discs / black bases	€	2.055,00										
LS25 / shade white/white / gold rods / white discs / white bases	€	1.905,00										
LS26 / shade white/gold / satin rods / white discs / white bases	€	2.055,00	(110V)	(mains voltage LED)	(LED module)	(2x14W 28W)	(3080)	(2700)	(80)	(A+)	-	(YES*)
LS28 / shade white/white / satin rods / white discs / white bases	€	1.905,00										


weight 5,5 kg

p. 124




Lederam C150 / ceiling lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LC1503 / shade black/gold / black rod / gold disc / black base	€	595,00	240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
LC1504 / shade black/copper / black rod / copper disc / black base	€	595,00										
LC1505 / shade white/white / gold rod / white disc / white base	€	495,00										
LC1506 / shade white/gold / satin rod / white disc / white base	€	595,00	(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(YES*)
LC1508 / shade white/white / satin rod / white disc / white base	€	495,00										
LC15010 / shade white/white / white rod / white disc / white base	€	495,00										

p. 125

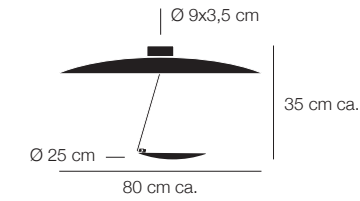


Lederam C180 / ceiling lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LC1803 / shade black/gold / black rod / gold disc / black base	€	875,00	110V or 240V	mains voltage LED	COB LED	1x30W	2190	2700	90	A+	-	YES*
LC1804 / shade black/copper / black rod / copper disc / black base	€	875,00										
LC1805 / shade white/white / gold rod / white disc / white base	€	725,00										
LC1806 / shade white/gold / satin rod / white disc / white base	€	875,00										
LC1808 / shade white/white / satin rod / white disc / white base	€	725,00										
LC18010 / shade white/white / white rod / white disc / white base	€	725,00										

p. 128

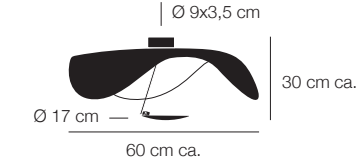

Lederam Manta CWS1 / ceiling or wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LCWS13 / shade black/gold / black rod / gold disc / black base	€	810,00	240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
LCWS14 / shade black/copper / black rod / copper disc / black base	€	810,00										
LCWS15 / shade white/white / gold rod / white disc / white base	€	710,00										
LCWS16 / shade white/gold / satin rod / white disc / white base	€	810,00	(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(YES*)
LCWS18 / shade white/white / satin rod / white disc / white base	€	710,00										
LCWS110 / shade white/white / white rod / white disc / white base	€	710,00										






Lederam C2 / ceiling lamp

LC22 / black discs / satin rods / black base	€	690,00
LC23 / gold discs / black rods / black base	€	750,00
LC24 / copper discs / black rods / black base	€	750,00
LC25 / white discs / gold rods / white base	€	690,00
LC26 / white discs / satin rods / white base	€	690,00


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	2x17W 34W	3400	2700	> 80	A+	-	YES*
(110V)	(mains voltage LED)	(LED module)	(2x14W 28W)	(3080)	(2700)	(80)	(A+)	-	(YES*)



Lederam W 17 / wall lamp

LW171 / disc D1 black/copper - disc D2 copper/black / black base	€	380,00
LW172 / disc D1 black/gold - disc D2 gold/black / black base	€	380,00
LW173 / disc D1 gold/gold - disc D2 gold/white / white base	€	410,00
LW174 / disc D1 copper/copper - disc D2 copper/white / white base	€	410,00
LW175 / disc D1 white/gold - disc D2 gold/white / white base	€	380,00
LW176 / disc D1 white/copper - disc D2 copper/white / white base	€	380,00


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(YES*)



Lederam W 25 / wall lamp

LW251 / disc D1 black/copper - disc D2 copper/black / black base	€	435,00
LW252 / disc D1 black/gold - disc D2 gold/black / black base	€	435,00
LW253 / disc D1 gold/gold - disc D2 gold/white / white base	€	475,00
LW254 / disc D1 copper/copper - disc D2 copper/white / white base	€	475,00
LW255 / disc D1 white/gold - disc D2 gold/white / white base	€	435,00
LW256 / disc D1 white/copper - disc D2 copper/white / white base	€	435,00

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(YES*)




Lederam W1 17 / wall lamp

LW1171 / black disc / black base	€	310,00
LW1173 / gold/black disc / black base	€	340,00
LW1174 / copper/black disc / black base	€	340,00
LW1176 / white disc / white base	€	310,00


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(YES*)

p. 132




Lederam W1 25 / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LW1251 / disc Ø 25 cm black / black base	€	365,00	240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
LW1253 / disc Ø 25 cm gold/black / black base	€	405,00										
LW1254 / disc Ø 25 cm copper/black/ black base	€	405,00	(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(YES*)
LW1256 / disc Ø 25 cm white / white base	€	365,00										

p. 133




Lederam W2 / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LW22 / black discs / satin rods / black base	€	690,00	240V	mains voltage LED	LED module	2x17W 34W	3400	2700	> 80	A+	-	YES*
LW23 / gold discs / black rods / black base	€	750,00										
LW24 / copper discs / black rods / black base	€	750,00	(110V)	(mains voltage LED)	(LED module)	(2x14W 28W)	(3080)	(2700)	(80)	(A+)	-	(YES*)
LW25 / white discs / gold rods / white base	€	690,00										
LW26 / white discs / satin rods / white base	€	690,00										

p. 134



Lederam WF 17 / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LWF171 / black disc / black base	€	270,00	240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+	-	YES*
LWF173 / gold/white disc / white base	€	300,00										
LWF174 / copper/white disc / white base	€	300,00	(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(YES*)
LWF176 / white disc / white base	€	270,00										


p. 134



Lederam WF 25 / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LWF251 / black disc / black base	€	325,00	110V or 240V	mains voltage LED	LED module	1x28W	2580	2700	80	A+	-	YES*
LWF253 / gold/white disc / white base	€	365,00										
LWF254 / copper/white disc / white base	€	365,00										
LWF256 / white disc / white base	€	325,00										




p. 135



Lederam T1 / table lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LT12LVO / black disc / satin rod / black base/cable/dimmer	€ 570,00	110-240V	costant current LED	COB LED	1x10W	1441	2700	80	E	plug driver**	included (memory last step)
LT13LVO / gold disc / black rod / black base/cable/dimmer	€ 600,00										
LT14LVO / copper disc / black rod / black base/cable/dimmer	€ 600,00										
LT15LVO / white disc / gold rod / white base / black dimmer / blue cable	€ 570,00										
LT16LVO / white disc / satin rod / white base / black dimmer / blue cable	€ 570,00										


p. 136

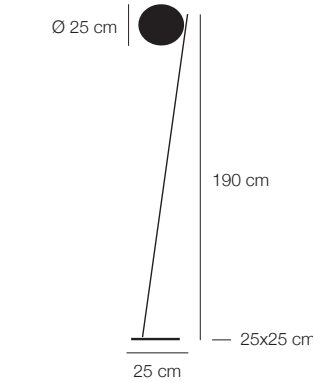

Lederam F0 / standing lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LF012LVO / brass disc / black rod / black base/cable/dimmer	€ 1.165,00	110-240V	costant current LED 500 mA	COB LED	1x17W	2500	2700	80	A++	plug driver**	included (memory last step)
LF02LVO / black disc / satin rod / black base/cable/dimmer	€ 905,00										
LF03LVO / gold disc / black rod / black base/cable/dimmer	€ 935,00										
LF04LVO / copper disc / black rod / black base/cable/dimmer	€ 935,00										
LF06LVO / white disc / satin rod / white base / black cable/dimmer	€ 905,00										


p. 139



Lederam F1 / standing lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LF12 / black disc / satin rod / black base/cable/dimmer	€ 795,00	240V	mains voltage LED	LED module	1x17W	1700	2700	> 80	A+		included (memory last step)
LF13 / gold disc / black rod / black base/cable/dimmer	€ 825,00										
LF14 / copper disc / black rod / black base/cable/dimmer	€ 825,00										
LF15 / white disc / gold rod / white base/cable/dimmer	€ 795,00	(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)		(included (memory last step))
LF16 / white disc / satin rod / white base/cable/dimmer	€ 795,00										

p. 140




Lederam F2 / standing lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LF22 / black discs / satin rods / black base/cable/dimmer	€ 1.040,00	240V	mains voltage LED	LED module	2x17W 34W	3400	2700	> 80	A+		included (memory last step)
LF23 / gold discs / black rods / black base/cable/dimmer	€ 1.100,00										
LF24 / copper discs / black rods / black base/cable/dimmer	€ 1.100,00										
LF25 / white discs / gold rods / white base/cable/dimmer	€ 1.040,00	(110V available with on/off)	(mains voltage LED)	(LED module)	(2x14W 28W)	(3080)	(2700)	(80)	(A+)		(included (memory last step))
LF26 / white discs / satin rods / white base/cable/dimmer	€ 1.040,00										



p. 142




Lederam F3 / standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LF32 / black discs / satin rod / black base/cable/dimmer	€	1.135,00	240V	mains voltage LED	LED module	3x17W 51W	5100	2700	> 80	A+	-	included (memory last step)
LF33 / gold discs / black rod / black base/cable/dimmer	€	1.225,00										
LF34 / copper discs / black rod / black base/cable/dimmer	€	1.225,00										
LF35 / white discs / gold rod / white base/cable/dimmer	€	1.135,00	(110V available with on/off)	(mains voltage LED)	(LED module)	(3x14W 42W)	(4620)	(2700)	(80)	(A+)		(included (memory last step))
LF36 / white discs / satin rod / white base/cable/dimmer	€	1.135,00										

## Sorry Giotto

[ *Finishes* ] // **Hand painting** is chosen for its deliberate textured effect and uniqueness of result. Any irregularities or unevenness in the coating cannot be considered defect, but rather a hallmark of the artisanal crafting process. / **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.


[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 147



Sorry Giotto 1 / table lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
SG1 / blue ring / rough iron base / blue wire / black dimmer	€	785,00	220-240V (EU plug only)	constant current LED 350 mA	interch. LED	4x1W 4W	560	2700	85	D	constant current plug driver (EU plug only)	included (memory 100%)
SG1PL / blue ring / rough iron base / blue wire / black dimmer	€	785,00	110-240V (all other plugs)	constant current LED 350 mA	interch. LED	4x1W 4W	560	2700	85	D	constant current plug driver (all other plugs)*	included (memory last step)


p. 148

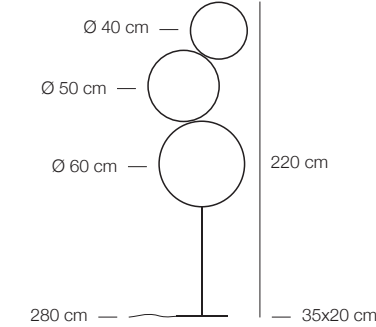

Sorry Giotto 3 / standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
SG3 / blue rings / black base and stem / blue wires / black dimmer	€	3.030,00	110-240V	constant current LED 350 mA	interch. LED	16x1W 16W	2240	2700	85	D	constant current plug driver*	included (memory last step)



p. 151

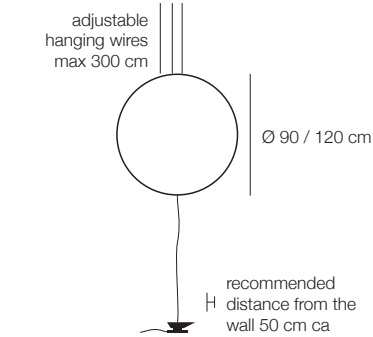

cable: from lamp to dimmer 250 cm /  
from dimmer to plug driver 180 cm


Sorry Giotto 9 / 12 / pendant lamp with floor connection				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
SG9 / ring Ø 90 cm blue / black anvil / blue wires / black dimmer				110-240V	constant current LED 350 mA	interch. LED	12x1W 12W	1680	2700	85	D	constant current plug driver*	included (memory last step)
SG12 / ring Ø 120 cm blue / black anvil / blue wires / black dimmer							15x1W 15W	2100					

## Light Stick

[ *Finishes* ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation. / ( **\*\*** ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.


p. 155



base Ø 9x3,5 cm / H ledge 17 cm

Light Stick CW / wall or ceiling lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LSP4 / nickel rod and base	€	660,00	240V (110V available with not dimmable driver)	constant current LED 350 mA	interch. LED	4x1W 4W	560	2700	85	D	constant current driver	YES IGBT/Triac*
LSP4G / satin gold rod and base	€	760,00										
LSP6 / nickel rod and base	€	825,00				6x1W 6W	840					
LSP6G / satin gold rod and base	€	945,00										
LSP8 / nickel rod and base	€	990,00	240V (110V available on request)	constant current LED 350 mA	interch. LED	8x1W 8W	1120	2700	85	D	constant current driver	YES IGBT/Triac*
LSP8G / satin gold rod and base	€	1.130,00										


p. 156



H ledge 17 cm


Light Stick V / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LSPV6 / nickel vertical rod and base	€	825,00	240V (110V available with not dimmable driver)	constant current LED 350 mA	interch. LED	6x1W 6W	840	2700	85	D	constant current driver	YES IGBT/Triac*
LSPV6G / satin gold vertical rod and base	€	945,00										

p. 157



Light Stick T / table lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LS6 / nickel rod / black base / black cable / black dimmer	€	830,00	110-240V	constant current LED 350 mA	interch. LED	6x1W 6W	840	2700	85	D	constant current plug driver**	included (memory last step)
LS6G / satin gold rod / black base / black cable / black dimmer	€	950,00										

p. 159

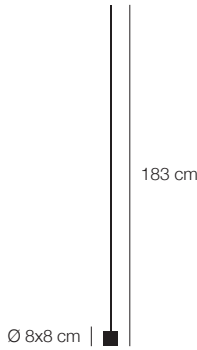


Light Stick F / standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LSF10B / black rod / black base / black wires / black dimmer	€	1.085,00	110-240V	constant current LED 350 mA	interch. LED	10x1W 10W	1400	2700	85	D	constant current plug driver**	included (memory last step)
LSF10 / nickel rod / black base / black wires / black dimmer	€	1.330,00										
LSF10G / satin gold rod / black base / black wires / black dimmer	€	1.510,00										

## Wa Wa

[ *Finishes* ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Copper** is a very malleable and ductile metal, chosen for its high thermal and electrical conductivity, as well as for its typical reddish-orange colour. We use it untreated, therefore it may oxidise with time, forming a green patina. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation. / ( **\*\*** ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.


p. 162



Wa Wa T / table lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
WW / nickel structure, base and sticks / glass lens / blue wires / black dimmer	€	890,00	110-240V	constant current LED 350 mA	interch. LED	3x1W 3W	420	2700	85	D	constant current plug driver**	included (memory last step)



p. 164




base cod. WWF: 20x20 cm  
base cod. WWFBR: 16x16 cm

Wa Wa F / standing lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
WWF / nickel structure, base and sticks / glass lens / black wires / black dimmer	€ 1.815,00	110-240V	constant current LED 350 mA	interch. LED	5x1W 5W	700	2700	85	D	constant current plug driver**	included (memory last step)
WWFBR / brass base and structure / copper sticks / glass lens / black wires / black dimmer	€ 1.915,00										


p. 166



Uau T / table lamp


		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
UAU / nickel structure and base / glass lens / blue wire / black dimmer	€ 595,00	110-240V	constant current LED 350 mA	interch. LED	1x1W	140	2700	85	D	constant current plug driver**	included (memory last step)

p. 167



Uau F / standing lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
UAUF / nickel structure and base / glass lens / blue wire / black dimmer	€ 715,00	110-240V	constant current LED 350 mA	interch. LED	1x1W	140	2700	85	D	constant current plug driver**	included (memory last step)



Atman

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 170




Atman / table lamp						voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer		
AT / oval crystal glass / nickel base / blue wire / black dimmer						€	1.300,00	220-240V (EU plug only)	constant current LED 350 mA	interch. LED	1x1W	140	2700	85	D	constant current plug driver (EU plug only)	included (memory 100%)
ATPL / oval crystal glass / nickel base / blue wire / black dimmer						€	1.300,00	110-240V (all other plugs)	constant current LED 350 mA	interch. LED	1x1W	140	2700	85	D	constant current plug driver (all other plugs)*	included (memory last step)

Giulietta

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website).

p. 177




Giulietta BE T / battery table lamp				battery	source	type	watt	lumen	K	CRI	en. class	battery charger	dimmer		
GBB / black hoop and base / brass rod				€	635,00	Li-ION 3,7V 4100 mA/h	constant voltage LED	LED board	1x2,8W	283	2700	>90	D	input 110/240V output 5V@1,2 A (EU plug only)	included touch
GBBR / vintage brass hoop and base / brass rod				€	735,00										






p. 180

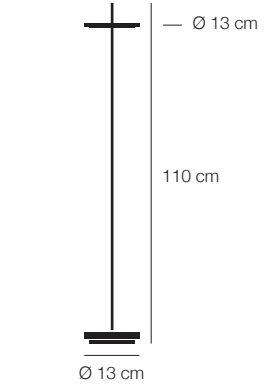


Giulietta BE F / battery standing lamp			battery	source	type	watt	lumen	K	CRI	en. class	battery charger	dimmer
GBFB / black hoop and base / brass rod	€	785,00	Li-iON 3,7V 4100 mA/h	constant voltage LED	LED board	1x2,8W	283	2700	>90	D	input 110/240V output 5V@1,2 A (EU plug only)	included touch
GBFBR / vintage brass hoop and base / brass rod	€	885,00										

p. 182




Giulietta W / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
GPB / black structure / black hoop	€	440,00	110V or 240V	constant voltage LED 5V	LED board	1x2,8W	283	2700	>90	D	constant voltage driver	included touch-less (memory last step)
GPNC / black structure / nickel hoop	€	455,00										

p. 183



Giulietta T / USB table lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
GB / black structure / black hoop / black wire			110-240V	constant voltage LED 5V	LED board	1x2,8W	283	2700	>90	D	USB plug driver (EU plug only)	included touch-less (memory last step)
GNC / black structure / nickel hoop / black wire												

p. 185




Giulietta F / USB standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
GFB / nickel base and rod / black flex / black hoop / black wire	€	885,00	110-240V	constant voltage LED 5V	LED board	1x2,8W	283	2700	>90	D	USB plug driver (EU plug only)	included touch-less (memory last step)
GFNC / nickel base and rod / black flex / nickel hoop / black wire	€	900,00										

Jackie O

[ *Finishes* ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Satin steel** - the standard modular metal bases are composed of a satin steel plate mounted on a white lacquered metal frame and fixed to it by nickel square-head screws. On request we can supply the plate white matt lacquered as the frame.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( \* ) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

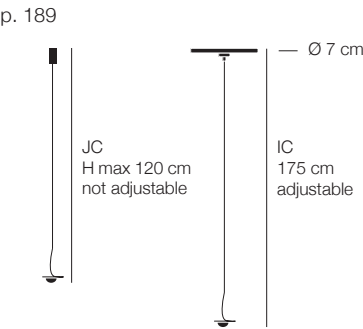


installation hole Jackie O JC Ø 1,25 cm  
installation hole Jackie O IC Ø 5,5 cm

Jackie O JC / IC / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
JOJCLVO / mod. JC / nickel jack connection / blue wire / nickel curl			-	constant voltage 24V LED	LED Jack/interch.	1x1W	143	2700	>80	A++	not included available on request	-
JOICLVO / mod. IC / nickel plate with tensioner / blue wire / nickel curl					interch. LED							



Jackie O Chandelier 6 / 9 / 12 / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming		
JO6QLVO / satin steel base 30x30 cm / blue wires / nickel curls			€	1.835,00	110V or 240V	constant voltage 24V LED	LED Jack/interch.	6x1W 6W	858	2700	>80	A++	constant voltage driver	YES IGBT/Triac*
JO9QLVO / satin steel base 30x30 cm / blue wires / nickel curls			€	2.505,00				9x1W 9W	1287					
JO12QLVO / satin steel base 30x30 cm / blue wires / nickel curls			€	3.080,00				12x1W 12W	1716					

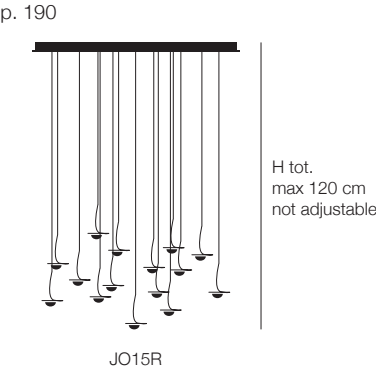


Jackie O Chandelier 15 / 20 / 24 / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming		
JO15QLVO / satin steel base 60x60 cm / blue wires / nickel curls			€	3.775,00	110V or 240V	constant voltage 24V LED	LED Jack/interch.	15x1W 15W	2145	2700	>80	A++	constant voltage driver	YES IGBT/Triac*
JO15RLVO / satin steel base 150x30 cm / blue wires / nickel curls			€	3.775,00				20x1W 20W	2860					
JO20QLVO / satin steel base 60x60 cm / blue wires / nickel curls			€	4.775,00				24x1W 24W	3432					
JO20RLVO / satin steel base 150x30 cm / blue wires / nickel curls			€	4.775,00										
JO24QLVO / satin steel base 60x60 cm / blue wires / nickel curls			€	5.525,00										
JO24RLVO / satin steel base 150x30 cm / blue wires / nickel curls			€	5.525,00										

PostKrisi

[ *Finishes* ] // **Hand painting** is chosen for its deliberate textured effect and uniqueness of result. Any irregularities or unevenness in the coating cannot be considered defect, but rather a hallmark of the artisanal crafting process. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Copper** is a very malleable and ductile metal, chosen for its high thermal and electrical conductivity, as well as for its typical reddish-orange colour. We use it untreated, therefore it may oxidise with time, forming a green patina. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Satin steel** - the standard modular metal bases are composed of a satin steel plate mounted on a white lacquered metal frame and fixed to it by nickel square-head screws. On request we can supply the plate white matt lacquered as the frame.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / ( **\*\*** ) Mains voltage LED modules and COB LED are dimmable using IGBT (trailing edge) dimmers designed specifically for LED sources. Their dimming is extremely delicate: incompatible dimmers may cause irreparable damage to the LED. Some dimmers on the market have a NO button (Normally Open) or are specific connector socket-mounted or recessed. They are generally inserted into junction boxes; their limited thickness facilitates the installer's task and makes the dimmer fit for installation even in shallow boxes. Dimmers with an integrated radio dimmer for both manual (NO button) and wireless control are also available. It is important to note that during adjustment the dimming appears less precise, with some flickering. Furthermore some types of dimmer, even if they have been recommended by the manufacturers themselves, have visible flickering (almost essentially down to a minimum) depending on the mains and on the type of interference present. The problem can be solved by increasing the minimum value setting of the potentiometer on the dimmer. Low voltage DALI or 1...10V versions available on request. / ( **\*\*\*** ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 196




PostKrisi 50 / 51 / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK50LN / PostKrisi 50 / shade 85x35 cm natural / grey braided cable / nickel base	€	690,00	110V (bulb not supplied)-240V	mains voltage LED	E27 bulb	1x8W	900	2700	>80	E	-	YES IGBT/Triac*
PK50LW / PostKrisi 50 / shade 85x35 cm white / grey braided cable / nickel base	€	760,00										
PK50LG / PostKrisi 50 / shade 85x35 cm gold / grey braided cable / nickel base	€	935,00										
PK50LS / PostKrisi 50 / shade 85x35 cm silver / grey braided cable / nickel base	€	935,00										
PK51LN / PostKrisi 51 / shade 115x40 cm natural / grey braided cable / nickel base	€	940,00										
PK51LW / PostKrisi 51 / shade 115x40 cm white / grey braided cable /nickel base	€	1.010,00										
PK51LG / PostKrisi 51 / shade 115x40 cm gold / grey braided cable / nickel base	€	1.185,00										
PK51LS / PostKrisi 51 / shade 115x40 cm silver / grey braided cable / nickel base	€	1.185,00										

weight: PK50 1,5 kg / PK51 2,8 kg

Available on request with LED silver crowned bulb (code LLC31)

p. 196




PostKrisi 52 / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK52LN / natural shade / grey braided cables / nickel base	€	1.240,00	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	YES IGBT/Triac*
PK52LW / white shade / grey braided cables / nickel base	€	1.400,00										
PK52LG / gold shade / grey braided cables / nickel base	€	1.740,00										
PK52LS / silver shade / grey braided cables / nickel base	€	1.740,00										

Available on request with LED silver crowned bulbs (code LLC31)


weight 3 kg

p. 199




PostKrisi 10 Malagolina / table lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
PKM10LN / natural shade / nickel base and structure / blue wire / black dimmer	€	560,00	110-240V	constant current LED 350 mA	interch. LED	2x1W 2W	280	2700	85	D	constant current plug driver***	included (memory last step)
PKM10LW / white shade / nickel base and structure / blue wire / black dimmer	€	580,00										
PKM10LG / gold shade / nickel base and structure / blue wire / black dimmer	€	610,00										
PKM10LS / silver shade / nickel base and structure / blue wire / black dimmer	€	610,00										

p. 200

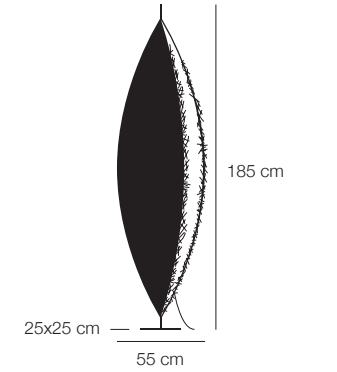

PostKrisi F 100 / standing lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
PKF100W / white shade / nickel base and structure / black wires / black dimmer	€ 2.325,00	110-240V	constant current LED 350 mA	interch. LED	8x1W 8W	1120	2700	85	D	constant current plug driver***	included (memory last step)
PKF100G / gold shade / nickel base and structure / black wires / black dimmer	€ 2.395,00										
PKF100S / silver shade / nickel base and structure / black wires / black dimmer	€ 2.395,00										


p. 202



PostKrisi W 21 / 40 / wall lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PKP21LN / PostKrisi W 21 / shade Ø 21 cm natural / nickel base	€ 495,00	110-240V	constant current LED 350 mA	interch. LED	2x1W 2W	280	2700	85	D	constant current driver	NO av. on request
PKP21LW / PostKrisi W 21 / shade Ø 21 cm white / nickel base	€ 515,00										
PKP21LG / PostKrisi W 21 / shade Ø 21 cm gold / nickel base	€ 540,00										
PKP21LS / PostKrisi W 21 / shade Ø 21 cm silver / nickel base	€ 540,00										
PKP40LW / PostKrisi W 40 / shade Ø 40 cm white / nickel base	€ 700,00										
PKP40LG / PostKrisi W 40/ shade Ø 40 cm gold / nickel base	€ 730,00										
PKP40LS / PostKrisi W 40 / shade Ø 40 cm silver / nickel base	€ 730,00										


Ø 21 cm: rod H 22 cm  
Ø 40 cm: rod H 60 cm

p. 203



PostKrisi CW 70 / ceiling or wall lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PKCW7LVOG / gold shade	€ 1.345,00	240V (available 110V DALI dimmable)	constant current LED 450 mA	COB LED	1x15W	2187	2700	80	D	constant current LED driver	YES Triac
PKCW7LVOS / silver shade	€ 1.345,00										


p. 207



PostKrisi 49 / pendant lamp		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK494LWG / shade Ø 40 cm white/gold / white braided cable / white base	€ 665,00	110V (bulb not supplied)-240V	mains voltage LED	E27 bulb	1x8W	900	2700	>80	E	-	YES IGBT/Triac*
PK494LWS / shade Ø 40 cm white/silver / white braided cable / white base	€ 665,00										
PK496LWG / shade Ø 60 cm white/gold / white braided cable / white base	€ 825,00										
PK496LWS / shade Ø 60 cm white/silver / white braided cable / white base	€ 825,00										

Available on request with LED silver crowned bulb (code LLC31)

p. 207




PostKrisi 49 / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK498LWG / shade Ø 80 cm white/gold / white braided cable / white base	€	1.140,00	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	YES IGBT/Triac*
PK498LWS / shade Ø 80 cm white/silver / white braided cable / white base	€	1.140,00										
PK4910LWG / shade Ø 100 cm white/gold / white braided cable / white base	€	1.540,00										
PK4910LWS / shade Ø 100 cm white/silver / white braided cable / white base	€	1.540,00										

Available on request with LED silver crowned bulbs (code LLC31)


weight: Ø 80 cm 2,8 kg / Ø 100 cm 3 kg

p. 209




PostKrisi T 61 / table lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
PK61LN / natural shades / black base / brass rod / black cable and dimmer	€	950,00	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	included (memory last step)
PK61LNNC / natural shades / nickel rod and base / black cable and dimmer	€	950,00										
PK61LW / white shades / black base / brass rod / black cable and dimmer	€	970,00										
PK61LWNC / white shades / nickel rod and base / black cable and dimmer	€	970,00										

p. 210

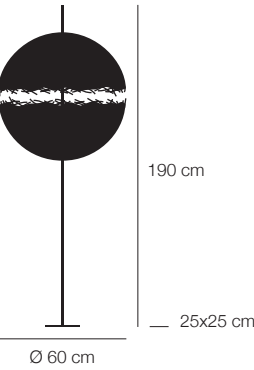


PostKrisi F 64 / standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
PK64LN / natural shades / black base / brass rod / black cable and dimmer	€	1.160,00	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	included (memory last step)
PK64LNNC / natural shades / nickel rod and base / black cable and dimmer	€	1.160,00										
PK64LW / white shades / black base / brass rod / black cable and dimmer	€	1.180,00										
PK64LWNC / white shades / nickel rod and base / black cable and dimmer	€	1.180,00										

p. 212




PostKrisi 65 / pendant lamp					voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming		
PK65LN / shades Ø 40 cm natural / brass structure / black cable and base					€	800,00	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	YES IGBT/Triac*
PK65LNNC / shades Ø 40 cm natural / nickel structure and base / black cable					€	800,00										
PK65LW / shades Ø 40 cm white / brass structure / black cable and base					€	820,00										
PK65LWNC / shades Ø 40 cm white / nickel structure and base / black cable					€	820,00										

H 200 cm / H rod 63 cm / weight 2,5 kg




H 210 cm / H rod 83 cm / weight 3,5 kg

PostKrisi 66 / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK66LN / shades Ø 60 cm natural / brass structure / black cable and base	€	1.100,00	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	YES IGBT/Triac*
PK66LNNC / shades Ø 60 cm natural / nickel structure and base / black cable	€	1.100,00										
PK66LW / shades Ø 60 cm white / brass structure / black cable and base	€	1.120,00										
PK66LWNC / shades Ø 60 cm white / nickel structure and base / black cable	€	1.120,00										



H 220 cm / H rod 100 cm / weight 5 kg

PostKrisi 67 / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK67LN / shades Ø 80 cm natural / brass structure / black cable and base	€	2.020,00	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	YES IGBT/Triac*
PK67LNNC / shades Ø 80 cm natural / nickel structure and base / black cable	€	2.020,00										
PK67LW / shades Ø 80 cm white / brass structure / black cable and base	€	2.040,00										
PK67LWNC / shades Ø 80 cm white / nickel structure and base / black cable	€	2.040,00										

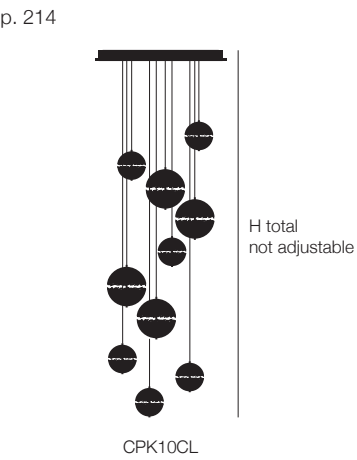

PostKrisi Chandelier / pendant lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
CPK3QL / satin base 30x30 cm / 3x PK14 / H 180 cm				€	1.095,00	240V (110V available with not dimmable driver)	extra-low-voltage 12V DC LED	G4 bulb	2700	80	G	low voltage driver	YES Triac*
CPK5QL / satin base 30x30 cm / 5x PK14 / H 180 cm				€	1.825,00								
CPK7CL / satin base Ø 40 cm / 7x PK14 / H 180 cm				€	2.555,00								
CPK7QL / satin base 60x60 cm / 7x PK14 / H 180 cm				€	2.555,00								
CPK7RL / satin base 90x30 cm / 3x PK20 and 4x PK14 / H 180 cm				€	2.705,00								
CPK10CL / satin base Ø 78 cm / 4x PK20 and 6x PK14 / H 300 cm				€	3.850,00								

PK14 = PostKrisi sphere Ø 14 cm natural with jack

PK20 = PostKrisi sphere Ø 20 cm natural with jack


Fil de Fer

[ *Finishes* ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[ *Cables* ] // **( s )** suspension cable. / **( el )** electrical cable.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website).


p. 218



weight: Ø 50 8 kg / Ø 70 10 kg / Ø 100 16 kg

Fil de Fer / pendant lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
F5SL / Ø 50 cm aluminium / steel cable <sup>(s)</sup> / grey braided cable <sup>(el)</sup> / nickel base	€	1.450,00		240V (110V available with not dimmable driver)	extra-low-voltage 12V DC LED	G4 bulb	12x1W 12W	900	2700	80	G	electronic 12V DC low voltage	YES Triac
F5SLG / Ø 50 cm matt gold anodized / steel cable <sup>(s)</sup> / gold braided cable <sup>(el)</sup> / gold-plated base	€	1.690,00					18x1W 18W	1350					
F7SL / Ø 70 cm aluminium / steel cable <sup>(s)</sup> / grey braided cable <sup>(el)</sup> / nickel base	€	1.850,00					24x1W 24W	1800					
F7SLG / Ø 70 cm matt gold anodized / steel cable <sup>(s)</sup> / gold braided cable <sup>(el)</sup> / gold-plated base	€	2.210,00											
F10SL / Ø 100 cm aluminium / steel cable <sup>(s)</sup> / grey braided cable <sup>(el)</sup> / nickel base	€	2.445,00											
F10SLG / Ø 100 cm matt gold anodized / steel cable <sup>(s)</sup> / gold braided cable <sup>(el)</sup> / gold-plated base	€	2.975,00											

p. 221




mod. A / 120x50x H 35 cm / weight 10 kg  
mod. E / 200x80x H 50 cm / weight 14 kg  
mod. F / 240x140x H 50 cm / weight 21 kg  
cables 170 cm to be cut to size

Fil de Fer Nuvola / pendant lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
FNVAL / mod. A / aluminium / steel cables <sup>(s)</sup> / grey braided cable <sup>(el)</sup> / nickel base	€	2.755,00		110V* or 240V	extra-low-voltage 12V DC LED	G4 bulb	24x1W 24W	1800	2700	80	G	electronic 12V DC low voltage	YES Triac
FNVEL / mod. E / aluminium / steel cables <sup>(s)</sup> / grey braided cable <sup>(el)</sup> / nickel base	€	4.065,00					36x1W 36W	2700					
FNVFL / mod. F / aluminium / steel cables <sup>(s)</sup> / grey braided cable <sup>(el)</sup> / nickel base	€	5.0850,00					44x1W 44W	3300					

\* mod. A 110V available with not dimmable driver  
Further dimensions and gold finish available on request.


p. 225



Fil de Fer F / floor lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
F3L / Ø 30 cm aluminium / grey braided cable / black dimmer	€	1.080,00		110-240V	extra-low-voltage 12V DC LED	G4 bulb	8x1W 8W	600	2700	80	G	low voltage plug driver	included (memory last step)
F3LG / Ø 30 cm gold / gold braided cable / black dimmer	€	1.190,00					10x1W 10W	750					
F5L / Ø 50 cm aluminium / grey braided cable / black dimmer	€	1.450,00					15x1W 15W	1125					
F5LG / Ø 50 cm gold / gold braided cable / black dimmer	€	1.690,00					20x1W 20W	1500					
F7L / Ø 70 cm aluminium / grey braided cable / black dimmer	€	1.850,00											
F7LG / Ø 70 cm gold / gold braided cable / black dimmer	€	2.210,00											
F10L / Ø 100 cm aluminium / grey braided cable / black dimmer	€	2.445,00											
F10LG / Ø 100 cm gold / gold braided cable / black dimmer	€	2.975,00											

12V cable: 170 cm / plug cable: 180 cm

p. 227




Sweet Light Chandelier / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
CSL3QL / 3x Sweet Light Ø 10 cm / satin base 30x30 cm / H 180 cm	€	855,00	240V (110V available with not dimmable driver)	extra-low-voltage 12V DC LED	G4 bulb	3x1W 3W	225	2700	80	G	electronic 12V DC low voltage	YES Triac
CSL5QL / 5x Sweet Light Ø 10 cm / satin base 30x30 cm / H 180 cm	€	1.425,00				5x1W 5W	375					
CSL7CL / 7x Sweet Light Ø 10 cm / satin base Ø 40 cm / H 180 cm	€	1.995,00				7x1W 7W	525					
CSL7QL / 7x Sweet Light Ø 10 cm / satin base 60x60 cm / H 180 cm	€	1.995,00				10x1W 10W	750					
CSL10CL / 10x Sweet Light Ø 10 cm / satin base Ø 78 cm / H 180 cm	€	2.850,00				15x1W 15W	1125					
CSL15QL / 15x Sweet Light Ø 10 cm / satin base 60x60 cm / H 300 cm	€	4.275,00				20x1W 20W	1500					
CSL20CL / 20x Sweet Light Ø 10 cm / satin base Ø 78 cm / H 300 cm	€	5.700,00				35x1W 35W	2625					
CSL35CL / 35x Sweet Light Ø 10 cm / satin base Ø 78 cm / H 400 cm	€	9.975,00										

Standard version with aluminium Sweet Light spheres.

For further models see also PostKrisi Chandelier page 48.


p. 228




Sweet Light T / table lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
SLL / Ø 10 cm aluminium / blue wire	€	275,00	110V-240V	extra low voltage 12V DC LED	G4 bulb	1x1W	75	2700	80	G	low voltage plug driver	included touch (on the sphere)
SLLBR / Ø 10 cm brass / blue wire	€	280,00										
SLLS / Ø 10 cm silver / blue wire	€	320,00										

cable: 250 cm

p. 231



Uomo della Luce S / table lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
USL / rough iron structure / sphere Ø 10 cm aluminium / black dimmer / black wires	€	705,00	110V-240V	extra low voltage 12V DC LED	G4 bulb	1x1,5W	150	2700	85	A+	low voltage plug driver	included (memory last step)






Lucenera

[ *Finishes* ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Carbon and fiberglass tubes**. The production of the tubes is partially craftmade. Any imperfection in the texture is a peculiarity of the product and sign of craftsmanship. The quality of the tubes is guaranteed by using LED bulbs only, preferably with the max wattage included in our standard products.


[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer.

p. 235




Lucenera 504 / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
L504L / black tube and base / metal braided cable / nickel details	€	500,00	110V (bulb not supplied)-240V	mains voltage LED	GU10 bulb	1x5,5W	375	3000	>90	G	-	YES IGBT/Triac*
L504LW / white tube and base / metal braided cable / nickel details	€	500,00										

p. 236



Lucenera 206 / ceiling lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
L20680L / black tubes/base/flexible pipes / nickel details	€	670,00	110V (bulbs not supplied)-240V	mains voltage LED	GU10 bulb	2x5,5W 11W	750	3000	>90	G	-	YES IGBT/Triac*
L20680LW / white tubes/base/flexible pipes / nickel details	€	670,00										


p. 238-239



Lucenera 502 / 503 / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
L502L / Lucenera 502 / black tube/base/rod / nickel details	€	475,00	110V (bulb not supplied)-240V	mains voltage LED	GU10 bulb	1x5,5W	375	3000	>90	G	-	NO on/off switch included
L502LW / Lucenera 502 / white tube/base/rod / nickel details	€	475,00										
L503L / Lucenera 503 / black tubes/base/rods / nickel details	€	705,00	110V (bulbs not supplied)-240V	mains voltage LED	GU10 bulb	2x5,5W 11W	750	3000	>90	G	-	NO on/off switch included
L503LW / Lucenera 503 / white tubes/base/rods / nickel details	€	705,00										




p. 241



Lucenera 500 / table lamp					voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer	
L500L / black tube/base/stand / nickel details					€	590,00	240V (110V available with on/off - bulb not supplied)	mains voltage LED	1x5,5W	375	3000	>90	G	-	included (memory 0%)
L500LW / white tube/base/stand / nickel details					€	590,00									

p. 243




Lucenera 506 / standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer	
L506L / black tube/base/stand / nickel details			€ 645,00	110V (bulb not supplied)-240V	mains voltage LED	GU10 bulb	1x5,5W	375	3000	>90	G	-	included (memory last step)
L506LW / white tube/base/stand / nickel details			€ 645,00										

## Stchu-Moon

[ *Finishes* ] // **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering. / **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request.


[ *Cables* ] // ( **s** ) suspension cable. / ( **el** ) electrical cable.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / ( **\*\*** ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.




Stchu-Moon 02 230V / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming		
SM24230LS / Ø 40 cm silver (exterior black) / black cable / nickel base			€	645,00	110V (bulb not supplied)-240V	mains voltage LED	E27 bulb	1x8W	900	2700	>80	E	-	YES IGBT/Triac*
SM24230LG / Ø 40 cm gold (exterior black) / black cable / nickel base			€	645,00										
SM24230LC / Ø 40 cm copper (exterior black) / black cable / nickel base			€	645,00										
SM26230LS / Ø 60 cm silver (exterior black) / black cable / nickel base			€	885,00										
SM26230LG / Ø 60 cm gold (exterior black) / black cable / nickel base			€	885,00										
SM26230LC / Ø 60 cm copper (exterior black) / black cable / nickel base			€	885,00										


Available on request with LED silver crowned bulb (code LLC31)




weight: Ø 80 cm 6,5 kg / Ø 100 cm 7,5 kg



weight: Ø 40 cm 2 kg / Ø 60 cm 3,5 kg



weight: Ø 80 cm 6,5 kg / Ø 100 cm 7,5 kg

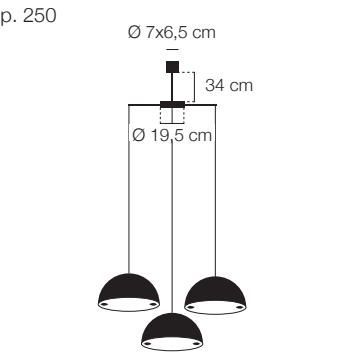

3x Ø 40 cm  
H max 190 cm / tot. Ø 105 cm / weight 13,5 kg  
3x Ø 60 cm  
H max 200 cm / tot. Ø 145 cm / weight 18,5 kg

Stchu-Moon 02 230V / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SM28230LS / Ø 80 cm silver (exterior black) / black cables / nickel base	€	1.320,00	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	YES IGBT/Triac*
SM28230LG / Ø 80 cm gold (exterior black) / black cables / nickel base	€	1.320,00										
SM28230LC / Ø 80 cm copper (exterior black) / black cables / nickel base	€	1.320,00										
SM210230LS / Ø 100 cm silver (exterior black) / black cables / nickel base	€	1.680,00										
SM210230LG / Ø 100 cm gold (exterior black) / black cables / nickel base	€	1.680,00										
SM210230LC / Ø 100 cm copper (exterior black) / black cables / nickel base	€	1.680,00										


Available on request with LED silver crowned bulbs (code LLC31)

Stchu-Moon 02 / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SM24LS / Ø 40 cm silver (exterior black) / steel spoons / black cable and base	€	1.035,00	240V (110V available on request)	24V DC LED board	LED board	2x4W 8W	840	2700	>80	F	electronic 24V DC low voltage	YES Triac
SM24LG / Ø 40 cm gold (exterior black) / steel spoons / black cable and base	€	1.035,00										
SM24LC / Ø 40 cm copper (exterior black) / steel spoons / black cable and base	€	1.035,00										
SM26LS / Ø 60 cm silver (exterior black) / steel spoons / black cable and base	€	1.275,00										
SM26LG / Ø 60 cm gold (exterior black) / steel spoons / black cable and base	€	1.275,00										
SM26LC / Ø 60 cm copper (exterior black) / steel spoons / black cable and base	€	1.275,00										

Stchu-Moon 02 / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SM28LS / Ø 80 cm silver (exterior black) / steel spoons / steel cable <sup>(a)</sup> / black cable <sup>(a)</sup> and base	€	1.645,00	240V (110V available on request)	24V DC LED board	LED board	4x4W 16W	1680	2700	>80	F	electronic 24V DC low voltage	YES Triac
SM28LG / Ø 80 cm gold (exterior black) / steel spoons / steel cable <sup>(a)</sup> / black cable <sup>(a)</sup> and base	€	1.645,00										
SM28LC / Ø 80 cm copper (exterior black) / steel spoons / steel cable <sup>(a)</sup> / black cable <sup>(a)</sup> and base	€	1.645,00										
SM210LS / Ø 100 cm silver (exterior black) / steel spoons / steel cable <sup>(a)</sup> / black cable <sup>(a)</sup> and base	€	2.465,00										
SM210LG / Ø 100 cm gold (exterior black) / steel spoons / steel cable <sup>(a)</sup> / black cable <sup>(a)</sup> and base	€	2.465,00										
SM210LC / Ø 100 cm copper (exterior black) / steel spoons / steel cable <sup>(a)</sup> / black cable <sup>(a)</sup> and base	€	2.465,00										


Stchu-Moon 02 Chandelier / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SM234LS / Ø 40 cm silver (exterior black) / steel spoons / black cables and structure	€	3.055,00	240V (110V available on request 1..10V or push dimm.)	24V DC LED board	LED board	6x4W 24W	2520	2700	>80	F	electronic 24V DC low voltage	YES Triac
SM234LG / Ø 40 cm gold (exterior black) / steel spoons / black cables and structure	€	3.055,00										
SM234LC / Ø 40 cm copper (exterior black) / steel spoons / black cables and structure	€	3.055,00										
SM236LS / Ø 60 cm silver (exterior black) / steel spoons / black cables and structure	€	3.775,00										
SM236LG / Ø 60 cm gold (exterior black) / steel spoons / black cables and structure	€	3.775,00										
SM236LC / Ø 60 cm copper (exterior black) / steel spoons / black cables and structure	€	3.775,00										

p. 253




Stchu-Moon 05 / wall lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SM5LS / silver (exterior white) / steel spoon / white base	€	595,00		240V (110V available on request 1..10V or push dimm.)	24V DC LED board	LED board	1x4W	420	2700	>80	F	electronic 24V DC low voltage	YES Triac
SM5LG / gold (exterior white) / steel spoon / white base	€	595,00											
SM5LC / copper (exterior white) / steel spoon / white base	€	595,00											

p. 254



Stchu-Moon 08 / wall/standing lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
SM88LS / Ø 80 cm silver (exterior grey matt) / nickel light structure / black anvil	€	1.415,00		110-240V	low voltage LED 12V	GU5.3 bulb	1x7,5W	630	3000	90	F	-	included (memory last step)
SM88LG / Ø 80 cm gold (exterior grey matt) / nickel light structure / black anvil	€	1.415,00											
SM88LC / Ø 80 cm copper (exterior grey matt) / nickel light structure / black anvil	€	1.415,00											
SM812LS / Ø 120 cm silver (exterior grey matt) / nickel light structure / black anvil	€	1.685,00											
SM812LG / Ø 120 cm gold (exterior grey matt) / nickel light structure / black anvil	€	1.685,00											
SM812LC / Ø 120 cm copper (exterior grey matt) / nickel light structure / black anvil	€	1.685,00											


p. 255



Stchu-Moon R / recessed lamp for plasterboard ceiling				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SMI14S / Ø 14 cm silver (bulb not included)	€	225,00		-	mains voltage	GU10 bulb not included	-	-	-	-	-	-	-
SMI14G / Ø 14 cm gold (bulb not included)	€	225,00											
SMI14C / Ø 14 cm copper (bulb not included)	€	225,00											
LS4 / LED bulb	net price	€	15,00	220-240V	mains voltage LED	GU10 bulb	5,5W	375	3000	>90	G	-	YES IGBT/Triac*

installation hole Ø 13 cm / max depth 15 cm


p. 256



Stchu-Moon 01 / floor lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
SM14LS / Ø 40 cm silver (ext. black) / steel spoon / metal braided cable / black dimmer/cable	€	1.005,00	110-240V	24V DC LED board	LED board	1x4W	420	2700	>80	F	low voltage plug driver**	included (memory last tep)
SM14LG / Ø 40 cm gold (ext. black) / steel spoon / metal braided cable / black dimmer/cable	€	1.005,00										
SM14LC / Ø 40 cm copper (ext. black) / steel spoon / metal braided cable / black dimmer/cable	€	1.005,00										
SM16LS / Ø 60 cm silver (ext. black) / steel spoons / metal braided cable / black dimmer/cable	€	1.245,00				2x4W 8W	840					
SM16LG / Ø 60 cm gold (ext. black) / steel spoons / metal braided cable / black dimmer/cable	€	1.245,00										
SM16LC / Ø 60 cm copper (ext. black) / steel spoons / metal braided cable / black dimmer/cable	€	1.245,00										



p. 259

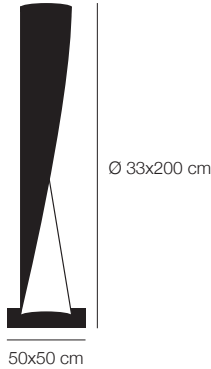


Stchu-Moon 09 / standing lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
SM9LS / silver (rough iron ext.) / steel spoons / metal braided cable / black dimmer/cable	€ 2.865,00	110-240V	24V DC LED board (1x candle included)	LED board	2x4W 8W	840	2700	>80	F	low voltage plug driver**	included (memory last step)
SM9LG / gold (rough iron ext.) / steel spoons / metal braided cable / black dimmer/cable	€ 2.865,00										
SM9LC / copper (rough iron ext.) / steel spoons / metal braided cable / black dimmer/cable	€ 2.865,00										

Macchina della Luce

[ *Finishes* ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer.




Macchina della Luce mod. A / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MALG / discs Ø 80-50-30-18 cm / gold / nickel base / brass rods	€ 2.205,00	220-240V	24V DC LED board	LED board	7x6W 42W	4410	2700	80	F	electronic 24V DC low voltage	YES Triac
MALS / discs Ø 80-50-30-18 cm / silver / nickel base / aluminium rods	€ 2.205,00										
MALC / discs Ø 80-50-30-18 cm / copper / nickel base / brass rods	€ 2.205,00										

MALG110V / discs Ø 80-50-30-18 cm / gold / nickel base / brass rods	€ 2.205,00	110V	24V DC LED board	LED board	7x6W 42W	4410	2700	80	F	electronic 24V DC low voltage	YES Triac
MALS110V / discs Ø 80-50-30-18 cm / silver / nickel base / aluminium rods	€ 2.205,00										
MALC110V / discs Ø 80-50-30-18 cm / copper / nickel base / brass rods	€ 2.205,00										

weight 10 kg / rods 300 cm available on request




Macchina della Luce mod. B / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MBLG / discs Ø 80-18 cm / gold / nickel base / brass rods	€ 1.465,00	220-240V	24V DC LED board	LED board	2x6W 12W	1260	2700	80	F	electronic 24V DC low voltage	YES Triac
MBLS / discs Ø 80-18 cm / silver / nickel base / aluminium rods	€ 1.465,00										
MBLC / discs Ø 80-18 cm / copper / nickel base / brass rods	€ 1.465,00										

MBLG110V / discs Ø 80-18 cm / gold / nickel base / brass rods	€ 1.465,00	110V	24V DC LED board	LED board	2x6W 12W	1260	2700	80	F	electronic 24V DC low voltage	YES Triac
MBLS110V / discs Ø 80-18 cm / silver / nickel base / aluminium rods	€ 1.465,00										
MBLC110V / discs Ø 80-18 cm / copper / nickel base / brass rods	€ 1.465,00										


weight 6 kg / rods 300 cm available on request

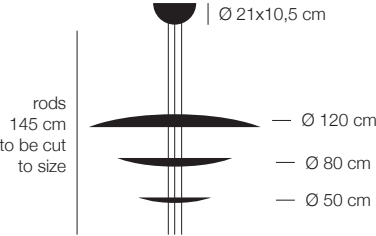

Macchina della Luce mod. C / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MCLG / discs Ø 120 (flying leaf)-80-50 cm / gold / nickel base / brass rods	€	2.930,00	220-240V	24V DC LED board	LED board	7x6W 42W	4410	2700	80	F	electronic 24V DC low voltage	YES Triac
MCLS / discs Ø 120 (flying leaf)-80-50 cm / silver / nickel base / aluminium rods	€	2.930,00										
MCLC / discs Ø 120 (flying leaf)-80-50 cm / copper / nickel base / brass rods	€	2.930,00										
MCLG110V / discs Ø 120 (flying leaf)-80-50 cm / gold / nickel base / brass rods	€	2.930,00	110V	24V DC LED board	LED board	7x6W 42W	4410	2700	80	F	electronic 24V DC low voltage	YES Triac
MCLS110V / discs Ø 120 (flying leaf)-80-50 cm / silver / nickel base / aluminium rods	€	2.930,00										
MCLC110V / discs Ø 120 (flying leaf)-80-50 cm / copper / nickel base / brass rods	€	2.930,00										


weight 13 kg / rods 300 cm available on request

p. 253

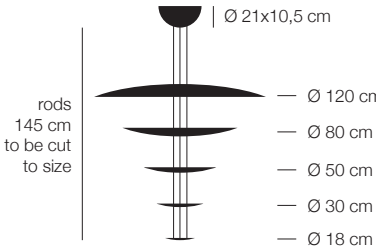


Macchina della Luce mod. D / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MDLG / discs Ø 120 (flying leaf)-80-50-30-18 cm / gold / nickel base / brass rods	€	3.360,00	220-240V	24V DC LED board	LED board	10x6W 60W	6300	2700	80	F	electronic 24V DC low voltage	YES Triac
MDLS / discs Ø 120 (flying leaf)-80-50-30-18 cm / silver / nickel base / aluminium rods	€	3.360,00										
MDLC / discs Ø 120 (flying leaf)-80-50-30-18 cm / copper / nickel base / brass rods	€	3.360,00										
MDLG110V / discs Ø 120 (flying leaf)-80-50-30-18 cm / gold / nickel base / brass rods	€	3.360,00	110V	24V DC LED board	LED board	8x6W 48W	5040	2700	80	F	electronic 24V DC low voltage	YES Triac
MDLS110V / discs Ø 120 (flying leaf)-80-50-30-18 cm / silver / nickel base / aluminium rods	€	3.360,00										
MDLC110V / discs Ø 120 (flying leaf)-80-50-30-18 cm / copper / nickel base / brass rods	€	3.360,00										

weight 16 kg / rods 300 cm available on request



Macchina della Luce mod. E / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MELG / discs Ø 50-30-18 cm / gold / nickel base / brass rods	€	1.435,00	220-240V	24V DC LED board	LED board	4x6W 24W	2520	2700	80	F	electronic 24V DC low voltage	YES Triac
MELS / discs Ø 50-30-18 cm / silver / nickel base / aluminium rods	€	1.435,00										
MELC / discs Ø 50-30-18 cm / copper / nickel base / brass rods	€	1.435,00										
MELG110V / discs Ø 50-30-18 cm / gold / nickel base / brass rods	€	1.435,00	110V	24V DC LED board	LED board	4x6W 24W	2520	2700	80	F	electronic 24V DC low voltage	YES Triac
MELS110V / discs Ø 50-30-18 cm / silver / nickel base / aluminium rods	€	1.435,00										
MELC110V / discs Ø 50-30-18 cm / copper / nickel base / brass rods	€	1.435,00										

weight 6 kg / rods 300 cm available on request

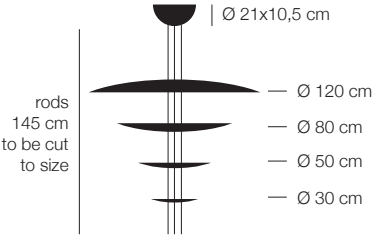


Macchina della Luce mod. F / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MFLG / discs Ø 120 (flying leaf)-80-50-30 cm / gold / nickel base / brass rods	€	3.210,00	220-240V	24V DC LED board	LED board	9x6W 54W	5670	2700	80	F	electronic 24V DC low voltage	YES Triac
MFLS / discs Ø 120 (flying leaf)-80-50-30 cm / silver / nickel base / aluminium rods	€	3.210,00										
MFLC / discs Ø 120 (flying leaf)-80-50-30 cm / copper / nickel base / brass rods	€	3.210,00										
MFLG110V / discs Ø 120 (flying leaf)-80-50-30 cm / gold / nickel base / brass rods	€	3.210,00	110V	24V DC LED board	LED board	8x6W 48W	5040	2700	80	F	electronic 24V DC low voltage	YES Triac
MFLS110V / discs Ø 120 (flying leaf)-80-50-30 cm / silver / nickel base / aluminium rods	€	3.210,00										
MFLC110V / discs Ø 120 (flying leaf)-80-50-30 cm / copper / nickel base / brass rods	€	3.210,00										

weight 15 kg / rods 300 cm available on request



p. 266

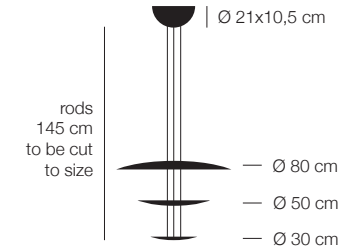

Macchina della Luce mod. I / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MILG / discs Ø 80-50-30 cm / gold / nickel base / brass rods	€	1.890,00	220-240V	24V DC LED board	LED board	5x6W 30W	3150	2700	80	F	electronic 24V DC low voltage	YES Triac
MILS / discs Ø 80-50-30 cm / silver / nickel base / aluminium rods	€	1.890,00										
MILC / discs Ø 80-50-30 cm / copper / nickel base / brass rods	€	1.890,00										
MILG110V / discs Ø 80-50-30 cm / gold / nickel base / brass rods	€	1.890,00	110V	24V DC LED board	LED board	5x6W 30W	3150	2700	80	F	electronic 24V DC low voltage	YES Triac
MILS110V / discs Ø 80-50-30 cm / silver / nickel base / aluminium rods	€	1.890,00										
MILC110V / discs Ø 80-50-30 cm / copper / nickel base / brass rods	€	1.890,00										


weight 8 kg / rods 300 cm available on request

## Luci d’Oro

[ *Finishes* ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp’s output please refer to our bim files (see website). / ( **\*** ) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / ( **\*\*** ) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.


p. 271



Malagola 27 / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
ML27LG / gold / black base and cable	€	620,00	110V-240V	constant current LED	COB LED	1x2W	300	2700	≥80	F	constant current driver	NO
ML27LS / silver / black base and cable	€	620,00										
ML27LC / copper / black base and cable	€	620,00										

weight 0,9 kg

p. 271




Malagola 55 / pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
ML55LG / gold / black-cloth cable / black base	€	790,00	110V (bulb not supplied)-240V	mains voltage LED	E27 bulb	1x8W	900	2700	>80	E	-	YES IGBT/Triac*
ML55LS / silver / black-cloth cable / black base	€	790,00										
ML55LC / copper / black-cloth cable / black base	€	790,00										

weight 1,7 kg






p. 271



Malagola 110 / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
ML110LG / gold / black-cloth cable / black base	€ 1.715,00	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	YES IGBT/Triac*
ML110LS / silver / black-cloth cable / black base	€ 1.715,00										
ML110LC / copper / black-cloth cable / black base	€ 1.715,00										

weight 4,5 kg

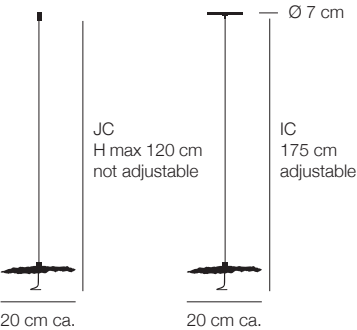


Gold Moon JC / IC / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
GMJCLVO / mod. JC / nickel jack connection / black wire / black/gold wrap shade / copper curl	€ 250,00	-	constant voltage 24V LED	LED Jack/interch.	1x1W	143	2700	>80	A++	not included available on request	-
GMICLVO / mod. IC / nickel plate with tensioner / black wire / black/gold wrap shade / copper curl	€ 240,00			interch. LED							

installation hole mod. JC Ø 1,3 cm  
installation hole mod. IC Ø 5,5 cm

p. 272

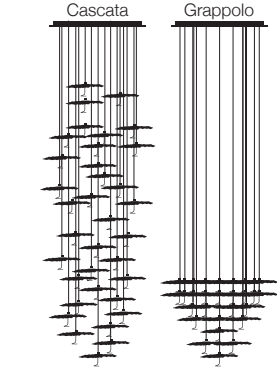


Gold Moon Chandelier / pendant lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
CGM20CLVO / satin steel base / 20x black/gold wrap shades / copper curls / nickel jack / black wires	€ 5.700,00	110V or 240V	constant voltage 24V LED	LED Jack/interch.	20x1W 20W	2860	2700	>80	A++	constant voltage driver	YES IGBT/Triac**
CGM25CLVO / satin steel base / 25x black/gold wrap shades / copper curls / nickel jack / black wires	€ 7.125,00				25x1W 25W	3575					
CGM35CLVO / satin steel base / 35x black/gold wrap shades / copper curls / nickel jack / black wires	€ 9.975,00				35x1W 35W	5005					

base Ø 78 cm / shades Ø 20 cm ca. /  
H max 300 cm not adjustable

p. 278




DiscO / ceiling lamp

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
DSOLG / gold / polished aluminium and nickel details	€ 825,00	240V (available 110V DALI dimmable)	constant current LED	COB LED	1x15W	2187	2700	80	D	constant current LED driver	YES Triac
DSOLS / silver / polished aluminium and nickel details	€ 825,00										
DSOLC / copper / polished aluminium and nickel details	€ 825,00										
DSOLW / white / polished aluminium and nickel details	€ 795,00										






p. 279



Luna W / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LNW30G / gold / copper stick / brass flex	€	460,00	110V or 240V	constant current LED 350 mA	interch. LED	2x1W 2W	280	2700	85	D	constant current driver	NO
LNW30S / silver / copper stick / brass flex	€	460,00										
LNW30C / copper / copper stick / brass flex	€	460,00										


p. 281



Luna Piena 80 / 120 / ceiling or wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LP80LG / Luna Piena 80 / gold flying leaf (exterior grey matt) / brass flex / white base	€	1.035,00	220-240V (110V available on request)	low voltage LED 12V	GU5.3	1x7,5W	630	3000	90	F	low voltage driver	YES IGBT/Triac
LP80LS / Luna Piena 80 / silver flying leaf (exterior grey matt) / nickel flex / white base	€	1.035,00										
LP80LC / Luna Piena 80 / copper flying leaf (exterior grey matt) / brass flex / white base	€	1.035,00										
LP120LG / Luna Piena 120 / gold flying leaf (exterior grey matt) / brass flex / white base	€	1.425,00										
LP120LS / Luna Piena 120 / silver flying leaf (exterior grey matt) / nickel flex / white base	€	1.425,00										
LP120LC / Luna Piena 120 / copper flying leaf (exterior grey matt) / brass flex / white base	€	1.425,00										

Ø 80: flex Ø 1,3x50 cm  
Ø 120: flex Ø 1,5x80 cm


p. 282



Full Moon 50 / 80 / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
FM50W / Full Moon 50 / white / nickel sticks / white base	€	865,00	240V (110V available not dimmable)	constant current LED 350 mA	interch. LED	5x1W 5W	700	2700	85	D	constant current driver	YES IGBT/Triac**
FM50G / Full Moon 50 / gold / nickel sticks / white base	€	920,00										
FM50S / Full Moon 50 / silver / nickel sticks / white base	€	920,00										
FM80W / Full Moon 80 / white / nickel sticks / white base	€	1.270,00	240V (110V available 1 ... 10V or push dimmable)									
FM80G / Full Moon 80 / gold / nickel sticks / white base	€	1.355,00										
FM80S / Full Moon 80 / silver / nickel sticks / white base	€	1.355,00										


base Ø 14x3 cm / ledge 15 cm

p. 283




Francesca 80 / 120 / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
FR8LWG / Francesca 80 / white/gold back side / white base	€	935,00	110V (bulbs not supplied)-240V	mains voltage LED	G9 bulb	4x3W 12W	960	2700	>80	G	-	YES IGBT/Triac*
FR8LG / Francesca 80 / gold / gold base	€	935,00										
FR8LS / Francesca 80 / silver / silver base	€	935,00										
FR8LC / Francesca 80 / copper / copper base	€	935,00										
FR12LWG / Francesca 120 / white/gold back side / white base	€	1.325,00										
FR12LG / Francesca 120 / gold / gold base	€	1.325,00										
FR12LS / Francesca 120 / silver / silver base	€	1.325,00										
FR12LC / Francesca 120 / copper / copper base	€	1.325,00										

p. 284




Luce d'Oro T / table lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LOLG / gold / brass flex / rough iron base / black switch and cable	€	620,00	110V or 240V	low voltage LED 12V	GU4 bulb	1x3,5W	200	2700	80	G	-	NO on/off switch included
LOLS / silver / nickel flex / rough iron base / black switch and cable	€	620,00										
LOLC / copper / brass flex / rough iron base / black switch and cable	€	620,00										

p. 285




Luce d'Oro F / standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
LOFLG / gold / brass flex / rough iron base and structure / black cable and dimmer	€	930,00	110-240V	low voltage LED 12V	GU5.3 bulb	1x7,5W	630	3000	90	F	-	included (memory last step)
LOFLS / silver / nickel flex / rough iron base and structure / black cable and dimmer	€	930,00										
LOFLC / copper / brass flex / rough iron base and structure / black cable and dimmer	€	930,00										

p. 286




Luna / table candle holder			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
LNG / gold / rough iron base	€	165,00	-	candle (included)	-	-	-	-	-	-	-	-
LNS / silver / rough iron base	€	165,00										
LNC / copper / rough iron base	€	165,00										

p. 287




Gemma / table candle holder			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
GMG / gold / rough iron structure	€	285,00	-	candle (included)	-	-	-	-	-	-	-	-
GMS / disc silver / rough iron structure	€	285,00										
GMC / copper / rough iron structure	€	285,00										

p. 288



Colonna / standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
CNLG / gold interior (flying leaf) / rough iron coloumn / black dimmer	€	2.695,00	110V (bulb not supplied)-240V	mains voltage LED	E27 bulb	1x17W	1900	2700	>80	E	-	included (memory last step)
CNLS / silver interior (flying leaf) / rough iron coloumn / black dimmer	€	2.695,00										
CNLC / copper interior (flying leaf) / rough iron coloumn / black dimmer	€	2.695,00										

p. 291-292



Pepita 65  
internal Ø 5,9 cm / external Ø 8,9 cm /  
depth 5,6 cm / installation hole Ø 6,5 cm

Pepita 102  
internal Ø 9,7 cm / external Ø 11 cm /  
depth 5,5 cm / installation hole Ø 10,2 cm

Pepita 65 / recessed lamp for plasterboard ceiling			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
P65 / white / gold / transparent cover	€	350,00	-	constant voltage 24V LED	interch. LED board	1x1W	160	2700	90	A++	not included available on request	-


Pepita 102 / recessed lamp for plasterboard ceiling/wall												
P102 / white / gold	€	295,00	-	constant voltage 24V LED	interch. LED board	1x1W	160	2700	90	A++	not included available on request	-

## Turciù

[ *Finishes* ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer.

p. 297




flex Ø 0,85 cm:  
7x75 cm / 10x100 cm / 9x125 cm / 10x150 cm  
weight 20 kg

Turciù 36 / ceiling/pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
TRS36LNC / nickel flex (nickel lampholder) / satin nickel base	€	3.265,00	110V (bulbs not supplied)-240V	mains voltage LED	E14 bulb	36x4W 144W	12960	2700	>80	F	-	YES IGBT/Triac*
TRS36LBR / brass flex (nickel lampholder) / satin nickel base	€	3.365,00										




p. 297



flex Ø 0,85 cm: 5x100 cm / 16x150 cm  
weight 11 kg


Turciù 21 / ceiling/pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
TRS21LNC / nickel flex (nickel lampholder) / satin nickel base	€	2.285,00	110V (bulbs not supplied)-240V	mains voltage LED	E14 bulb	21x4W 84W	7560	2700	>80	F	-	YES IGBT/Triac*
TRS21LBR / brass flex (nickel lampholder) / satin nickel base	€	2.385,00										

p. 297



flex Ø 0,85 cm: 16x150 cm  
weight 9 kg


Turciù 16 / ceiling/pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
TRS16LNC / nickel flex (nickel lampholder) / satin nickel base	€	1.915,00	110V (bulbs not supplied)-240V	mains voltage LED	E14 bulb	16x4W 64W	5760	2700	>80	F	-	YES IGBT/Triac*
TRS16LBR / brass flex (nickel lampholder) / satin nickel base	€	2.015,00										



flex Ø 0,85 cm: 9x150 cm  
weight 5 kg

Turciù 9 / ceiling/pendant lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
TRS9LNC / nickel flex (nickel lampholder) / satin nickel base			110V (bulbs not supplied)-240V	mains voltage LED	E14 bulb	9x4W 36W	3240	2700	>80	F	-	YES IGBT/Triac*
TRS9LBR / brass flex (nickel lampholder) / satin nickel base												

p. 298



flex Ø 0,85 cm: 9x75 cm

Turciù 9 / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
TR9LNC / nickel flex (nickel lampholder) / satin nickel base	€	920,00	110V (bulbs not supplied)-240V	mains voltage LED	E14 bulb	9x4W 36W	3240	2700	>80	F	-	YES IGBT/Triac*
TR9LBR / brass flex (nickel lampholder) / satin nickel base	€	980,00										

p. 299



Turciù 5 / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
TR5LNC / nickel flex (nickel lampholder) / nickel base	€	490,00	110V (bulbs not supplied)-240V	mains voltage LED	E14 bulb	5x4W 20W	1800	2700	>80	F	-	YES IGBT/Triac*
TR5LBR / brass flex (nickel lampholder) / nickel base	€	520,00										

flex Ø 0,85 cm; 5x75 cm

p. 300




Turciù 3 / 2 / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming	
TR3LNC / Turciù 3 / nickel flex (nickel lampholder) / nickel base			€ 360,00	110V (bulbs not supplied)-240V	mains voltage LED	E14 bulb	3x4W 12W	1080	2700	>80	F	-	YES IGBT/Triac*
TR3LBR / Turciù 3 / brass flex (nickel lampholder) / nickel base			€ 365,00										



TR2LNC / Turciù 2 /nickel flex (nickel lampholder) / nickel base			€ 295,00	110V (bulbs not supplied)-240V	mains voltage LED	E14 bulb	2x4W 8W	720	2700	>80	F	-	YES IGBT/Triac*
TR2LBR / Turciù 2 / brass flex (nickel lampholder) / nickel base			€ 300,00										

flex Ø 1,3 cm: 3/2x50 cm  
on request available with flex Ø 0,85 cm


p. 301



Bonsai / table lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer	
BNLBR / LED / brass flex (nickel lampholder) / iron base / black cable and dimmer				€ 1.550,00	240V (110V available on request / bulbs not supplied)	mains voltage LED	E14 bulb	12x2,7W 32,4W	1800	2700	>80	G	-	included

flex Ø 0,6 cm: 12x60 cm

p. 302




Sottovento 15 / standing lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer	
SVLNC / nickel flex (nickel lampholder) / iron structure / black cable and dimmer			€ 4.105,00	240V (110V available on request / bulbs not supplied)	mains voltage LED	E14 bulb	15x4W 60W	5400	2700	>80	F	-	included
SVLBR / brass flex (nickel lampholder) / iron structure / black cable and dimmer			€ 4.205,00										

base 40x40 cm / flex Ø 1,2: 15x150 cm



p. 303

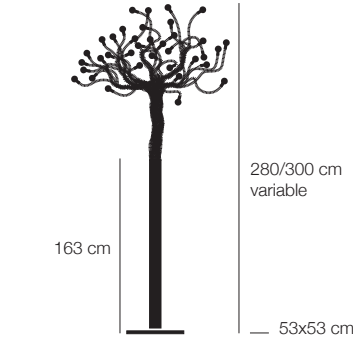


Albero della Luce / standing lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
ALLBR / brass flex (nickel lampholder) / iron structure / black cable				€ 7.430,00	240V (110V available on request / bulbs not supplied)	mains voltage LED	E14 bulb	36x4W/144W	12960	2700	80	F	-	wireless (remote control included)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						

flex Ø 0,85 cm; 36x150 cm

## Medousê (outdoor)


[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) Mains voltage LED modules and COB LED are dimmable using IGBT (trailing edge) dimmers designed specifically for LED sources. Their dimming is extremely delicate: incompatible dimmers may cause irreparable damage to the LED. Some dimmers on the market have a NO button (Normally Open) or are specific connector socket-mounted or recessed. They are generally inserted into junction boxes; their limited thickness facilitates the installer's task and makes the dimmer fit for installation even in shallow boxes. Dimmers with an integrated radio dimmer for both manual (NO button) and wireless control are also available. It is important to note that during adjustment the dimming appears less precise, with some flickering. Furthermore some types of dimmer, even if they have been recommended by the manufacturers themselves, have visible flickering (almost essentially down to a minimum) depending on the mains and on the type of interference present. The problem can be solved by increasing the minimum value setting of the potentiometer on the dimmer. / ( **\*\*** ) IP specifics: LED module IP64; IP average rate of the lamp 44.

p. 309



Medousê W / wall lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MD3P / green glass / brass rod	€	755,00	110V or 240V	mains voltage LED**	LED module IP64	1x17W	1650	2700	80	A+	-	YES*
MD3PTR / transparent glass / brass rod	€	755,00										

p. 312



Medousê F / floor lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming	
MD3 / Ø 30 cm / green glass / aluminium details / plug cable (code MDCV) not included			€ 1.285,00	110V or 240V	mains voltage LED**	LED module IP64	1x29W	2580	2700	80	A+	-	YES*
MD3TR / Ø 30 cm / transparent glass / brass details / plug cable (code MDCV) not included			€ 1.285,00										
MD5 / Ø 50 cm / green glass / aluminium details / plug cable (code MDCV) not included			€ 2.005,00										
MD5TR / Ø 50 cm / transparent glass / brass details / plug cable (code MDCV) not included			€ 2.005,00										

weight: Ø 30 cm 15 kg / Ø 50 cm 31 kg


More  
(outdoor)

[ *Finishes* ] // **Zinc plated metal** is the material of the stems of the More collection. They are suitable for outdoor installation, but they are not immersion proof.

[ *Cables* ] // **( s )** suspension cable. / **( el )** electrical cable.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / **( \* )** IP specifics: lampholder IP65 (not protected against immersion); wires and connectors IP68; drivers IP67; IP average rate of the lamp 44.

p. 316




**More** / pendant lamp / driver and accessories not incl. (see pages 112-117)

MRS / transparent glass / steel cable <sup>(s)</sup> / grey-transparent cable <sup>(el)</sup>	€	375,00	-	extra-low-voltage 12V DC LED bulb	G4 bulb (IP65 lampholder)*	1x1W	75	2700	80	G	not included available on request	-
MRSA / amber glass / steel cable <sup>(s)</sup> / grey-transparent cable <sup>(el)</sup>	€	405,00										
MRSGR / green glass / steel cable <sup>(s)</sup> / grey-transparent cable <sup>(el)</sup>	€	405,00										

weight 1 kg


p. 319



**More 0** / floor lamp / driver and accessories not incl. (see pages 112-117)

MR0 / transparent glass / grey-transparent cable 300 cm	€	350,00	-	extra-low-voltage 12V DC LED bulb	G4 bulb (IP65 lampholder)*	1x1W	75	2700	80	G	not included available on request	-
MR0A / amber glass / grey-transparent cable 300 cm	€	380,00										
MR0GR / green glass / grey-transparent cable 300 cm	€	380,00										

p. 320



**More F** / standing lamp / driver and accessories not incl. (see pages 112-117)


MR70 / H 70 cm / metal stem / transparent glass / grey-transparent cable 210 cm	€	470,00	-	extra-low-voltage 12V DC LED bulb	G4 bulb (IP65 lampholder)*	1x1W	75	2700	80	G	not included available on request	-
MR70A / H 70 cm / metal stem / amber glass / grey-transparent cable 210 cm	€	500,00										
MR70GR / H 70 cm / metal stem / green glass / grey-transparent cable 210 cm	€	500,00										
MR100 / H 100 cm / metal stem / transparent glass / grey-transparent cable 170 cm	€	480,00										
MR100A / H 100 cm / metal stem / amber glass / grey-transparent cable 170 cm	€	510,00										
MR100GR / H 100 cm / metal stem / green glass / grey-transparent cable 170 cm	€	510,00										
MR130 / H 130 cm / metal stem / transparent glass / grey-transparent cable 150 cm	€	490,00										
MR130A / H 130 cm / metal stem / amber glass / grey-transparent cable 150 cm	€	520,00										
MR130GR / H 130 cm / metal stem / green glass / grey-transparent cable 150 cm	€	520,00										

Sypha  
(outdoor)

[ *Finishes* ] // **Stems** - the stems of the Sypha collection are made of brass (Syphaduepassi) or black coloured iron (Syphasera and Syphasfera).

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / **(\*)** IP specifics: lampholder IP65 (not protected against immersion); wires and connectors IP68; drivers IP67; IP average rate of the lamp 44.


p. 325

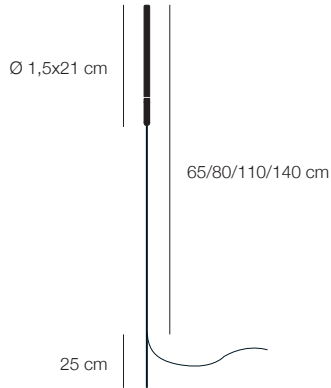

**Syphasera** / standing lamp / driver and accessories not incl. (see pages 112-117)

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SYS65 / H 65 cm / black stem / brass details / opaline glass / grey-transparent cable 255 cm	€	260,00	-	extra-low-voltage 12V DC LED bulb	1x1W	75	2700	80	G	not included available on request	-
SYS80 / H 80 cm / black stem / brass details / opaline glass / grey-transparent cable 240 cm	€	265,00									
SYS110 / H 110 cm / black stem / brass details / opaline glass / grey-transparent cable 210 cm	€	275,00									
SYS140 / H 140 cm / black stem / brass details / opaline glass / grey-transparent cable 180 cm	€	285,00									


p. 328

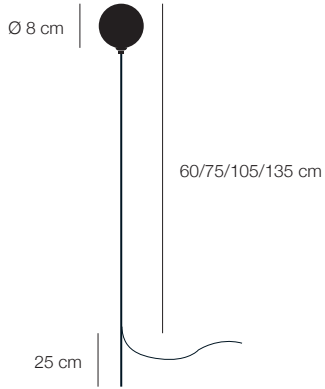

**Syphasfera** / standing lamp / driver and accessories not incl. (see pages 112-117)

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SYF60 / H 60 cm / black stem / brass details / transparent glass / grey-transparent cable 255 cm	€	275,00	-	extra-low-voltage 12V DC LED bulb	1x1W	75	2700	80	G	not included available on request	-
SYF60I / H 60 cm / black stem / brass details / irreg. transp. glass / grey-transparent cable 255 cm	€	275,00									
SYF75 / H 75 cm / black stem / brass details / transparent glass / grey-transparent cable 240 cm	€	280,00									
SYF75I / H 75 cm / black stem / brass details / irreg. transp. glass / grey-transparent cable 240 cm	€	280,00									
SYF105 / H 105 cm / black stem / brass details / transparent glass / grey-transparent cable 210 cm	€	290,00									
SYF105I / H 105 cm / black stem / brass details / irreg. transp. glass / grey-transparent cable 210 cm	€	290,00									
SYF135 / H 135 cm / black stem / brass details / transparent glass / grey-transparent cable 180 cm	€	300,00									
SYF135I / H 135 cm / black stem / brass details / irreg. transp. glass / grey-transparent cable 180 cm	€	300,00									

p. 331



**Syphaduepassi** / standing lamp / driver and accessories not incl. (see pages 112-117)

		voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SYD45 / H 45 cm / brass stem and details / grey-transparent cable 225 cm	€	245,00	-	extra-low-voltage 12V DC LED bulb	1x1W	75	2700	80	G	not included available on request	-
SYD75 / H 75 cm / brass stem and details / grey-transparent cable 195 cm	€	245,00									




Fil de Fer  
(outdoor)

[ *Finishes* ] // **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[ *Cables* ] // **( s )** suspension cable. / **( el )** electrical cable.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / **( \* )** The drivers for the dimmable version of our outdoor products are larger than their not-dimmable standards. They are available on request with custom sized bases and boxes (see our website for further references). / **( \*\* )** IP specifics: lampholder IP65 (not protected against immersion); wires and connectors IP68; drivers IP67; IP average rate of the lamp 44.


p. 335



Fil de Fer / outdoor pendant lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
F5SIPL / Ø 50 cm / aluminium / steel cables <sup>(s)</sup> / metal braided cable <sup>(el)</sup> / chrome base				110V or 240V	extra-low-voltage 12V DC LED bulb	G4 bulbs (IP65 lampholder)**	8x1W 8W	600	2700	80	G	electronic 12V DC IP67	NO
F7SIPL / Ø 70 cm / aluminium / steel cables <sup>(s)</sup> / metal braided cable <sup>(el)</sup> / chrome base							16x1W 16W	1200					
F10SIPL / Ø 100 cm / aluminium / steel cables <sup>(s)</sup> / metal braided cable <sup>(el)</sup> / chrome base							20x1W 20W	1500					

weight: Ø 50 8,5 kg / Ø 70 13 kg / Ø 100 18 kg


p. 336



Fil de Fer F / outdoor floor lamp			voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
F5IPL / Ø 50 cm / aluminium / metal braided cable / black box and plug cable	€	1.550,00	220-240V (110V available on request)	extra-low-voltage 12V DC LED bulb	G4 bulbs (IP65 lampholder)**	8x1W 8W	600	2700	80	G	electronic 12V DC IP67	NO
F7IPL / Ø 70 cm / aluminium / metal braided cable / black box and plug cable	€	2.235,00				16x1W 16W	1200					
F10IPL / Ø 100 cm / aluminium / metal braided cable / black box and plug cable	€	3.145,00				20x1W 20W	1500					

cable 12V 450 cm / cable 230V (EU or CH) 200 cm

p. 341

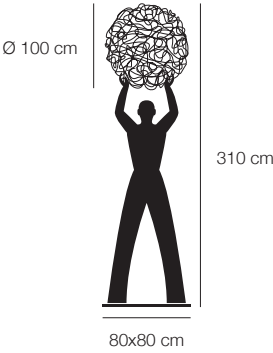

Uomo della Luce XXL / outdoor standing lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
UIPL / rough iron structure / aluminium sphere / black cable, box and plug cable				220-240V (110V av. on request)	extra-low-voltage 12V DC LED bulb	G4 bulbs (IP65 lampholder)**	20x1W 20W	1500	2700	80	G	electronic 12V DC IP67	NO


cable 12V 350 cm / cable 230V (EU or CH) 200 cm

Limited edition

[ *Finishes* ] // **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. It may oxidise, therefore regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website).

p. 345




Trenta / battery table lamp / plug driver 110-240V with EU plug				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer	
TRENTA / glass bulb / brass-coated cover / 1x1W LED / on/off included				€ 1.550,00	Li-iON 3,7V 1180 mA/h	constant voltage	LED	1x1W	100	2700	80	A+	input 110/240V output 5V@1,2 A (EU plug only)	NO on/off switch included

Other Smiths

[ *Finishes* ] // **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website).

p. 351



Alchemie T / table lamp				voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer	
AHT / brass disc / alabaster diffuser / Medea limestone base				€ 2.955,00	110-240V	constant voltage 24V LED	low voltage LED strip	12W	1300	3000	>95	G	constant voltage plug driver	NO on/off switch incl.

TECHNICAL INFORMATION






## MAINS VOLTAGE LED

The LED modules and COB LED we supply in the Lederam (exception made for Lederam F0) and Medousê collection can be connected directly to the mains voltage because they do not require any driver (other than the one already mounted on the module). Compared to traditional light sources, mains voltage LED modules are more sensitive to any interference in the electricity mains, including voltage fluctuation and harmonic distortion, because they have a faster response to changes in voltage. This means that consequently to this variations occasional flickering or functioning anomaly may occur, but since not depending on the product, they cannot be considered a flaw or defect. Further than by problems on the line voltage, fluctuations and harmonics may be produced by variable power loads, as those caused by many types of motors and electronic devices. In case of anomalies we suggest to check the electrical system to apply protective modules reducing overvoltage at the connection terminals of electronic components. By means of this modules / filters, any residual voltage is then reduced to an appropriate protective level in relation to the discharge current.


### Dimming

Mains voltage LED modules and COB LED are dimmable using IGBT (trailing edge) dimmers designed specifically for LED sources. Their dimming is extremely delicate: incompatible dimmers may cause irreparable damage to the LED. Some dimmers on the market have a NO button (Normally Open button) or they are specific connector socket-mounted or recessed. They are generally inserted into junction boxes; their limited thickness facilitates the installer's task and makes the dimmer fit for installation even in shallow boxes. Dimmers with an integrated radio dimmer for both manual (NO button) and wireless control are also available. It is important to note that during adjustment (for instance with a cord dimmer) the dimming appears less precise, with some flickering. Furthermore some types of dimmer, even if they have been recommended by the manufacturers themselves, have visible flickering (almost essentially down to a minimum) depending on the mains and on the type of interference present. The problem can be solved by increasing the minimum value setting of the potentiometer on the dimmer.

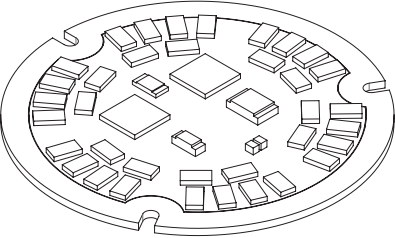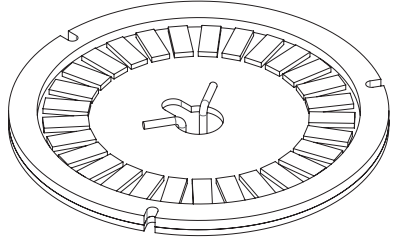
LED module	LED module (Medousê)	COB LED
		
17W 28W	17W 29W	15W 30W




### NO (Normally Open) Button

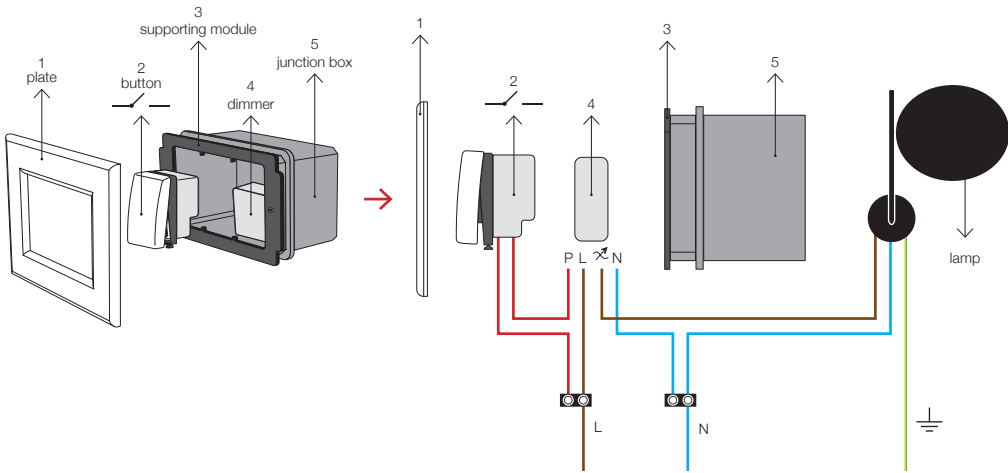

### Socket-mounted or recessed

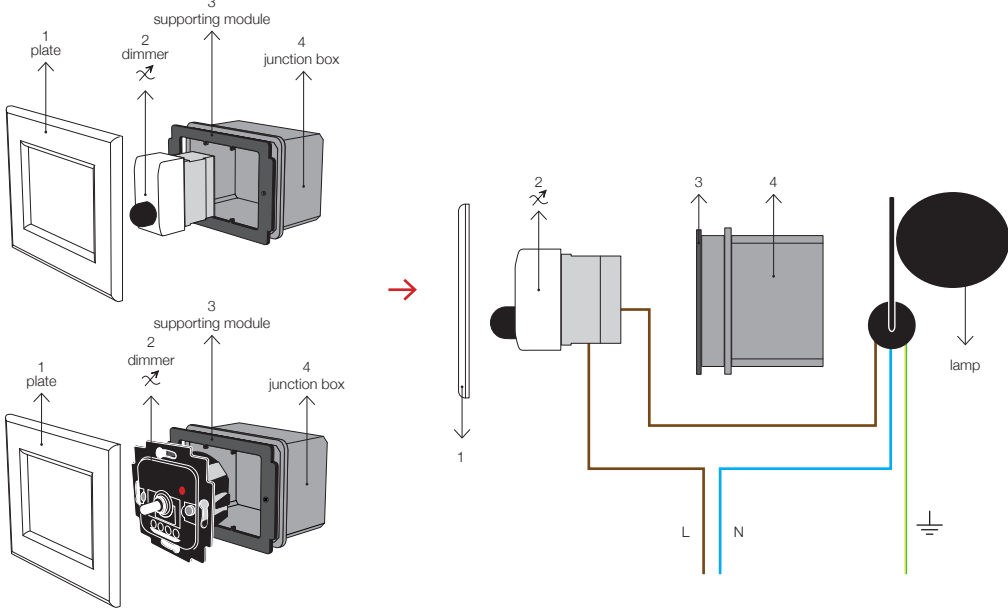



### Wireless

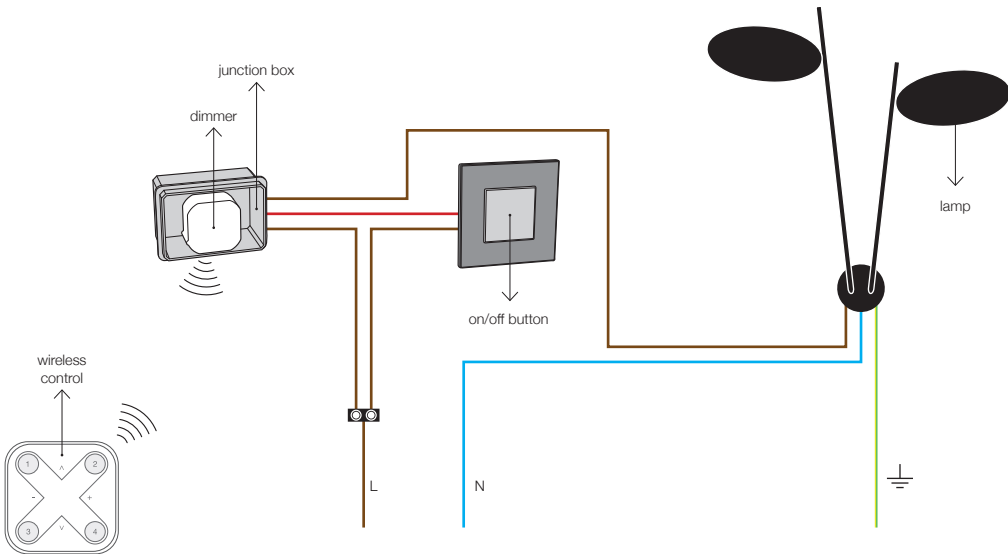




LEDERAM: COLOUR COMBINATIONS AND DETAILS

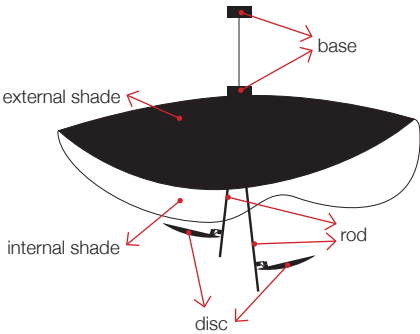
Lederam Manta S1 / S2 / CWS1 / C150 / C180	code	shade		rods	discs	base
		external	internal			
	3	black	gold	black	gold	black
	4	black	copper	black	copper	black
	5	white	white	gold	white	white
	6	white	gold	satin	white	white
	8	white	white	satin	white	white
	10*	white	white	white	white	white
* Finish not available for model Lederam Manta S2						

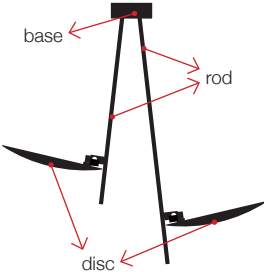Lederam C2 / C3 / W2	code	discs	rods	base
	2	black	satin	black
	3	gold	black	black
	4	copper	black	black
	5	white	gold	white
	6	white	satin	white

Lederam W	code	disc 1		disc 2		base
		external	internal	internal	external	
	1	black	copper	copper	black	black
	2	black	gold	gold	black	black
	3	gold	gold	gold	white	white
	4	copper	copper	copper	white	white
	5	white	gold	gold	white	white
	6	white	copper	copper	white	white




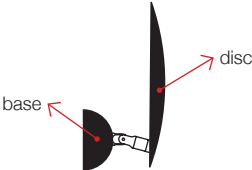


Lederam W1	code	disc		joint	base
		external	internal		
	1	black	black	nickel	black
	3	gold	black	nickel	black
	4	copper	black	nickel	black
	6	white	white	nickel	white

Lederam WF	code	disc		base
		external	external	
	1	black	black	black
	3	gold	white	white
	4	copper	white	white
	6	white	white	white

Lederam F1 / F2 / F3	code	discs	rods	base	cable	dimmer
	2	black	satin	black	black	black
	3	gold	black	black	black	black
	4	copper	black	black	black	black
	5	white	gold	white	white	white
	6	white	satin	white	white	white
	12*	brass	black	black	black	black
* Finish available for model Lederam F0 only						

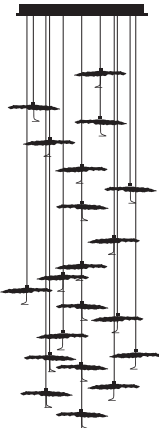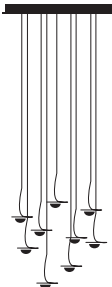

CHANDELIER

GOLD MOON	JACKIE O	POSTKRISI	SWEET LIGHT
<p>Gold Moon Chandelier is supplied with single pendants with black wires, irregular black/gold shade dia. 20 cm ca. and copper curl directing the beam of light upwards to the shade. Each shade is handmade, therefore the dimensions can slightly change from pendant to pendant.</p>	<p>Jackie O Chandelier is supplied with single pendant with blue cable and nickel curl with lens, to define the beam of light of each pendant.</p>	<p>PostKrisi Chandelier is supplied with natural fibreglass spheres with a diameter of 14 or 20 cm. On request it is also available with spheres in different colours or lined with gold/silver/copper coloured leaf.</p>	<p>Sweet Light Chandelier is supplied with aluminium spheres with a diameter of 10 cm. On request it is also available with brass or silver coloured spheres.</p>
			
Bases			

The Chandeliers are supplied with satin steel bases in different dimensions.



square

30x30x5 cm / 60x60x5 cm / 90x90x5 cm



rectangular

150x30x5 cm / 150x60x5 cm / 90x30x5 cm








round

Ø 40 cm / Ø 78 cm

The bases of the Chandeliers are modular and very easy to install.

The satin finish steel plates are anchored to the white painted metal frame by means of suspension chains that facilitate both installation and maintenance. They are then secured in place with square head screws; the nickel cube that covers the screw remains exposed (see drawing). The steel plate is available on request white painted.

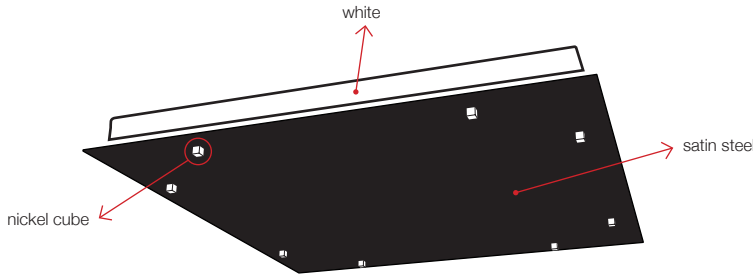

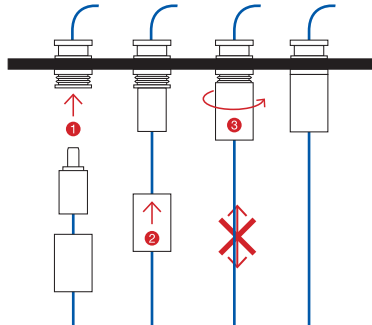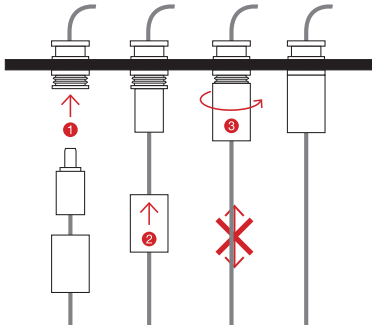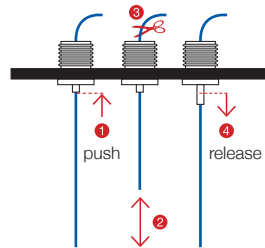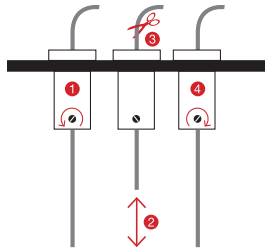
GOLD MOON	JACKIE O	POSTKRISI	SWEET LIGHT
Standard Jack Mounting (NOT ADJUSTABLE HEIGHT)			
Each pendant is mounted onto the base by means of a connection jack that fits in and locks in place in a simple motion. The base can therefore be shipped separately from the pendants, facilitating both the shipping and installation itself.			
<p>STANDARD</p> <p>The standard maximum height of the codified Jackie O Chandeliers is 120 cm (obtained from H of base 5 cm + max pendant height of 115 cm). Starting from the maximum height, the cable lengths descend 7 times by about 5 cm.</p>  <p>ON REQUEST</p> <p>By choosing the maximum cable length (up to max 300 cm – dimensions rounded up to the nearest 5 cm) and downsizing while retaining the proportions of the standard codes, a custom made composition can be produced. Any further customisation entails a bespoke design requiring a quotation (customized production).</p> <p>NB Each capillary is manually bent. A tolerance of about 1 to 2 cm on the given cables lengths must be considered as acceptable</p>		<p>STANDARD</p> <p>The standard maximum heights of the codified PostKrisi and Sweet Light Chandeliers are 180/300/400 cm (obtained from H of base 5 cm + max pendant height of 175/295/395 cm).</p>  <p>ON REQUEST</p> <p>By choosing the maximum cable length (up to max 300 cm – dimensions rounded up to the nearest 5 cm) and downsizing while retaining the proportions of the standard codes, a custom made composition can be produced. Any further customisation entails a bespoke design requiring a quotation (customized production).</p>	
On Request (ADJUSTABLE HEIGHT)			
<p>TENSIONER</p> <p>The version with a tensioner is available in those cases where the length of the cable requires adjustment during installation. The tensioner is supplied disassembled. Once you have placed the cable at the desired height, it must be cut and reconnected to the inside of the base (this operation helps preventing voltage drops and tangled cables inside the base).</p> 		<p>CABLE LOCKING</p> <p>The version with cable locking is available in those cases where the length of the cable requires adjustment during installation or in case of custom chandelier with bigger PostKrisi spheres (dia. 40 or 60 cm). The cable locking is supplied disassembled. Once you have placed the cable at the desired height, it must be cut and reconnected to the inside of the base (this operation helps preventing voltage drops and tangled ables inside the base).</p> 	
Custom			

On request we can supply customized designs with different base dimensions, a different number of pendants or with a tensioner instead of a jack connection. The PostKrisi and Sweet Light pendants are interchangeable on the bases, therefore we can also supply mixed Chandeliers.




MACCHINA DELLA LUCE LED BOARDS

12W




2 x  
LED board 6W 24V DC

18W



3 x  
LED board 6W 24V DC

24W




4 x  
LED board 6W 24V DC

Mod. A		
	Ø 80 cm	
	18W β	Ø 50 cm
	12W α	Ø 30 cm
	12W α	Ø 18 cm
42W		4410 lumen
Mod. B		
	Ø 80 cm	
	Ø 18 cm	
	12W α	
	12W	1260 lumen
Mod. C		
	Ø 120 cm	
	24W γ	Ø 80 cm
	18W β	Ø 50 cm
	42W	4410 lumen
Mod. D*		
	Ø 120 cm	
	18W β	Ø 80 cm
	18W β	Ø 50 cm
	12W α	Ø 30 cm
60W		6300 lumen
* 110V version available with 4x α 12W / tot. 48W max		
** 110V version available with 2x β 18W / 1x α 12W / tot. 48W max		
Mod. E		
	Ø 50 cm	
	12W α	Ø 30 cm
	12W α	Ø 18 cm
	24W	2520 lumen
Mod. F**		
	Ø 120 cm	
	24W γ	Ø 80 cm
	18W β	Ø 50 cm
	12W α	Ø 30 cm
54W		5670 lumen
Mod. I		
	Ø 80 cm	
	18W β	Ø 50 cm
	12W α	Ø 30 cm
	30W	3150 lumen





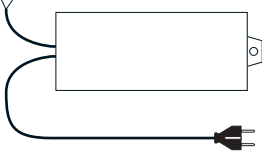
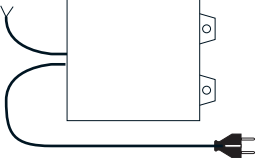


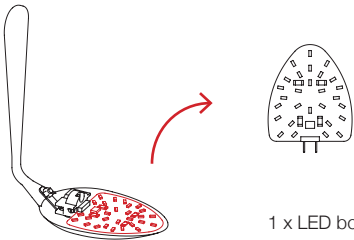STCHU-MOON LED BOARDS





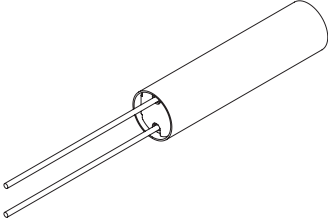
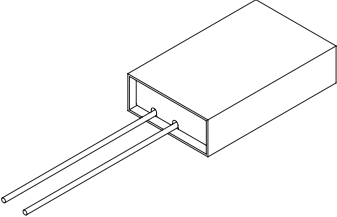


1x 4W / 420 lumen			Stchu-Moon 05	
			Stchu-Moon 01	Ø 40 cm
2x 4W / 840 lumen			Stchu-Moon 01	Ø 60 cm
			Stchu-Moon 09	
			Stchu-Moon 02	Ø 40/60 cm
4x 4W / 1680 lumen			Stchu-Moon 02	Ø 80/100 cm
			Stchu-Moon 02 Chandelier	
6x 4W / 2520 lumen	3x			



OUTDOOR: GEL BOX SYSTEM	
	<b>MB1</b> <b>Mini gel box IP68</b>
	5,3x3,9x2,4 cm
	(max 2 connections - connectors included)
	Price IVA / VAT excl.
	€            30,00
	<b>MB2</b> <b>Mini gel box IP68</b>
	5,2x5,3x2,9 cm
	(max 6 connections - connectors included)
	Price IVA / VAT excl.
	€            30,00
	<b>KP1</b> <b>Extension cord kit</b>
	5 mt
	with mini gel box IP68 for single connection
	(max 1 lamp)
	Price IVA / VAT excl. €            50,00
	<b>ED6</b> <b>Driver 10W 12V DC 220-240V IP67</b>
	7x3,7x2,3 cm / cables 45 cm ca.
	not dimmable
	(max 9 lamps)
	Price IVA / VAT excl. €            75,00
	<b>ED7</b> <b>Driver 30W 12V DC 220-240V IP67</b>
	11x3,7x2,3 cm / cable 12V 45 cm ca. / plug cable 200 cm
	not dimmable
	(max 30 lamps)
	<b>ED7D</b> <b>Driver 30W 12V DC 220-240V IP67</b>
	8x8x3 cm / cables 12V 45 cm ca. / plug cable 200 cm
	Triac dimmable
	(min. 12 max 30 lamps)



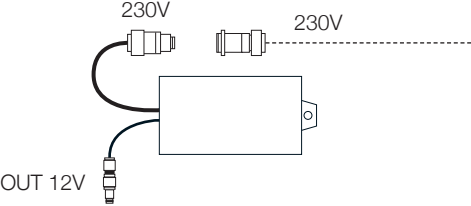



OUTDOOR: QUICK CONNECTORS SYSTEM	
	<b>ED6CR</b> <b>Driver 10W 12V DC 220-240V IP67</b>
	230V and 12V connectors included
	3,7x2,3x7 cm - cables 45 cm ca.
	not dimmable
	(max 9 lamps)
	<b>CRM</b> <b>Quick IP68 multiple connector / 1 IN &amp; 5 OUT 12V</b>
	(max 5 connections)
	Price IVA / VAT excl.
	€            135,00
	<b>CRS</b> <b>Quick IP68 IN single connector</b>
	(max 1 connections)
	Price IVA / VAT excl.
	€            35,00
	<b>KP2</b> <b>Extension cord kit with quick IP68 connectors CRS</b>
	5 mt
	(max 1 lamp)
	Price IVA / VAT excl.
	€            85,00
	<b>FKIPL</b> <b>Kit box driver</b>
	Ø 5x20 cm / cable 12V 45 cm / plug cable 200 cm
	not dimmable (driver ED7)
	standard
	<b>FKIPLD</b> <b>Kit box driver</b>
	16x10x4 cm / cable 12V 45 cm / plug cable 200 cm
	Triac dimmable (driver ED7D)
	available on request





OUTDOOR ACCESSORIES

	MSMP	Supporting modular plate
		for More (MR70/MR100/MR130)
		32x32x32 cm
		(max 3 lamps)
		Price IVA / VAT excl. € 60,00
	MPT	Peg
		for More (MR70/MR100/MR130)
		25 cm
		Price IVA / VAT excl.
		€ 25,00
	MSM	Supporting plate
		for Medousê F
		31x31 cm ca.
		Price IVA / VAT excl.
		€ 65,00
	MDCV	Plug cable 230V standard EU (CH available on request)
		for Medousê F
		350 cm
		Price IVA / VAT excl.
		€ 35,00




MEDOUSÊ INSTALLATION SUGGESTIONS

WARNING

For stability reasons the lamp must be fastened to a solid surface such as a well or basement; in alternative it can be mounted on the modular supporting plate (ref. L / code MSM) available on request. Before installing the lamp, please check the levelling of the soil and make sure that it can support the weight of the fitting.



(Medousê weight Ø 30 cm 15 kg / Ø 50 cm 31 kg)



lamp base with holes for the fastening  
(plugs not included)



Example 1

with basement and supply cable from the side

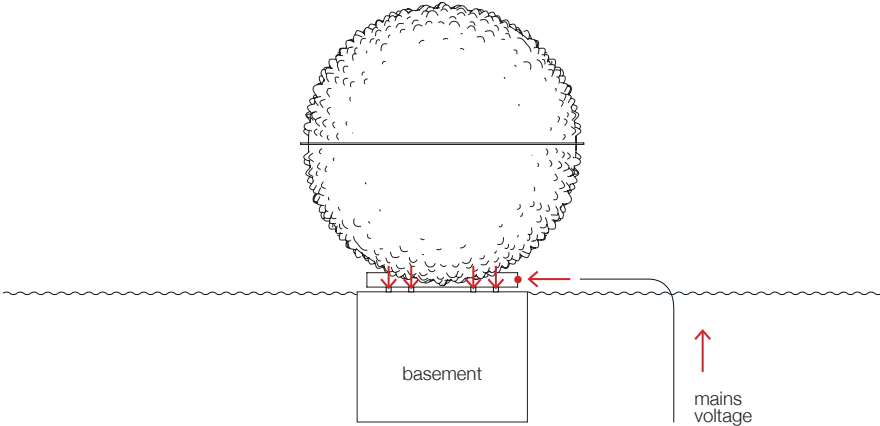



Example 2

with well and supply cable from underneath

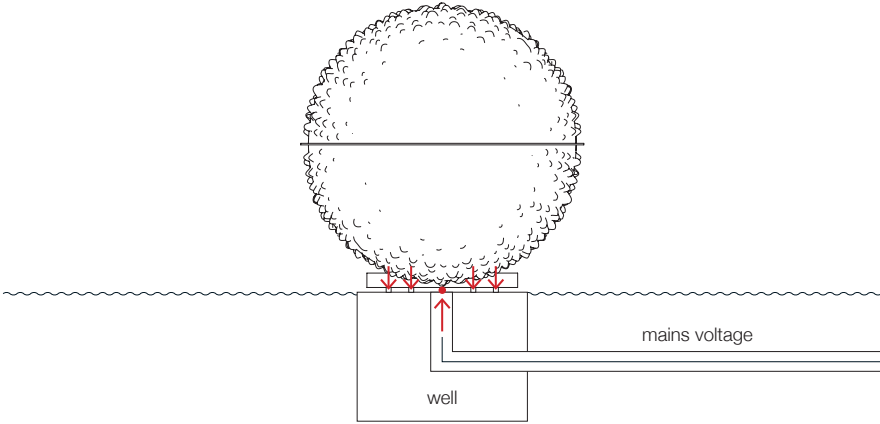

Example 3


with supporting plate 1x code MSM  
with plug cable 230V 1x code MDCV

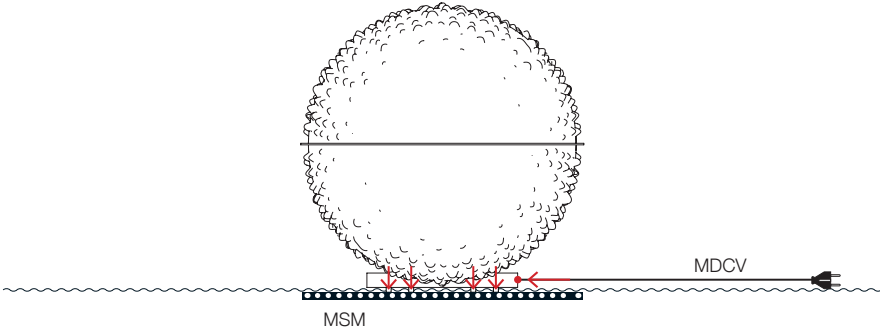




Installation suggestions for Outdoor / GEL BOX system


1	Connection type	For models	Power supply	Access. applied
	GEL BOX system (without well)	Syphasera/Syphasfera/Syphaduepassi/More	code ED6	1x code ED6 1x code MB1 1x code MB2

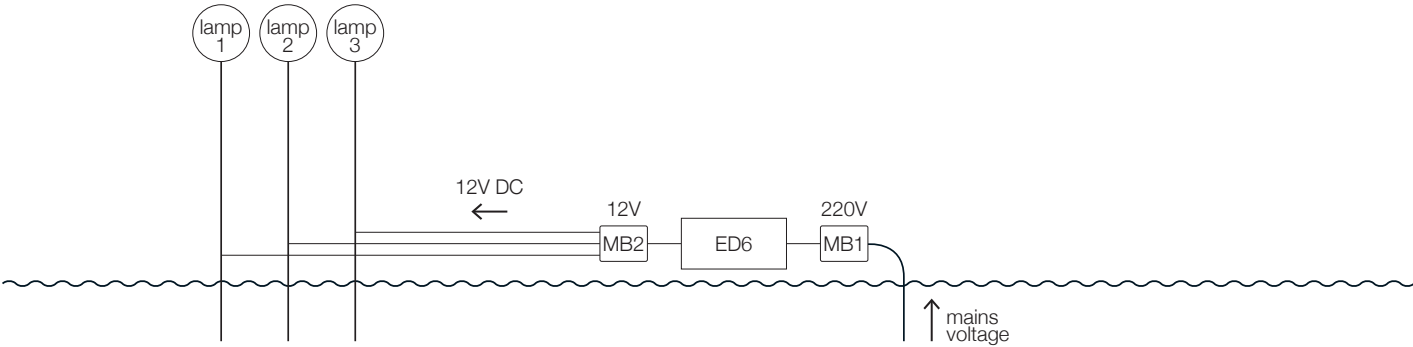

2	Connection type	For models	Power supply	Access. applied
	GEL BOX system (with well)	Syphasera/Syphasfera/Syphaduepassi/More	provided by client	1x code MB2 1x code KP1

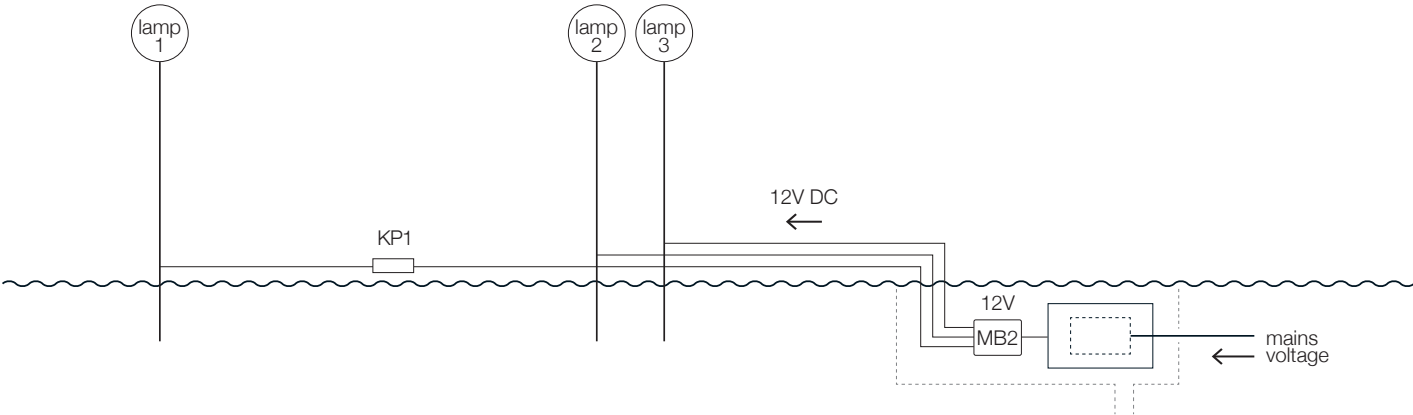

3	Connection type	For models	Power supply	Access. applied
	GEL BOX system (without well)	More (MR70/MR100/MR130)	code ED6	1x code ED6 1x code MB1 1x code MB2 1x code MSMP 3x code MPT*

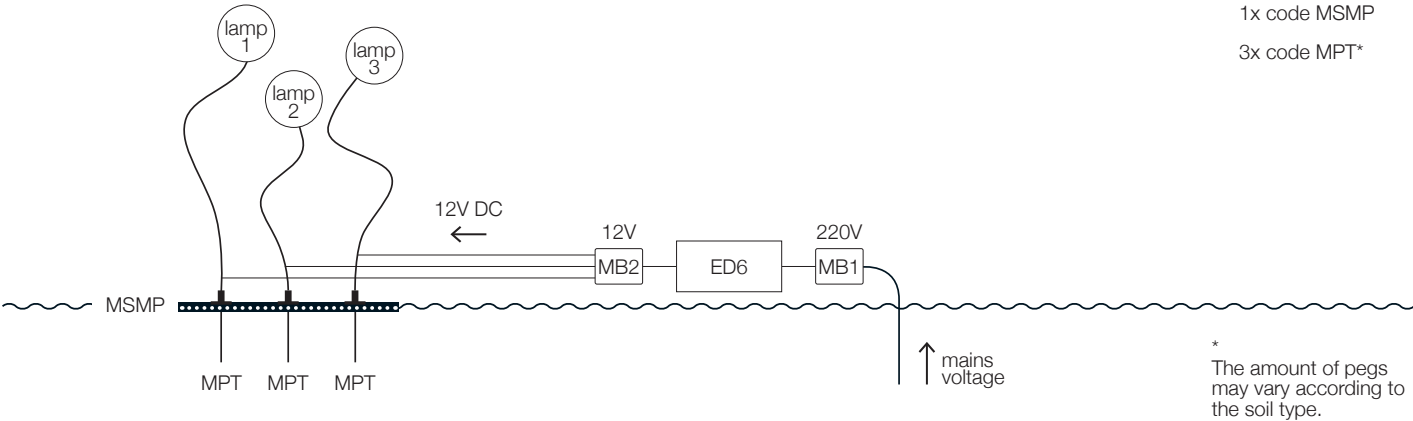


\* The amount of pegs may vary according to the soil type.




Installation suggestions for Outdoor / GEL BOX system and QUICK CONNECTORS system

4	Connection type	For models	Power supply	Access. applied
	GEL BOX system (with well)	More (MR70/MR100/MR130)	provided by client	1x code MB2 1x code MSPT 3x code MPT

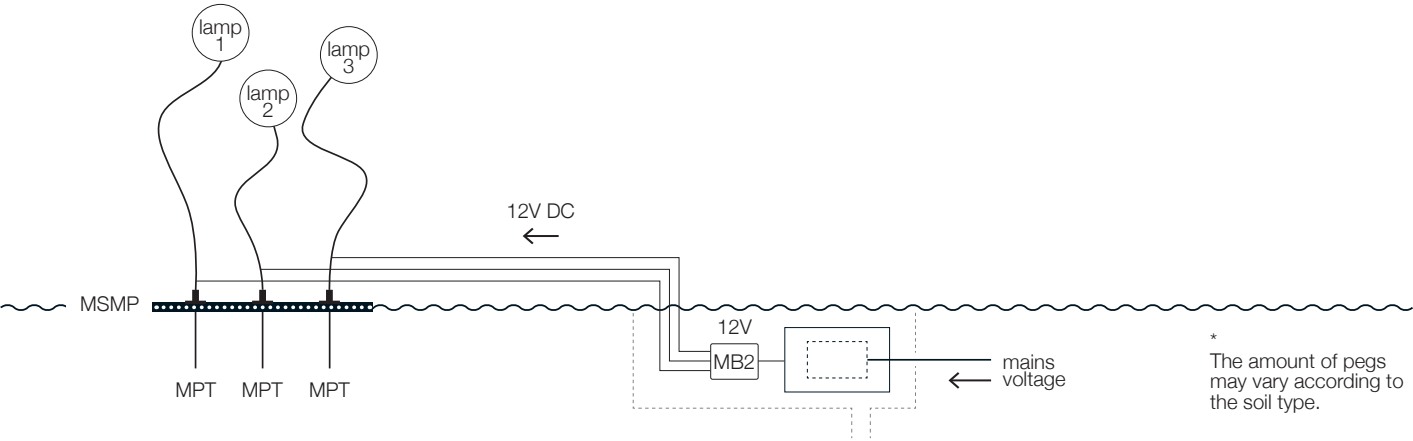


\* The amount of pegs may vary according to the soil type.

5	Connection type	For models	Power supply	Access. applied
	QUICK CONNECTORS system	Syphasera/Syphasfera/Syphaduepassi/More	code ED6CR	1x code ED6CR 1x code CRM 5x code CRS 1x code KP2

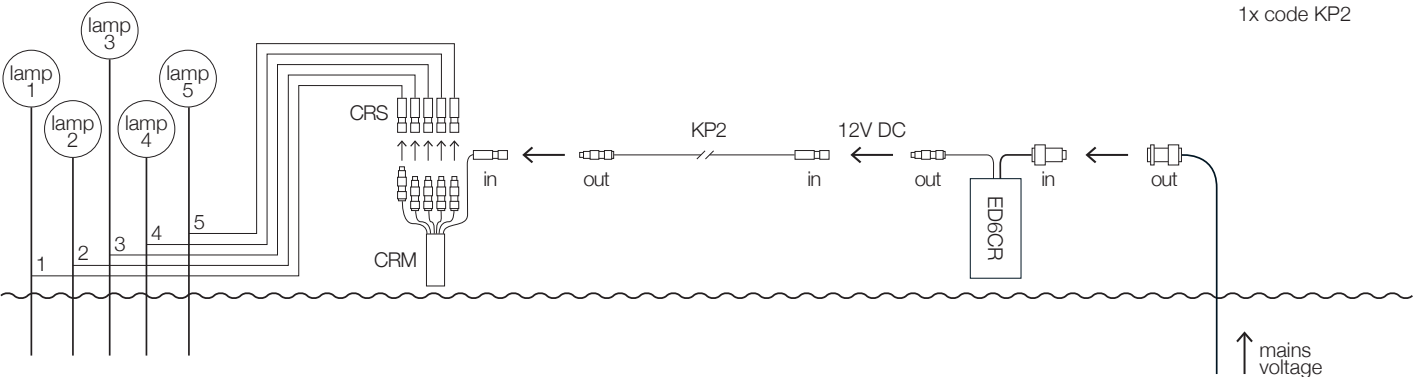


6	Connection type	For models	Power supply	Access. applied
	QUICK CONNECTORS system	Syphasera/Syphasfera/Syphaduepassi/More		2x code CRM 9x code CRS

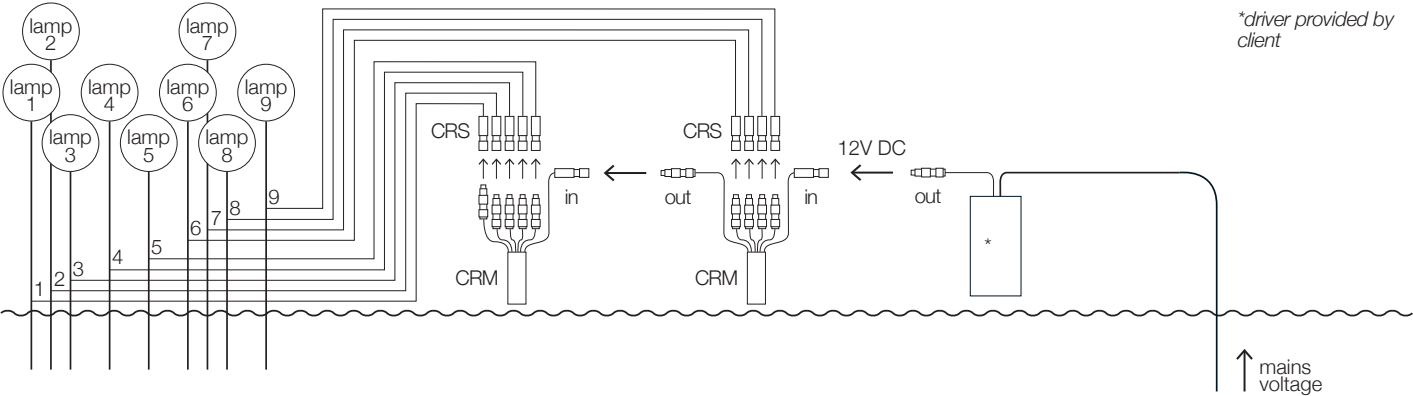

\*driver provided by client



PSU (POWER SUPPLY UNIT) KITS FOR JACKIE O IC-JC / GOLD MOON IC-JC

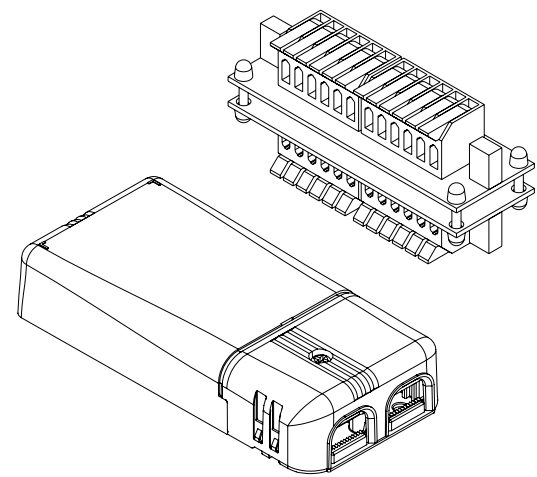


By means of the PSU kit, multiple LED lamps can be controlled simultaneously through a multiple connection board (9x3x5 cm) connected to a driver. In the event of a failure of even a single LED, the board allows the other LED to continue working properly. It is advisable to install the kit in a technical compartment accessible for inspection at a maximum distance of about 5 meters from the point of installation of the jacks or tensioners, in order to avoid voltage drops. The technical compartment must be located in an easily accessible place and large enough to accommodate both the wired multiple connection board and the power supply.

PSU KITS		Price IVA / VAT excl.	
K9WS12	20W driver kit 220-240V (with ED9)	€	85,00 (net price)
	min 5 max 12x1W lamps		
	Triac dimmable		
	driver dimensions 11x5,2x2,2 cm		
K10WS12	20W driver kit 110-240V (with ED10)	€	100,00 (net price)
	min 2 max 12x1W lamps		
	1...10V or PUSH dimmable		
	driver dimensions 11x5,2x2,2 cm		
K11WS12	20W driver kit 110-240V (with ED11)	€	105,00 (net price)
	min 2 max 12x1W		
	DALI dimmable		
	driver dimensions 11x5,2x2,2 cm		
K12WS24	30W driver kit 220-240V (with ED12)	€	155,00 (net price)
	min 13 max 24x1W		
	Triac dimmable		
	driver dimensions 18x6x3,5 cm		
K13WS24	36W driver kit 110-240V (with ED13)	€	155,00 (net price)
	min 2 max 24x1W		
	DALI or PUSH dimmable		
	driver dimensions 16,5x4,1x3,5 cm		



DRIVERS @24V DC FOR PEPITA 65 / PEPITA 102 / JACKIE O / GOLD MOON

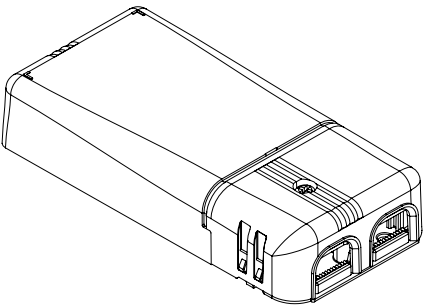


By means of the driver, multiple LED lamps can be controlled simultaneously. In the event of a failure of even a single lamp, the other lamps continue working properly. It is advisable to install the driver in a technical compartment accessible for inspection at a maximum distance of about 5 meters from the point of installation of the lamps, in order to avoid voltage drops. The technical compartment must be located in an easily accessible place and large enough to accommodate the power supply.

DRIVERS @24V dc		Price IVA / VAT excl.	
ED9	rated voltage 220-240V	€	35,00 (net price)
	rated output 20W (min 3 max 16x1W lamps)		
	Triac dimmable		
	dimensions 11x5,2x2,2 cm		
ED11	rated voltage 110-240V	€	55,00 (net price)
	rated output 15W @110V / 16W 240V@ (min 1 max 12x1W lamps)		
	DALI dimmable		
	dimensions 11x5,2x2,2 cm		
ED14	rated voltage 110-240V	€	30,00 (net price)
	rated output 4W (min 1 max 3 lamps)		
	not dimmable		
	dimensions 4x2,7x2,1 cm		




INSTRUCTIONS FOR THE CONNECTION OF MULTIPLE LAMPS RECESSED FOR PLASTERBOARD  
WALL/CEILING PEPITA 65 / PEPITA 102 / AMETISTA

1.

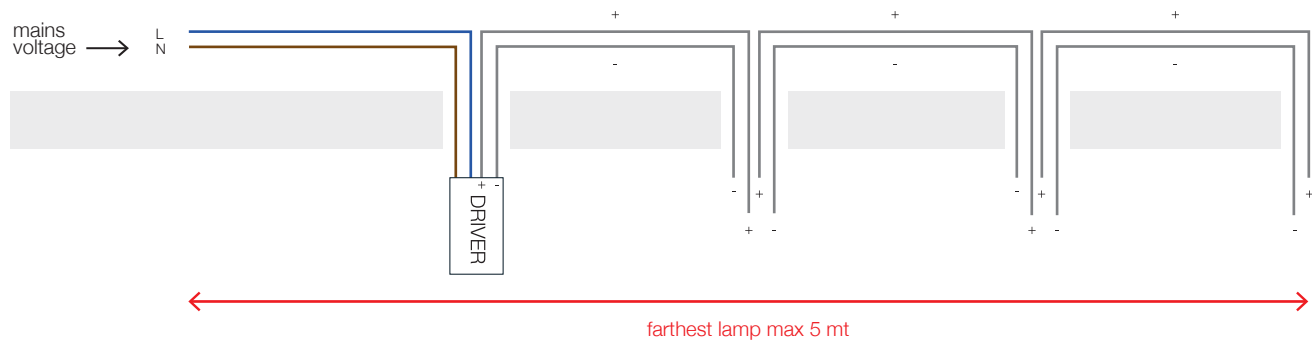


it is recommended to respect the polarity

2.

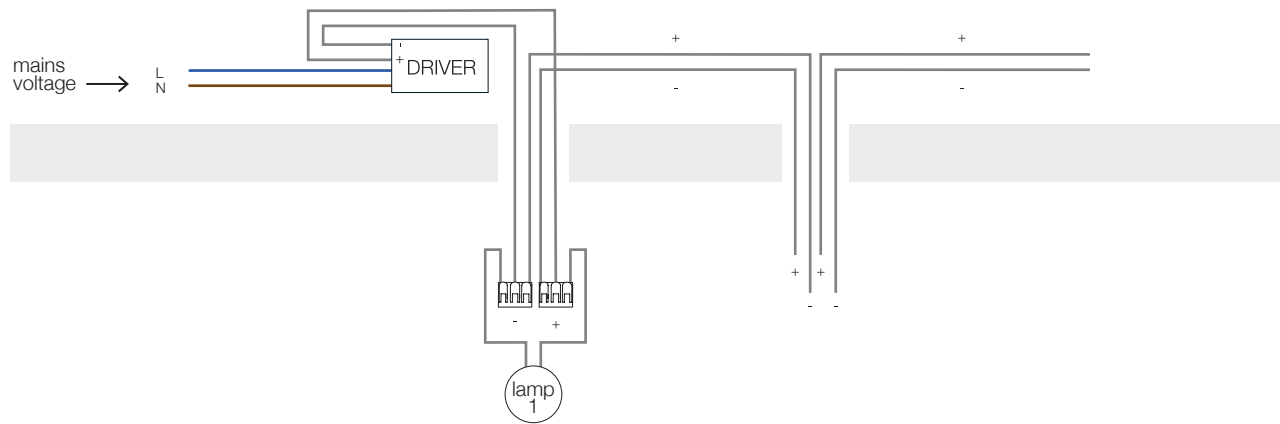

3.

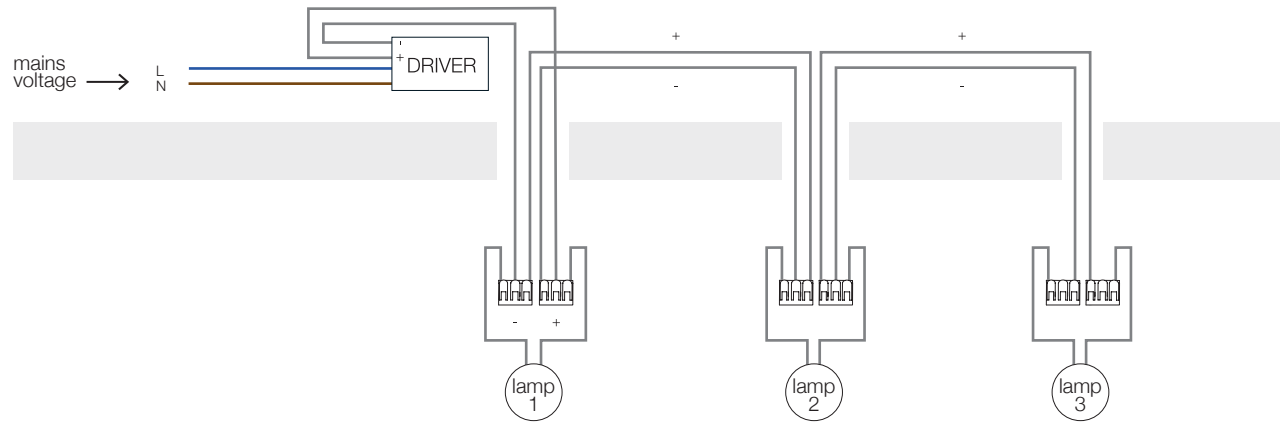

the cable between the lamps is not supplied,  
it is recommended to use one with a minimum section of conductors of 1 mmq



DIMMING WIRING DIAGRAMS

Diagram 1 - IGBT - TRIAC

1 wire for power supply  
1 wire for dimming

WARNING: Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

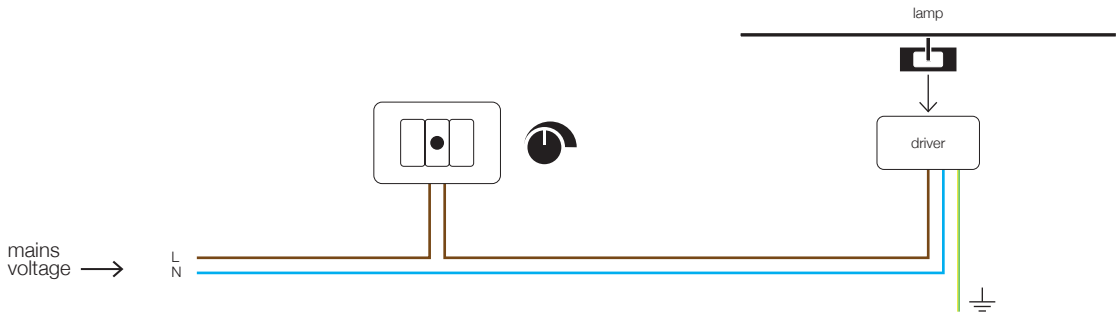


Diagram 2 - PUSH

2 wires for power supply  
2 wires for dimming

WARNING: you need two extra wires, marked in red, in order to dim.


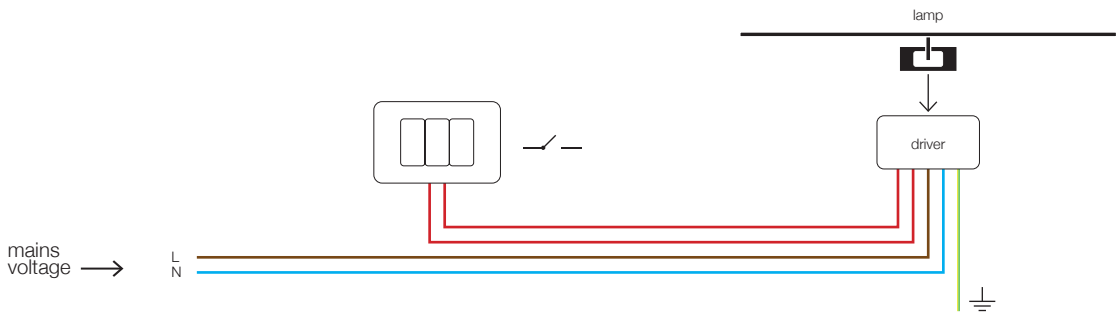


Diagram 3 - 1...10V - DALI

2 wires for power supply  
2 wires for dimming

WARNING: you need two extra wires, marked in red, in order to dim.

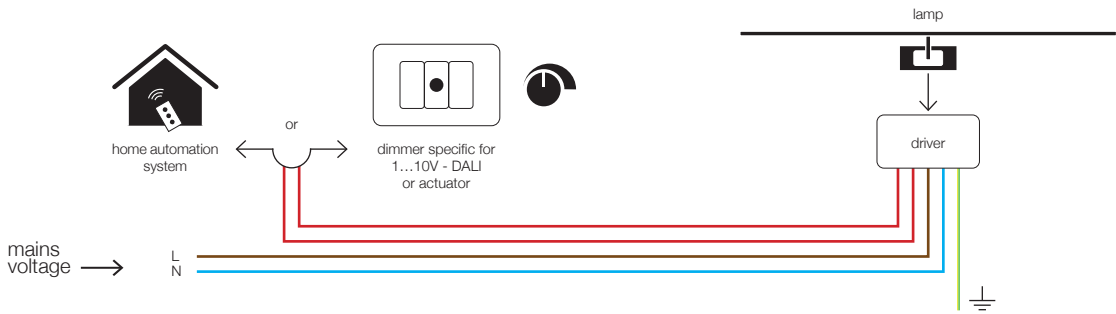

## **Catellani & Smith**

### Offices

via Cimitero 1/A  
I-24020 Villa di Serio, BG  
T. +39 035 656088  
[info@catellanismith.com](mailto:info@catellanismith.com)

### Showrooms

Bergamo  
Via Borfuro, 1 Bergamo  
T. +39 035 210193  
[show-room@catellanismith.com](mailto:show-room@catellanismith.com)

Milano  
Salvioni Milano Durini  
Via Durini, 3 Milano

London  
Ltd. 7-15 Rosebery Ave Clerkenwell  
London EC1R 4SP, U.K.

[www.catellanismith.com](http://www.catellanismith.com)



Catellani & Smith®