



Collection 2024

The collection grows

Trizo21 continues to evolve and we pride to keep innovating. As we conduct research and experiment, our product lines grow and new creations emerge. This year, we are launching the Bilo, Boulo, Audinni and Audinno, with more to come soon.

Take a look and discover our collection!



[Index]

2Thirty	p. 6	Bouly	p. 136
7Ty	p. 26	Code	p. 145
Aude	p. 27	I-Tro	p. 149
Audette	p. 38	Kwa-Kwa	p. 150
Audinni	p. 54	Mini-Pi	p. 153
Audinno	p. 54	Naga	p. 158
Audy	p. 55	N-Tro	p. 161
Aust-In	p. 68	Pin	p. 162
Austere	p. 72	R-Range	p. 165
Bilo	p. 130	Scar-Led	p. 168
Bily	p. 132	Scar-Lite	p. 175
Boulo	p. 135	Sirens	p. 180



2Thirty-C1


[by Bruno Van Meenen]

230V (110V on demand) - **IP50** -  - **CEILING**

1 x LED module 10W (**LED incl.**) - 230V - 1000lm - 2700K - CRI >90 - **TRIAC dimmable**

Ring colors: black, bronze, gold & alu

Also available with honeycomb



Find more options on page 184

2Thirty-CV2


[by Bruno Van Meenen]

230V (110V on demand) - **IP50** -  - **CEILING**

2 x LED module 10W (**LED incl.**) - 230V - 2 x 1000lm - 2700K - CRI >90 - **TRIAC dimmable**

Ring colors: black, bronze, gold & alu

Also available with honeycomb

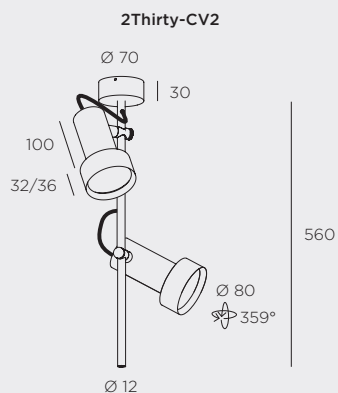

Find more options on page 184







2Thirty-CH2

[by Bruno Van Meenen]

230V (110V on demand) - **IP50** -  - **CEILING**

2 x LED module 10W (**LED incl.**) - 230V - 2 x 1000lm - 2700K - CRI >90 - **TRIAC dimmable**

Ring colors: black, bronze, gold & alu

Also available with honeycomb

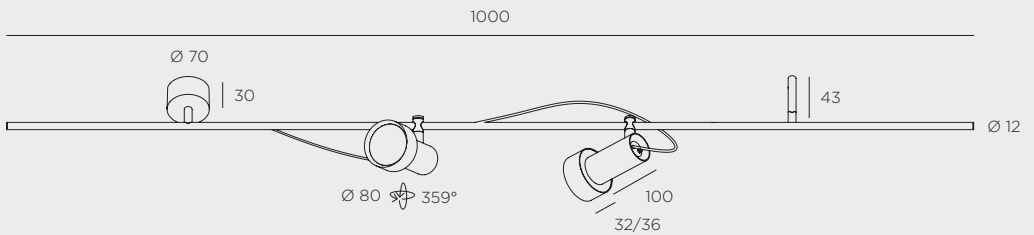




Photo by Corinne - project by Devos Interieur



2Thirty-Floor 1



[by Bruno Van Meenen]

110V-230V - **PU** (PUSH-DIM) on armature - **IP50** - **FLOOR**

1 x LED array 11,8W (LED incl.) - 350mA - 1 x 1241lm - 2700K - CRI >97

Support disc (Ø 170mm x H 2mm) for uneven surfaces included

Ring colors: black, bronze, gold & alu

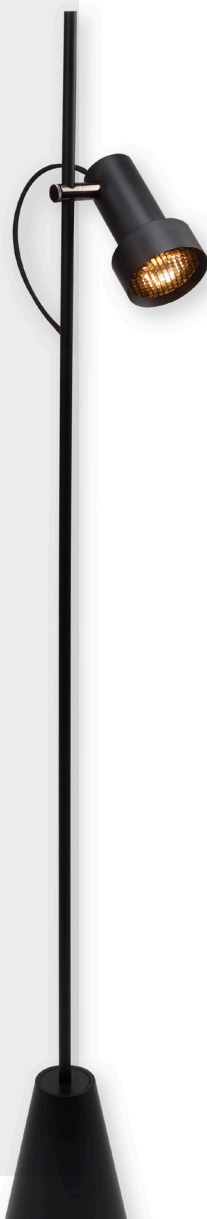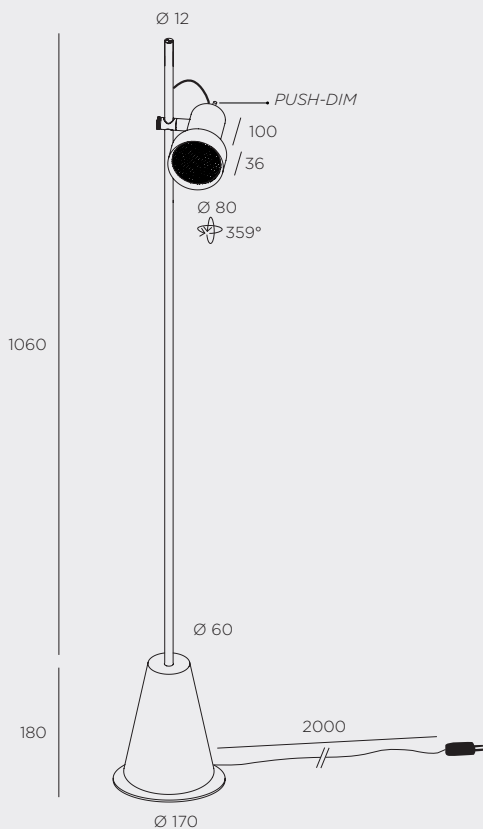

2Thirty-Floor 2

[by Bruno Van Meenen]

110V-230V - **PU** (**PUSH-DIM**) on armature - **IP50** - **FLOOR**
2 x LED array 11,8W (**LED incl.**) - 350mA - 2 x 1241lm - 2700K - CRI >97
Support disc (Ø 170mm x H 2mm) for uneven surfaces included
Ring colors: black, bronze, gold & alu

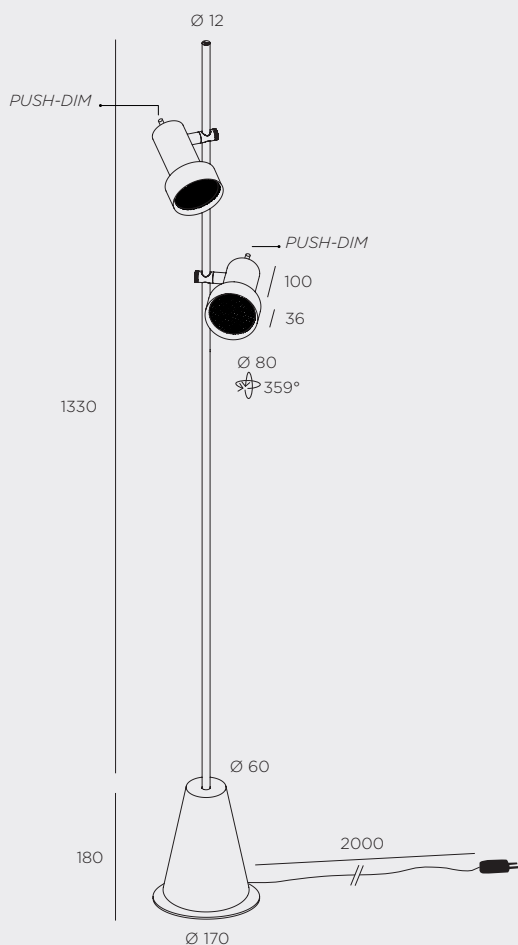










photo by Annick Vermeulen - project by JUMA Architects



2Thirty-W1


[by Bruno Van Meenen]

230V (110V on demand) - **ON/OFF on armature** - **IP50** -  - **WALL**

1 x LED module 10W **(LED incl.)** - 230V - 1000lm - 2700K - CRI >90 - **TRIAC dimmable**

Ring colors: black, bronze, gold & alu

Also available with honeycomb



Find more options on page 185-186

2Thirty-WV2

[by Bruno Van Meenen]


230V (110V on demand) - **ON/OFF on armature** - **IP50** -  - **WALL**

2 x LED module 10W (**LED incl.**) - 230V - 2 x 1000lm - 2700K - CRI >90

TRIAC dimmable

Ring colors: black, bronze, gold & alu

Also available with honeycomb

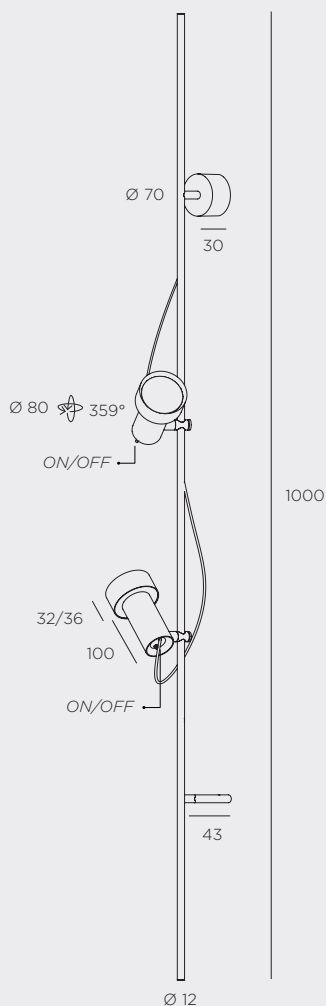

Find more options on page 186





photo by Annick Verinmen - project by JUMA Architects







2Thirty Track 48V


[by Bruno Van Meenen]

48V - **adapter included** - driver required for adapter 48V - **IP50** -  - **TRACK 48V**


1 x LED array 11,8W (**LED incl.**) - 350mA - 1241lm - 2700K - CRI >97

Ring colors: black, bronze, gold & alu

Also available with honeycomb



Find more options on page 187



7Ty in


[by Bruno Van Meenen]

350mA - **required remote driver** - IP50 -  - **CEILING**

1 x LED array 11,8W **(LED incl.)** - 350mA - 1241lm - 2700K - CRI >97

Colors: black, white, bronze, gold & alu

Also available with honeycomb



7Ty up

[by Bruno Van Meenen]

230V - **driver included in base** -  **(TRIAC/IGBT) dimmable** - IP50 or IP65 -  - **CEILING**

1 x LED array 11,8W **(LED incl.)** - 250mA - 913lm - 2700K - CRI >97

Colors: black, white, bronze, gold & alu

Also available with honeycomb




Find more options on page 187

[by Bruno Van Meenen]

1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95

Also available with honeycomb

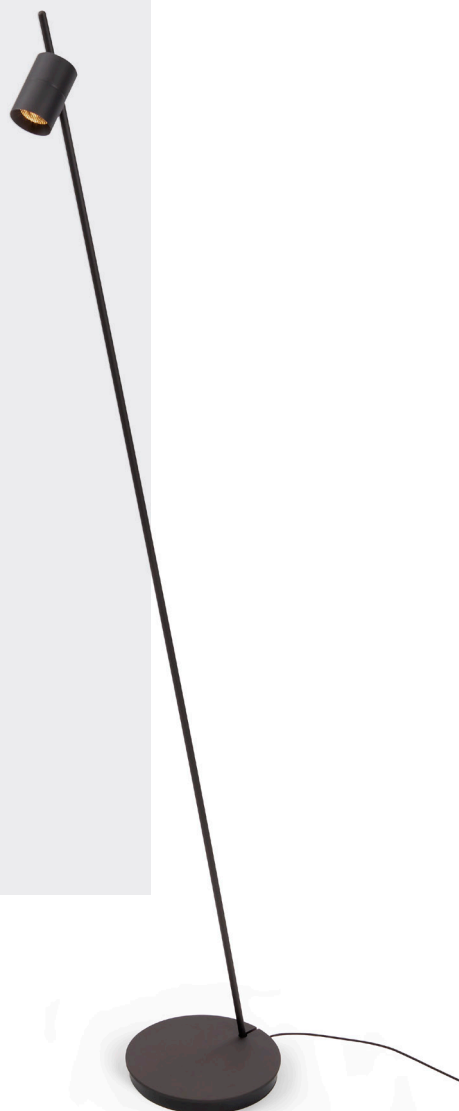





project by Edha Interieur - photo by Space Content Studio





Aude-Table

[by Bruno Van Meenen]

100V-240V - **plugdriver with PU (PUSH-DIM) button on cable** - IP50 -  - **TABLE**

1 x LED array 4,32W (**LED incl.**) - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95

Colors: brass, black, gunmetal, bronze & nickel

Also available with honeycomb






photo by ifthesebeautifulthings



photo by Great Dane and Ceiran Murphy fotografie





photo by Studio Bourgeol - project by BNE Architekten



Aude-Wall L


[by Bruno Van Meenen]

500mA - **required remote driver** - IPSO -  - WALL

1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95

Colors: brass, gunmetal, bronze & nickel

Also available with honeycomb



Find more options on page 188



Audette in


[by Bruno Van Meenen]

350mA - **required remote driver** - **IP50** -  - **CEILING**

1 x LED array 6.25W (**LED incl.**) - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95

Colors: brass, black, white, gunmetal, bronze & nickel

Also available with honeycomb



Find more options on page 188-189



photo by Pilar Shoots - project by LO Architectuur





Audette R6


[by Bruno Van Meenen]

350mA - **required remote driver** - **IP50** -  - **CEILING**

1 x LED array 6,25W (**LED incl.**) - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95

Colors: brass, black, white, gunmetal, bronze & nickel

Also available with honeycomb



Find more options on page 189




Audette up

[by Bruno Van Meenen]


230V - **driver included in base** -  (TRIAC/IGBT) dimmable - IP50 -  - CEILING
 1 x LED array 6,25W (**LED incl.**) - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
 Colors: brass, black & white
 Also available with honeycomb

Audette 1 up



230V - **driver included in base** -  (TRIAC/IGBT) dimmable - IP50 -  - CEILING
 2 x LED array 6,25W (**LED incl.**) - 350mA - 2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95
 Colors: brass, black & white
 Also available with honeycomb

Audette 2 up




Find more options on page 189-191




230V - **driver included in base** - **LC** (TRIAC/IGBT) dimmable - **IP50** - **◇** - **CEILING**
 3 x LED array 6,25W (**LED incl.**) - 350mA - 2700K (3 x 633lm) or 3000K (3 x 673lm) - CRI >95
 Colors: brass, black & white
 Also available with honeycomb

Audette 3 up

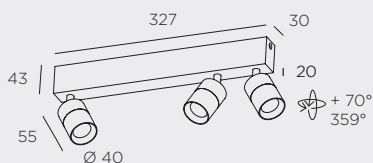

230V - **driver included in base** - **LC** (TRIAC/IGBT) dimmable - **IP50** - **◇** - **CEILING**
 4 x LED array 6,25W (**LED incl.**) - 350mA - 2700K (4 x 633lm) or 3000K (4 x 673lm) - CRI >95
 Colors: brass, black & white
 Also available with honeycomb

Audette 4 up

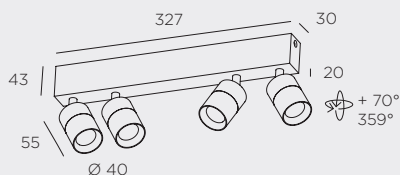

Find more options on page 190-191




Audette up Rounded

[by Bruno Van Meenen]


230V - **driver included in base** - **LC (TRIAC/IGBT) dimmable** - **IP50** - **CEILING**
 1 x LED array 6,25W (**LED incl.**) - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
 Colors: brass, black, white, gunmetal, bronze & nickel
 Also available with honeycomb

Audette 1 up Rounded



230V - **driver included in base** - **LC (TRIAC/IGBT) dimmable** - **IP50** - **CEILING**
 2 x LED array 6,25W (**LED incl.**) - 350mA - 2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95
 Colors: brass, black, white, gunmetal, bronze & nickel
 Also available with honeycomb

Audette 2 up Rounded



Find more options on page 191-192







Audette Wall

[by Bruno Van Meenen]


500mA - **required remote driver** - **IP50** -  - **WALL**

1 x LED array 4,32W (**LED incl.**) - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95

Colors: brass, black, white, gunmetal, bronze & nickel

Also available with honeycomb

Audette W1 in Rounded




230V - **driver included in base** -  **LC (TRIAC/IGBT) dimmable** - **IP50** -  - **WALL**

1 x LED array 4,32W (**LED incl.**) - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95

Colors: brass, black, white, gunmetal, bronze & nickel

Also available with honeycomb

Audette WD1 up Rounded



Find more options on page 192-193



photo by Bert Demasure - project by Laura Calleeuw






Audette Track 48V

[by Bruno Van Meenen]

48V - **adapter included** - driver required for adapter 48V - **IP50** -  - **TRACK 48V**
 1 x LED array 6,25W (**LED incl.:**) - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
 Colors: brass, black, white, gunmetal, bronze & nickel
 Also available with honeycomb



Find more options on page 193-194



photo by Buro Bonito - project by Candéa



photo by Pilar Shoots - project by Ovius





Audinni

[by Bruno Van Meenen]

500mA - **required remote driver** - IP50 or IP55 -  - **CEILING**

1 x LED array 4,32W (**LED incl.**) - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95

Colors: black, white, gunmetal, bronze & nickel

Also available with honeycomb



Ø 46

Find more options on page 194



Audinno

[by Bruno Van Meenen]

350mA - **required remote driver** - IP50 or IP55 -  - **CEILING**

1 x LED array 6,25W (**LED incl.**) - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95

Colors: black, white, gunmetal, bronze & nickel

Also available with honeycomb



Ø 46

Find more options on page 194



Audy-In

[by Bruno Van Meenen]

350mA - **required remote driver** - **IP50 or IP55** -  - **CEILING**

1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95

Colors: brass, black, white, gunmetal, bronze & nickel

Also available with honeycomb



Find more options on page 195





photo by Pilar Sheeps - project by Orlus






Audy Up

[by Bruno Van Meenen]


230V - **driver included in base** - **LC** (TRIAC/IGBT) dimmable - **IP50** - **CEILING**
 1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
 Colors: brass, black, white, gunmetal, bronze & nickel
 Also available with honeycomb

Audy 1 up Rounded



230V - **driver included in base** - **LC** (TRIAC/IGBT) dimmable - **IP50** - **CEILING**
 2 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (2 x 487lm) or 3000K (2 x 517lm) - CRI >95
 Colors: brass, black, white, gunmetal, bronze & nickel
 Also available with honeycomb

Audy 2 up Rounded



Find more options on page 194-195

Audy-Solitaire RF


[by Bruno Van Meenen]

350mA - **required remote driver** - IP40 -  - **SUSPENSION**

1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95

Colors: brass, black, white, gunmetal, bronze & nickel

Also available with honeycomb



Find more options on page 196







Audy-Solitaire Track 48V

[by Bruno Van Meenen]

48V - **adapter included** - driver required for adapter 48V - **IP40** -  - **TRACK 48V**

1 x LED array 6,25W (**LED incl.**) - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95

Colors: brass, black, white, gunmetal, bronze & nickel

Also available with honeycomb




RF 75 = ROD 745
RF 100 = ROD 995





photo by Bert Demasure - project by Laura Calleuw



Audy-Wall


[by Bruno Van Meenen]

500mA - **required remote driver** - IP50 -  - WALL

1 x LED array 4,32W (**LED incl.**) - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95

Colors: brass, black, white, gunmetal, bronze & nickel

Audy-Wall 1S




500mA - **required remote driver** - IP50 -  - WALL

2 x LED array 4,32W (**LED incl.**) - 500mA - 2700K (2 x 487lm) or 3000K (2 x 517lm) - CRI >95

Colors: brass, black, white, gunmetal, bronze & nickel

Audy-Wall 2S



Find more options on page 196-197





photo by Bert Demasure - project by Laura Calleeuw



Aust-In

[by Hans Verstuylt]

350mA - **required remote driver** - **IP40** -  - **CEILING**

1 x LED array 6W (**LED incl.**) - 350mA - 634lm - 2700K - CRI >93

Colors: brass, black, white, gunmetal, bronze & nickel




Aust-In Adjustable

[by Hans Verstuylt]

350mA - **required remote driver** - **IP40** -  - **CEILING**

1 x LED array 6W (**LED incl.**) - 350mA - 634lm - 2700K - CRI >93

Colors: brass, black, white, gunmetal, bronze & nickel



Find more options on page 197



photo by Coléne



photo by Stéphanie Mathias Photography, project by Moonlighting



Austere-Chandelier 1Y

[by Hans Verstuylt]

350mA - **required remote driver + cover/canopy** - IP50 -  - CHANDELIER


3 x LED array 6W (**LED incl.**) - 350mA - 3 x 634lm - 2700K - CRI >93

Each arm has the same length: 3 x 250 mm = Ø 590 mm / 3 x 500 mm = Ø 1090 mm / 3 x 750 mm = Ø 1590 mm.

Colors: brass, black, gunmetal, bronze & nickel

Austere-Chandelier 1Y RF 75/RF 100

shorter RF ROD available on demand

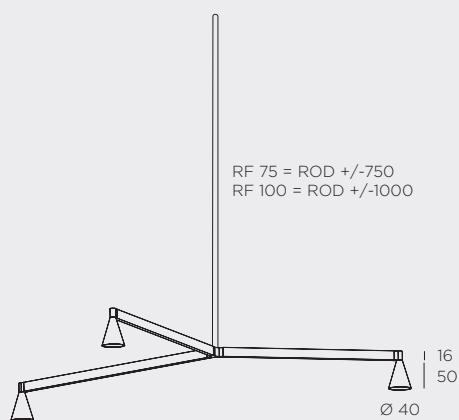

Find more options on page 198

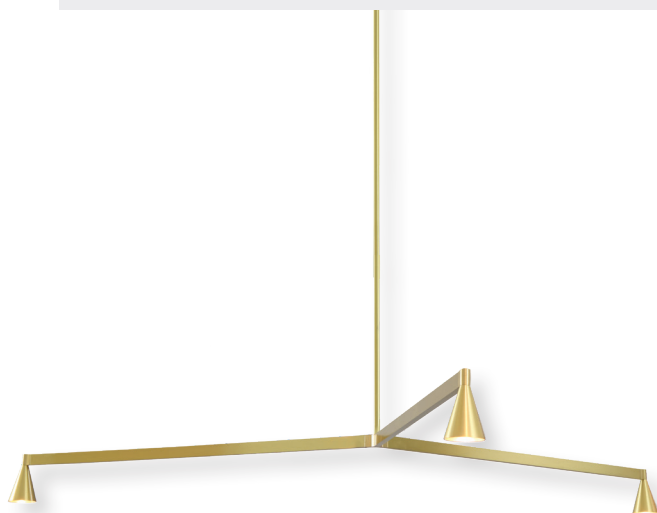






photo by Pilar Shools - project by Ovis



Austere-Chandelier 1X

[by Hans Verstuyft]

350mA - **required remote driver + cover/canopy** - IP50 -  - CHANDELIER

4 x LED array 6W (**LED incl.**) - 350mA - 4 x 634lm - 2700K - CRI >93


Each arm has the same length: 4 x 250 mm = L 516 mm W 316 mm / 4 x 500 mm = L 949 mm W 565 mm /

4 x 750 mm = L 1382 mm W 815 mm

Colors: brass, black, gunmetal, bronze & nickel

Austere-Chandelier 1X RF 75/RF 100

shorter RF ROD available on demand

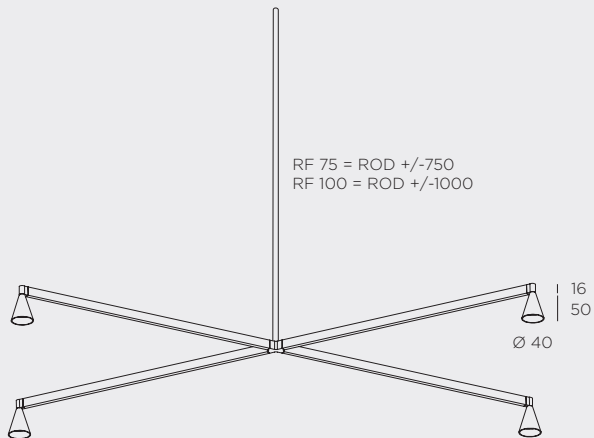

Find more options on page 199





photo by Vincent Leroux - project by STUDIO RAZAVI



Austere-Chandelier 2Y

[by Hans Verstuyft]

350mA - **required remote driver + cover/canopy** - IP50 -  - CHANDELIER

6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93


Each arm on the same level has the same length: 3 x 250 mm = Ø 590 mm /

3 x 500 mm = Ø 1090 mm / 3 x 750 mm = Ø 1590 mm.

Colors: brass, black, gunmetal, bronze & nickel

Austere-Chandelier 2Y RF 75/RF 100

shorter RF ROD available on demand

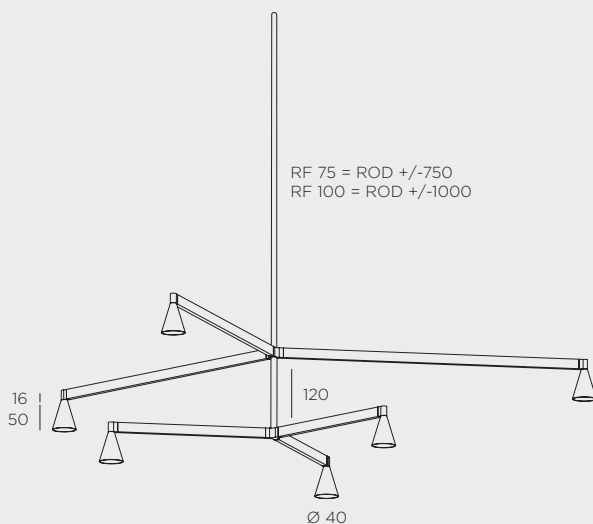

Find more options on page 198



photo by Bert Demasure - project by Laura Calleuw

Austere-Chandelier 2Y RF 100 Bronze with canopy B10





Austere-Chandelier 2X

[by Hans Verstuylt]

350mA - **required remote driver + cover/canopy or base (230V driver incl.)** - IP50 -  - CHANDELIER


8 x LED array 6W (**LED incl.**) - 350mA - 8 x 634lm - 2700K - CRI >93

Each arm on the same level has the same length: 4 x 250 mm = L 516 mm W 316 mm /

4 x 500 mm = L 949 mm W 565 mm / 4 x 750 mm = L 1382 mm W 815 mm.

Colors: brass, black, gunmetal, bronze & nickel

Austere-Chandelier 2X RL 79

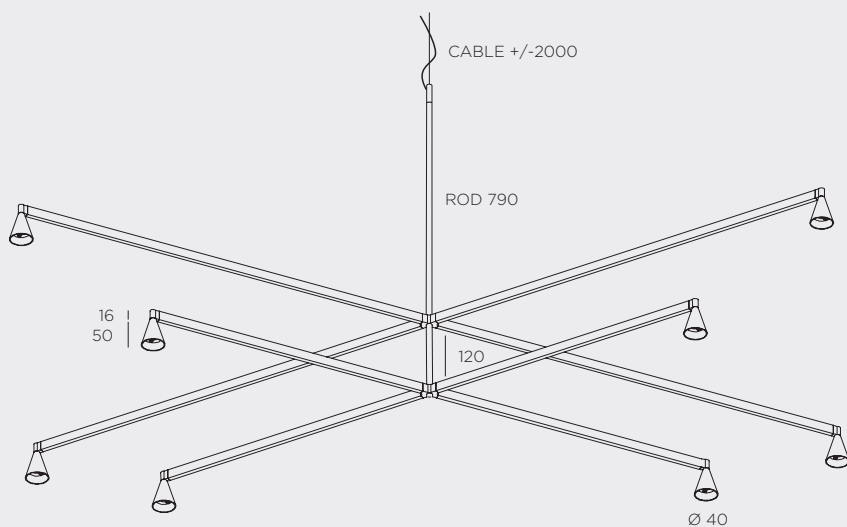

Find more options on page 200



Austere-Chandelier 3Y

[by Hans Verstuyft]

350mA - **required remote driver + cover/canopy or base (230V driver incl.)** - IP50 -  - CHANDELIER


9 x LED array 6W (**LED incl.**) - 350mA - 9 x 634lm - 2700K - CRI >93

Each arm on the same level has the same length:

3 x 250 mm = Ø 590 mm / 3 x 500 mm = Ø 1090 mm / 3 x 750 mm = Ø 1590 mm.

Colors: brass, black, gunmetal, bronze & nickel

Austere-Chandelier 3Y RL 79

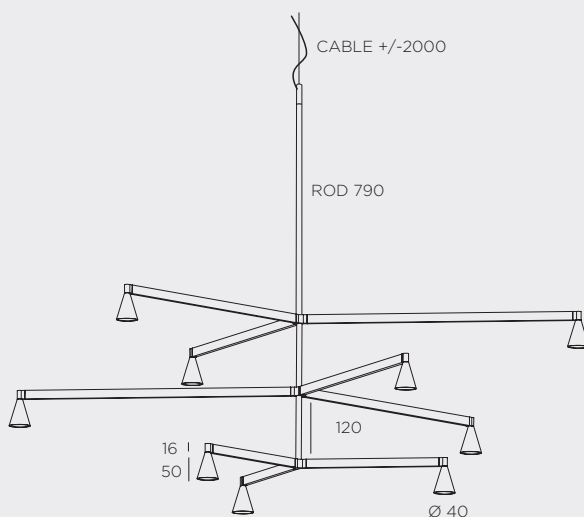

Find more options on page 199



Austere-Chandelier 3Y RL 79 Black



Austere-Chandelier 3X

[by Hans Verstuyft]

350mA - **required remote driver + cover/canopy or base (230V driver incl.)** - IP50 -  - CHANDELIER


12 x LED array 6W (**LED incl.**) - 350mA - 12 x 634lm - 2700K - CRI >93

Each arm on the same level has the same length:


4 x 250 mm = L 516 mm W 316 mm / 4 x 500 mm = L 949 mm W 565 mm / 4 x 750 mm = L 1382 mm W 815 mm.

Colors: brass, black, gunmetal, bronze & nickel

Austere-Chandelier 3X RS 16

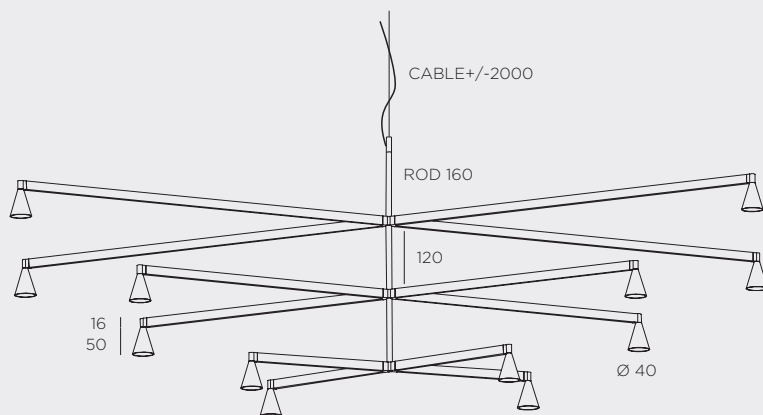

Find more options on page 200

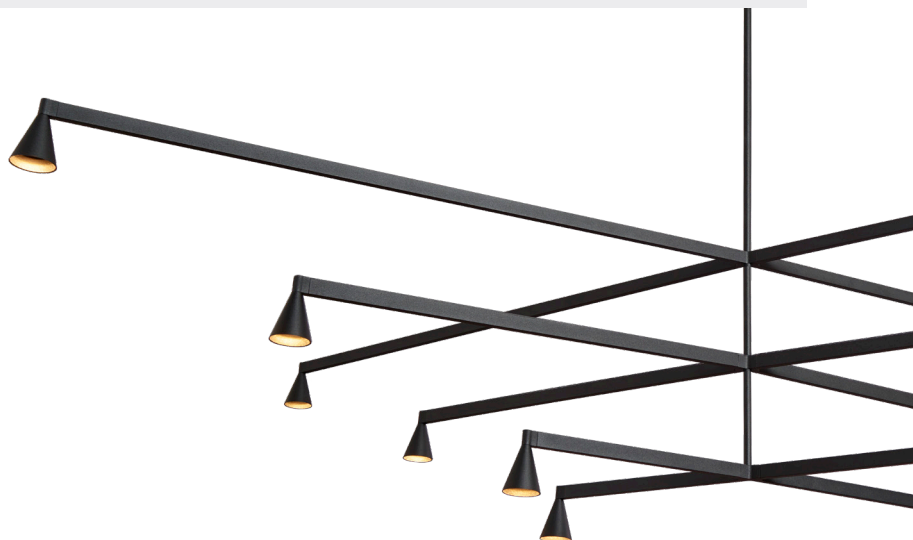

Austere-D1 3


[by Hans Verstuift]

230V - **driver included in base** - **LC** (TRIAC/IGBT) or **1-10** (1-10V) or **PU** (PUSH-DIM) or **DA** (DALI) dimmable - **IP50** - **SUSPENSION**

3 x LED array 6W (**LED incl.**) - 350mA - 3 x 634lm - 2700K - CRI >93

Colors: brass, black, white, gunmetal, bronze & nickel

Austere-D1 3 RF 75/RF 100

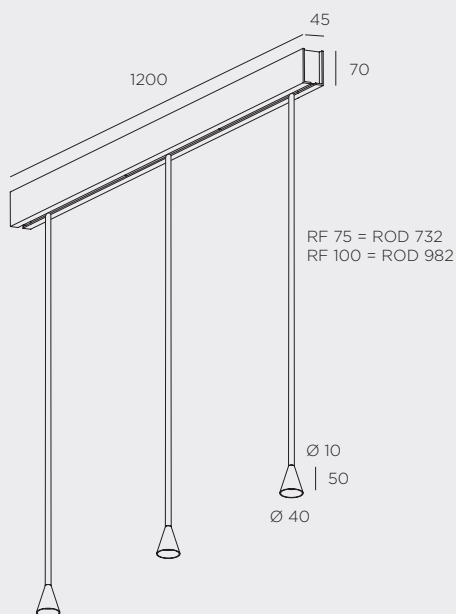

Find more options on page 202






photo by Annick Verminnen - project by Annelien Windy

Austere-D2 5


[by Hans Verstuylt]

230V - **driver included in base** - **LC** (TRIAC/IGBT) or **1-10** (1-10V) or **PU** (PUSH-DIM) or **DA** (DALI) dimmable
5 x LED array 6W (**LED incl.**) - 350mA - 5 x 634lm - 2700K - CRI >93 - **IP50** - **SUSPENSION**
Colors: brass, black, white, gunmetal, bronze & nickel

Austere-D2 5 RF 75/RF 100

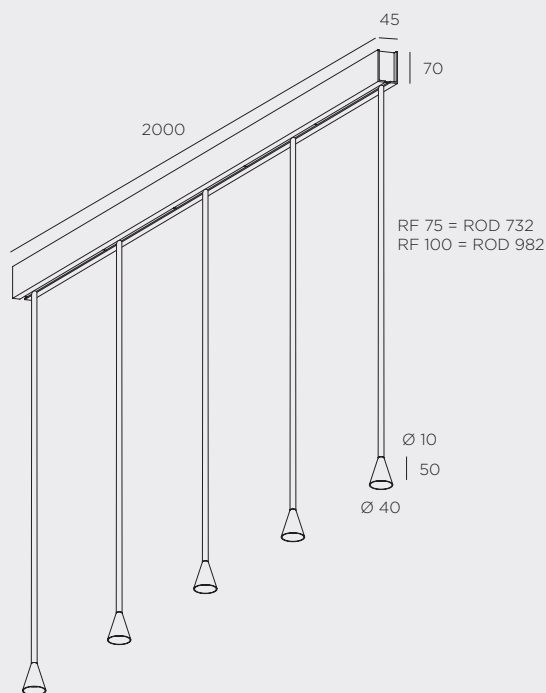

Find more options on page 202

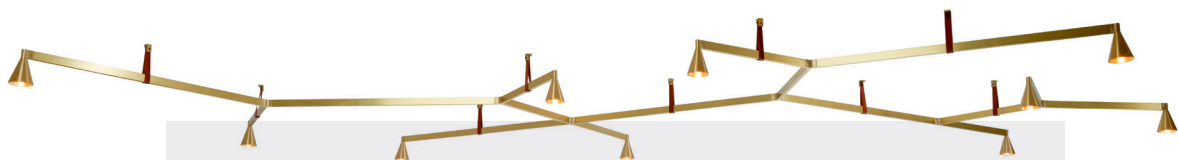

Austere-Elements

[by Hans Verstuyft]


350mA - **required remote driver + cover/canopy or base (230V driver incl.)** - IP50 -  - **CEILING**
LED array 6W (**LED incl.**) - 350mA - 634lm - 2700K - CRI >93

Design your own unique Austere-Elements composition with the application:

www.elements-configurator.trizo21.com

Colors: brass, black, gunmetal, bronze & nickel

Colors straps: darkbrown, oak & black

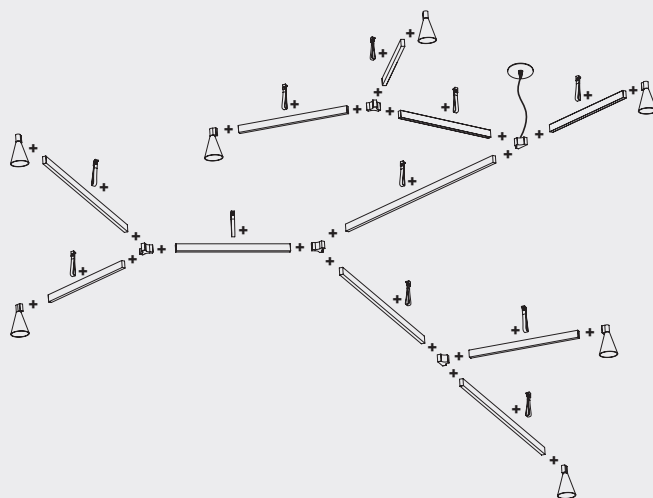

Find more options on page 203



photo by Catene, project by Van Damme-Vandeputte architecten

Austere-Elements ROD 120 Brass - Custom





Austere-Elements 2 levels Brass with oak leather straps and steelcable - Custom



photo by Rafael Vargas, project by GCA Architects







photo by Oded Smadar, project by YGNG Interior Design Studio



Austere-Floor

[by Hans Verstuylt]

100V-240V - plugdriver with  (PUSH-DIM) button on cable - IP40 -  - FLOOR

1 x LED array 6W (LED incl.) - 350mA - 634lm - 2700K - CRI >93

Colors: brass, black, white, gunmetal, bronze & nickel

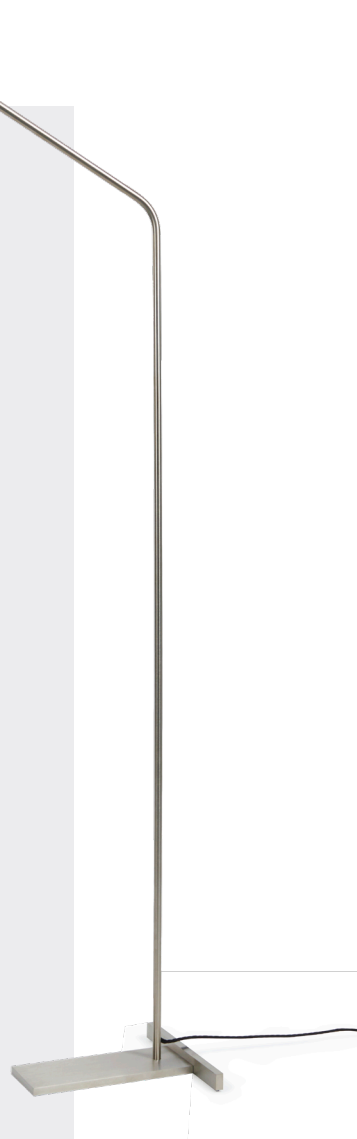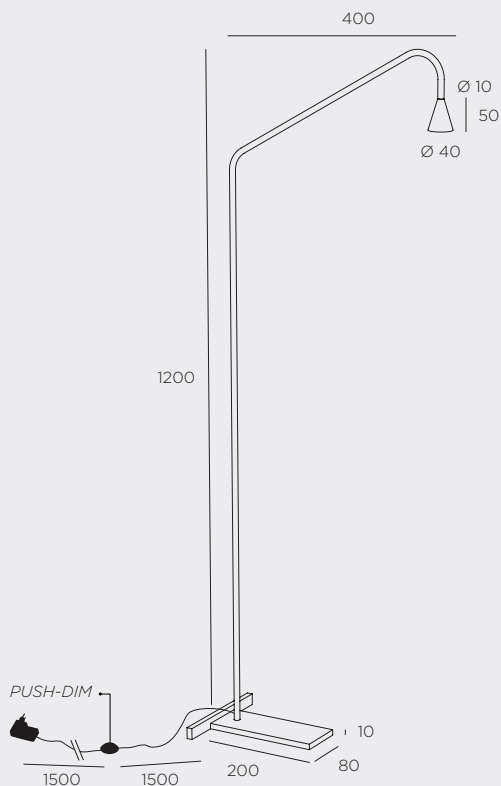







project by Poliform

Austere-Solitaire

[by Hans Verstuyft]


350mA - **required remote driver** - IP40 -  - **SUSPENSION**

1 x LED array 6W (**LED incl.**) - 350mA - 2700K - 634lm - CRI >93

Colors: brass, black, white, gunmetal, bronze & nickel



Austere Solitaire RF



Find more options on page 205





photo by Studio Bourgeat - project by ZOUT Ontwerphuis



photo by Cefline, Project by Anja Visser







Austere-Solitaire Track 48V

[by Hans Verstuylt]

48V - **adapter included** - driver required for adapter 48V - **IP40** -  - **TRACK 48V**

1 x LED array 6W (**LED incl.**) - 350mA - 634lm - 2700K - CRI >93

Colors: brass, black, white, gunmetal, bronze & nickel


Austere-Solitaire RF 75/RF 100 Track 48V



ROD 745/995

Ø 10
50
Ø 40



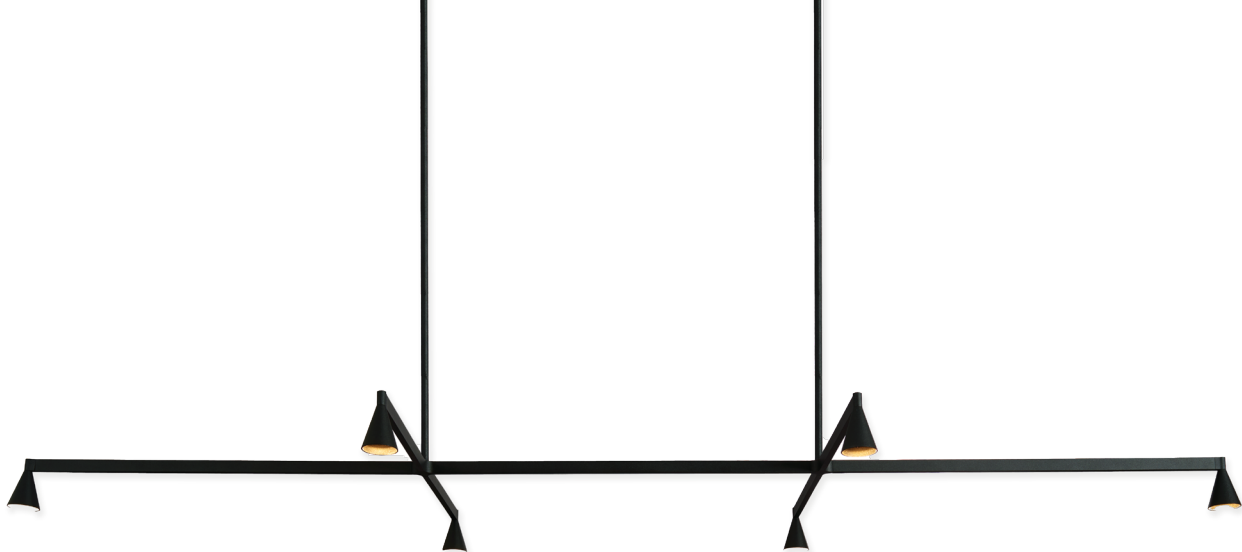

Austere-Suspension 1+


[by Hans Verstuyft]

350mA - **required remote driver + cover/canopy** - IP50 -  - SUSPENSION

6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93

Colors: brass, black, gunmetal, bronze & nickel

Austere-Suspension 1+ RF 75/RF 100

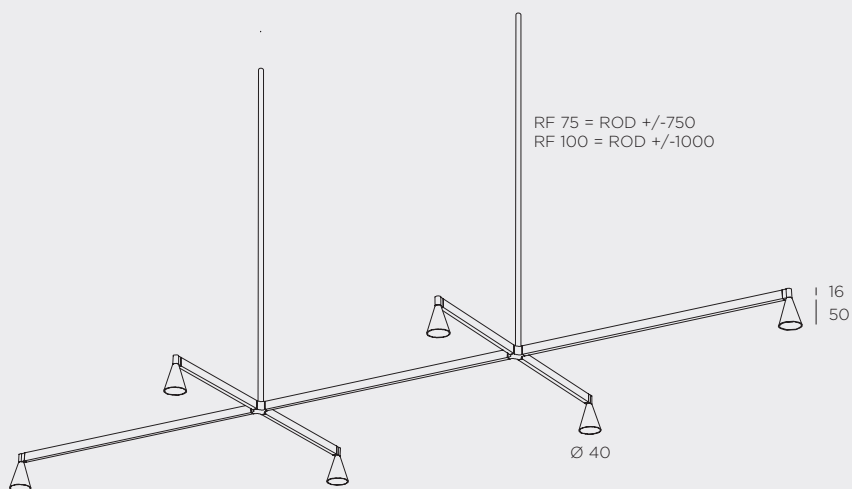

Find more options on page 205-206







photo by Cofelhe - project by Loes Loodts

Austere-Suspension 1+ RF 100 Brass with canopy B10





Austere-Suspension 1+


[by Hans Verstuyft]

350mA - **required remote driver + cover/canopy or base (230V driver incl.)** - IP50 -  - **SUSPENSION**

6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93

Colors: brass, black, gunmetal, bronze & nickel

Austere-Suspension 1+ RS 16

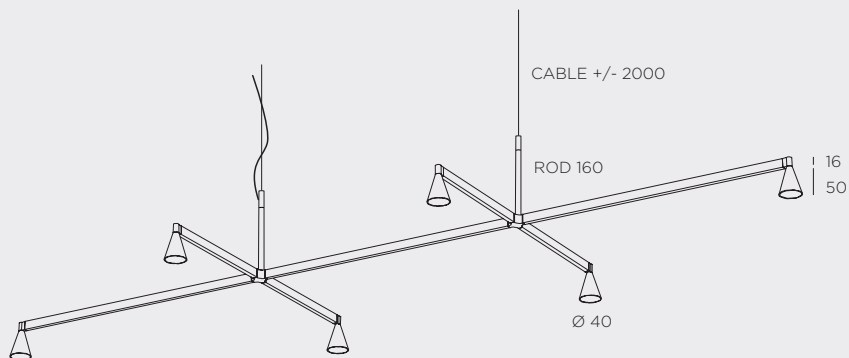

Find more options on page 206

Austere-Suspension 1+


[by Hans Verstuylt]

350mA - **required remote driver + cover/canopy or base (230V driver incl.)** - IP50 -  - SUSPENSION

6 x LED array 6W (**LED incl.**) - 350mA - 6 x 634lm - 2700K - CRI >93

Colors: brass, black, gunmetal, bronze & nickel

Austere-Suspension 1+ RL 79

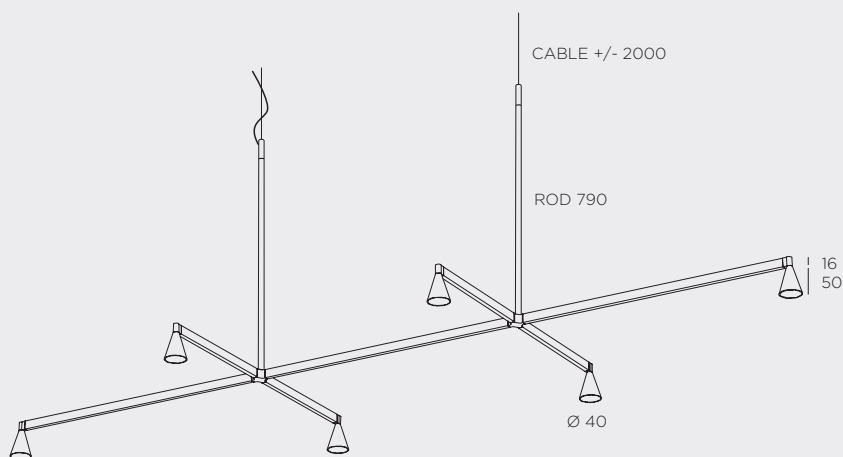

Find more options on page 206





photo by Bert Demasure - project by Laura Coleeuw



photo by Catene - project by Caon Architecten



Austere-Suspension RL 79 Black - Custom




Austere-Table

[by Hans Verstuyft]

100V-240V - plugdriver with **PU (PUSH-DIM)** button on cable - IP40 - **TABLE**

1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93

Colors: brass, black, white, gunmetal, bronze & nickel

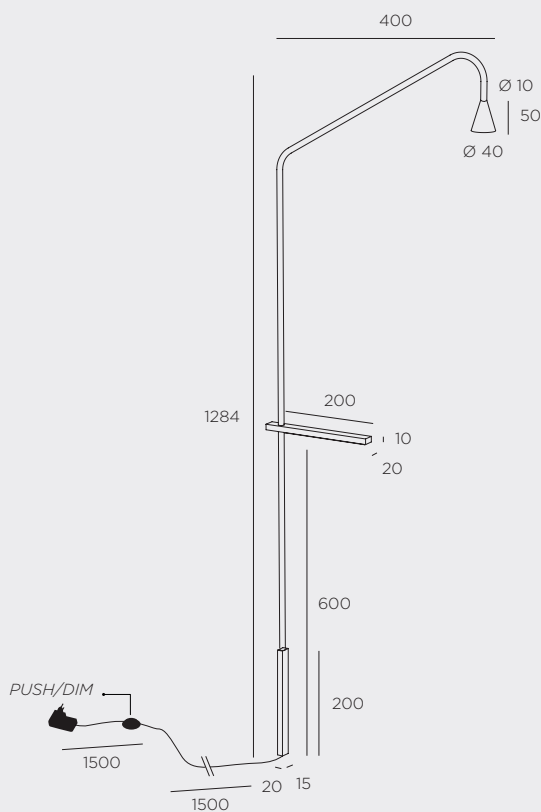



Austere-Table - Custom

project by ABS Bouwteam

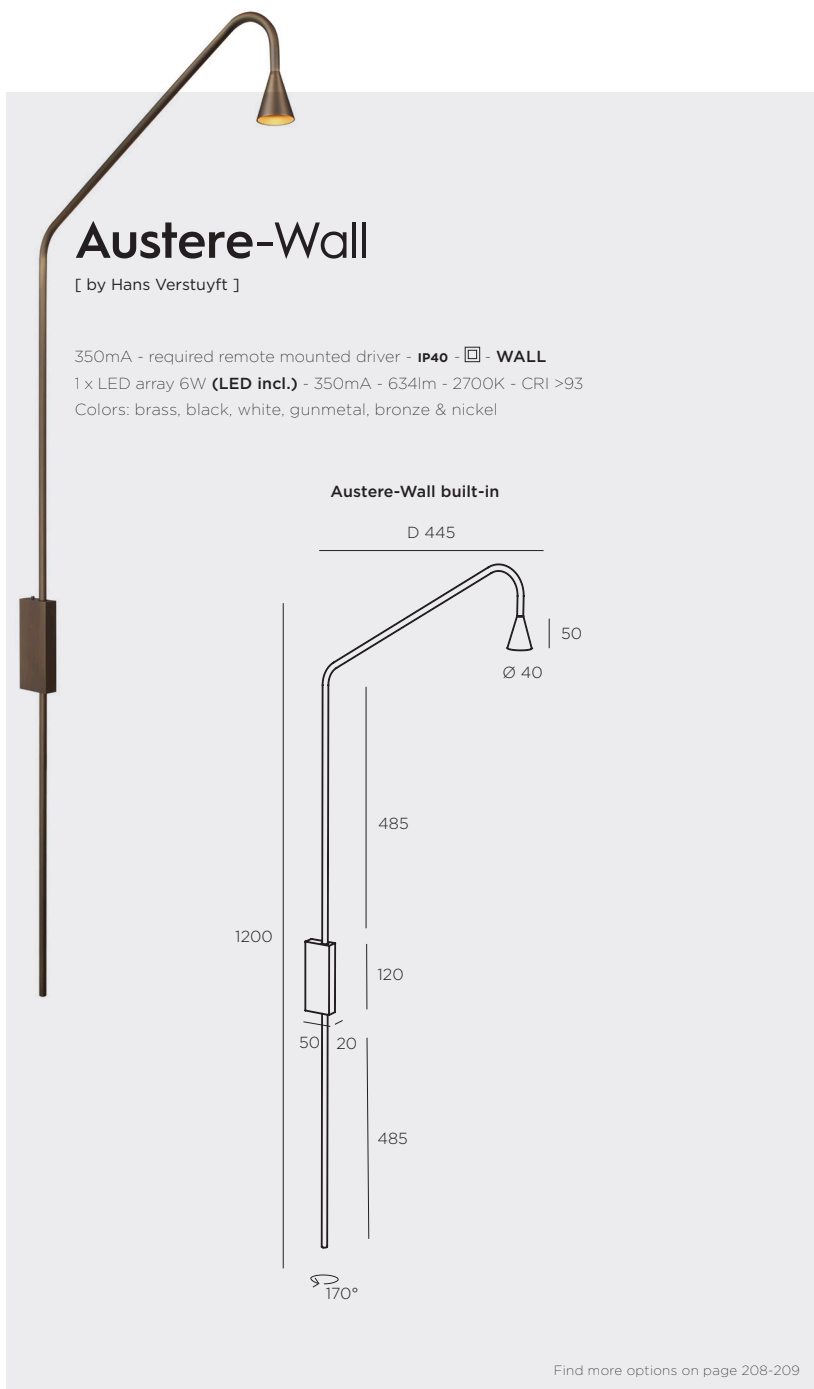


photo by Silvia Lopez - project by Conih, Cert





Austere-Table - Custom Chateau de Versailles



Find more options on page 208-209





photo by Viola Epler fotografie - project by Legend Hotel





Bilo in

[by Bruno Van Meenen]

350mA - **required remote driver** - IP50 or IP65 -  - **CEILING**

1 x 21 LED 0,14W (**LED incl.**) - 350mA - 400lm - 2700K/3000K - CRI >90

Colors: black, white, bronze, gold & alu

Bilo C in




150mA/350mA - **required remote driver** - IP50 or IP65 -  - **WALL**

1 x 21 LED 0,14W (**LED incl.**) - 150mA/350mA - 170lm/400lm - 2700K/3000K - CRI >90

Colors: black, white, bronze, gold & alu

Bilo W in



Find more options on page 209-212

Bilo up

[by Bruno Van Meenen]

230V - **driver included in base** -  **(TRIAC/IGBT) dimmable** - **IP50 or IP65** -  - **CEILING**

1 x 21 LED 0.14W **(LED incl.)** - 350mA - 400lm - 2700K/3000K - CRI >90

Colors: black, white, bronze, gold & alu




Find more options on page 208-209



Bily 16 in

[by Bruno Van Meenen]

350mA - **required remote driver** - IP50 or IP65 -  - **CEILING**
1 x LED array 11W (**LED incl.**) - 350mA - 1125lm - 2700K - CRI >97
Colors: black, white, bronze, gold & alu



Find more options on page 213



Bily 16 up

[by Bruno Van Meenen]

230V - **driver included in base** -  **(TRIAC/IGBT) dimmable** - IP50 or IP65 -  - **CEILING**
1 x LED array 11W (**LED incl.**) - 350mA - 1125lm - 2700K - CRI >97
Colors: black, white, bronze, gold & alu



Find more options on page 213





Boulo

[by Bruno Van Meenen]

350mA - **required remote driver** - IP50 or IP65 -  - **CEILING**

1 x 21 LED 0,14W **(LED incl.)** - 350mA - 400lm - 2700K/3000K - CRI >90

Colors: black, white, bronze, gold & alu

Boulo C in



150mA/350mA - **required remote driver** - IP50 or IP65 -  - **WALL**

1 x 21 LED 0,14W **(LED incl.)** - 150mA/350mA - 170lm/400lm - 2700K/3000K - CRI >90

Colors: black, white, bronze, gold & alu

Boulo W in



Find more options on page 213-215

Bouly 16

[by Bruno Van Meenen]



350mA - **required remote driver** - **IP50 or IP65** -  - **CEILING**

1 x LED array 11W **(LED incl.)** - 350mA - 1125lm - 2700K - CRI >97



Find more options on page 215

Bouly 4

[by Bruno Van Meenen]

350mA - **required remote driver** - **IP50 or IP65** -  - **CEILING**

1 x 4 LED 0.96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93



Find more options on page 215











Bouly 16 BATHROOM



Bouly 4 OUT


Bouly Table

[by Bruno Van Meenen]

230V - **EU-plugdriver with PU (PUSH-DIM) button on cable** - **IP40** - **TABLE**

1 x 4 LED 0.96W (**LED incl.**) - 350mA - 456lm - 2700K - CRI >93

Colors: black, white, grey & chrome



Bouly W/C

[by Bruno Van Meenen]

350mA - **required remote driver** - **IP50** - **WALL & CEILING**

1 x 4 LED 0.96W (**LED incl.**) - 350mA - 456lm - 2700K - CRI >93

Colors: black, white, grey & chrome



Find more options on page 216








Code 1

[by Bruno Van Meenen]

230V - **driver included in base** -  **(non-dimmable)** or  **(IGBT) dimmable** - **IP40 or IP55** -  - **CEILING**
 1 x 4 LED 0.96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
 Colors: black, white, alu, bronze & chrome

Code 1 LED



Find more options on page 216-217




Code 2

[by Bruno Van Meenen]

230V - **driver included in base** -  **(non-dimmable)** or  **(IGBT) dimmable** - **IP40 or IP55** -  - **CEILING**
 1 x 8 LED 0.96W **(LED incl.)** - 350mA - 912lm - 2700K - CRI >93
 Colors: black, white, alu, bronze & chrome

Code 2 LED



Find more options on page 217




Code W

[by Bruno Van Meenen]

230V G9 - 1 x HALO QT14 max. 60W or 1 x G9 LED - **IP50 or IP55** -   - **Bulb excluded** - **WALL**
Colors: black, white, alu, bronze & chrome


Code W G9



350mA - **required remote driver** - **IP50 or IP55** -  - **WALL**

1 lighting side : 1 x 4 LED 0.96W (**LED incl.**) - 350mA - 456lm - 2700K - CRI >93
2 lighting sides : 2 x 4 LED 0.96W (**LED incl.**) - 350mA - 2 x 456lm - 2700K - CRI >93
Colors: black, white, alu, bronze & chrome

Code W LED




Find more options on page 217-218







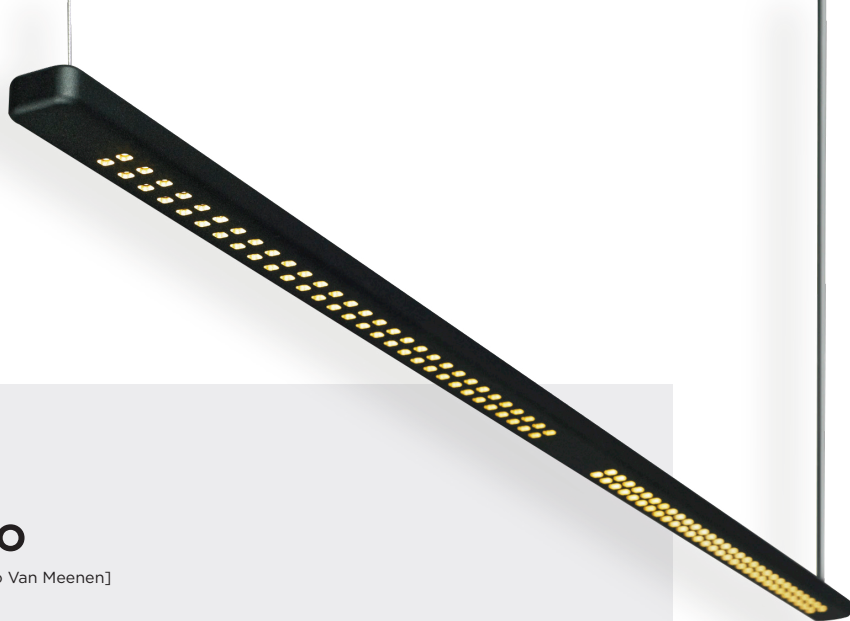

I-Tro


[by Bruno Van Meenen]

24Vdc - **required remote driver** - IP30 -  - **SUSPENSION**

1 lighting side : 120 x SMD LED 30W **(LED incl.)** - 24Vdc - 2280lm - 2850K - CRI >90

2 lighting sides : 240 x SMD LED 60W **(LED incl.)** - 24Vdc - 4560lm - 2850K - CRI >90

Colors: black & white

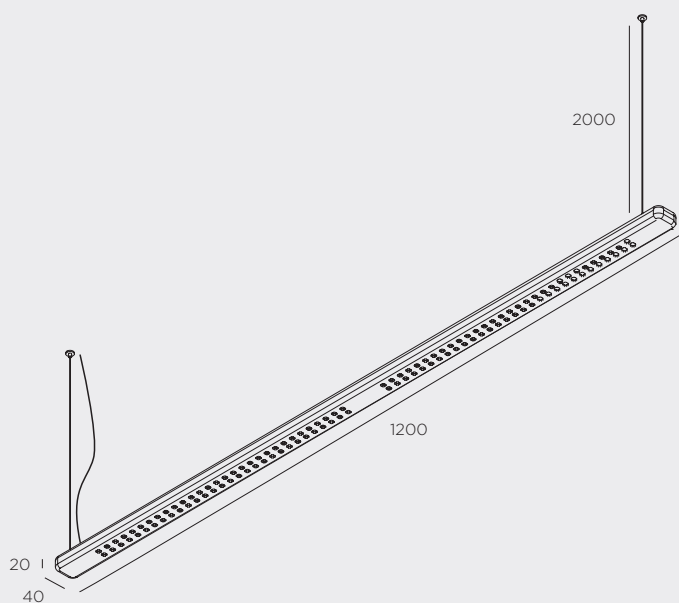

Find more options on page 218

Kwa-Kwa

[by Bruno Van Meenen]




12V - **transformer excluded** - G53 - 1 x R111 HALO max. 75W or R111 LED - **IP20** - 

Bulb excluded - **WALL & CEILING**

Color: alu

Kwa-Kwa 1F Round



Find more options on page 218-220







Mini-Pi in

[by Bruno Van Meenen]

350mA - **required remote driver** - IP40 -  - **CEILING**

1 x 4 LED 0.96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93

Colors: black, white, alu & bronze

Mini-Pi 1 in

Ø 60



50

Ø 56



-85° / +85°
359°

350mA - **required remote driver** - IP40 -  - **CEILING**

2 x 4 LED 0.96W **(LED incl.)** - 350mA - 2 x 456lm - 2700K - CRI >93

Colors: black, white, alu & bronze

Mini-Pi 2 in

115



50

Ø 56




-85° / +85°
359°



Find more options on page 220-221





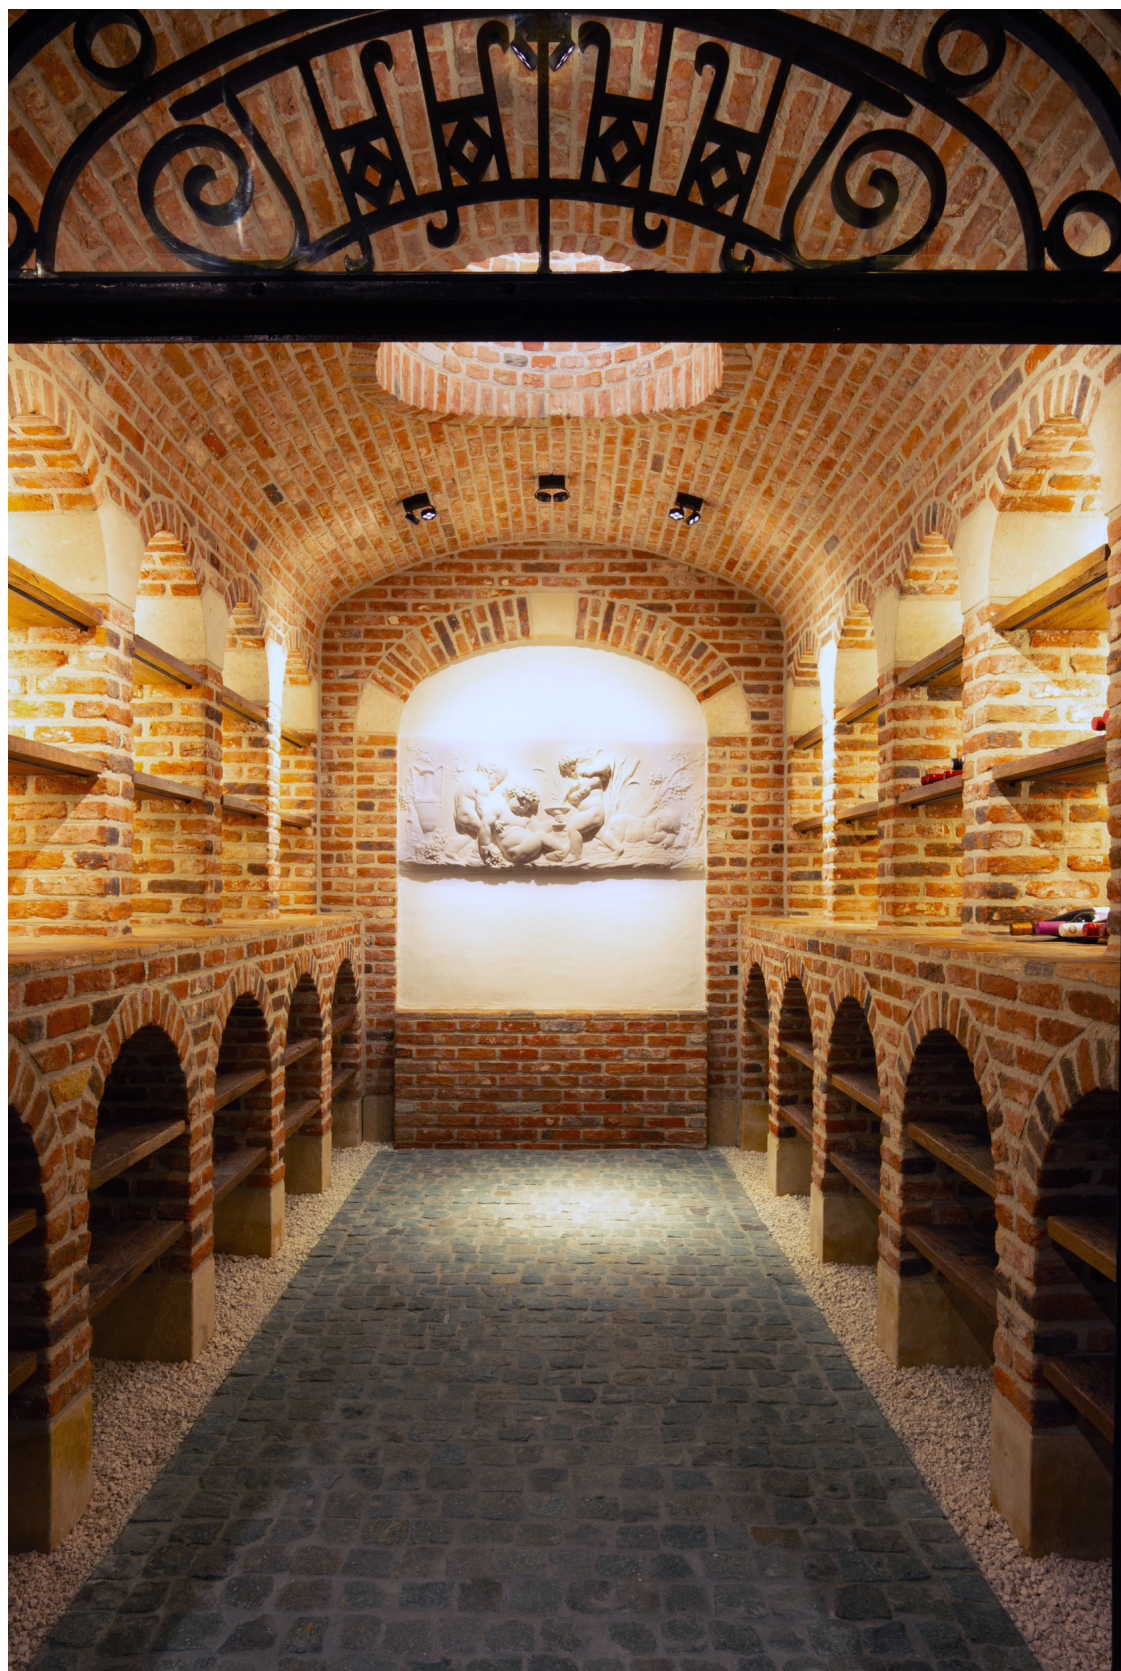



Mini-Pi up


[by Bruno Van Meenen]

230V - **driver included in base** - **(non-dimmable)** or **(TRIAC/IGBT) dimmable** -


IP40 - - **WALL & CEILING**

4 LED 0.96W **(LED incl.) per module** - 350mA - 456lm - 2700K - CRI >93


Colors: black, white, alu & bronze



-85° / +85°
359°



-85° / +85°
359°



-85° / +85°
359°

Find more options on page 220-221



Mini-Pi Track

[by Bruno Van Meenen]

48V - **adapter included** - driver required for adapter 48V - **IP40** - - **TRACK 48V**

1 x 4 LED 0.96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93

Colors: black, white, alu & bronze

Mini-Pi 1 Track 48V



-85° / +85°
359°

Find more options on page 221



Naga

[by Bruno Van Meenen]


110V-230V - GU10 LED - **IP20** -  - **bulb excluded** - **CEILING**

Colors: black, white, bronze & gold







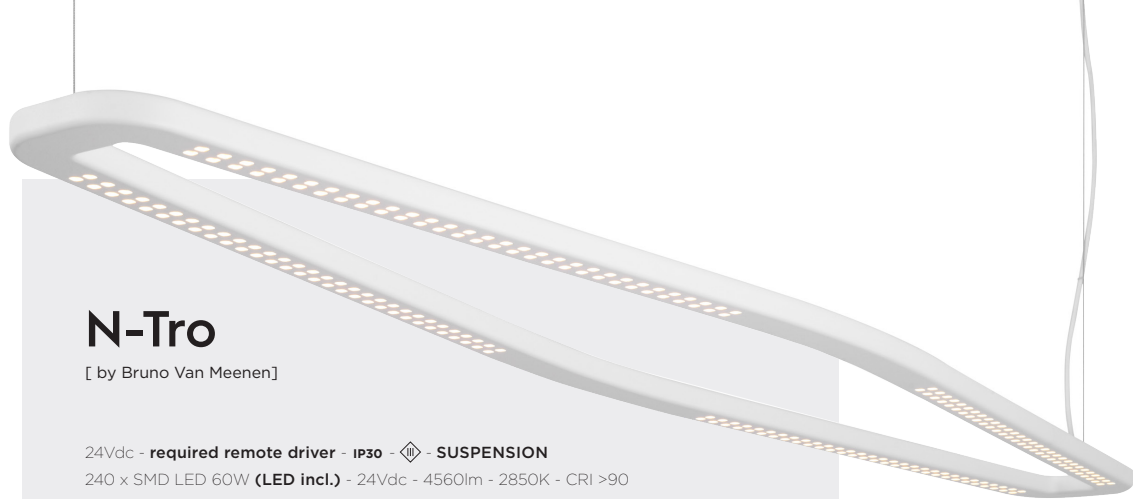


N-Tro

[by Bruno Van Meenen]

24Vdc - **required remote driver** - IP30 -  - **SUSPENSION**

240 x SMD LED 60W (**LED incl.**) - 24Vdc - 4560lm - 2850K - CRI >90

Colors: black & white

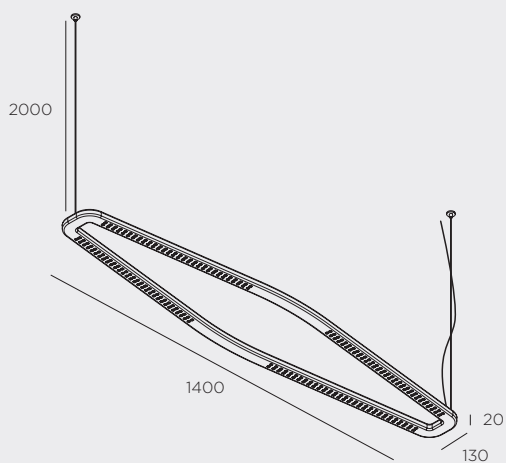

Find more options on page 221



Pin-In


[by Bruno Van Meenen]

12V - **transformer excluded** - IP20 - - **bulb excluded** - **CEILING**

G53 - 1 x R111 max. 100W or R111 LED

Colors: black, white, alu, bronze & chrome

Pin-In 1



Find more options on page 222

Pin-Up


[by Bruno Van Meenen]

230V - **transformer included in base** - (TRIAC/IGBT) dimmable - IP20 - **bulbs excluded** - **WALL & CEILING**

G53 - 2 x R111 LED max. 45W

Colors: black, white, alu, bronze & chrome

Pin-Up 2 LED



Find more options on page 222-223





Pin-Up 4 white



R51 in

[by Bruno Van Meenen]



350mA - required remote mounted - **IP40** -  - **CEILING**

1 x 4 LED 0.96W (LED incl.) - 350mA - 456lm - 2700K - CRI >93

colors: black, white & chrome

R51 in LED



Find more options on page 223-226

R52 up


[by Bruno Van Meenen]

GU10 - 2 x HALO QPAR16 (alu reflector / no cool beam) max. 50W or

2 x GU10 LED max. 20W - **IP20** -  - **bulbs excluded** - **CEILING**

colors: black & white

R52 up GU10



Find more options on page 223-226







Scar-Led

[by Bruno Van Meenen]



110V-230V - **remote driver included: driver fits through cutout hole of fixture** -

NO (non-dimmable) - **IP50** - **WALL**

1 x LED 0.96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93

aperture : 25 x 45 mm - depth for driver behind fixture : min. 55 mm

230V - **remote driver included: driver fits through cutout hole of fixture, except DALI** -


1-10 (1-10V) or PU (PUSH-DIM) or DA (DALI) dimmable - **IP50** - **WALL**

1 x LED 1.38W **(LED incl.)** - 500mA - 157lm - 2700K - CRI >93

aperture : 25 x 55 mm - depth for driver behind fixture : min. 72 mm

colors: black, white, alu & bronze

Scar-Led 1FDS built-in 60




110V-230V - **driver included in base** - **NO (non-dimmable)** - **IP50**

1 x LED 0.96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93

colors: black, white, alu & bronze

Scar-Led 1FDS built-up



Find more options on page 226-228















Scar-Lite

[by Bruno Van Meenen]

110V-230V - **remote driver included: driver fits through cutout hole of fixture** - **NO** - **ON/OFF on armature** - **IP50** - **◇** - **WALL**

1 x LED 0.96W (**LED incl.**) - 350mA - 114lm - 2700K - CRI >93

aperture : 25 x 45 mm - depth for driver behind fixture : min. 55 mm

230V - **remote driver included: driver fits through cutout hole of fixture**

PU (**PUSH-DIM**) on armature - **IP50** - **◇** - **WALL**


1 x LED 1.38W (**LED incl.**) - 500mA - 157lm - 2700K - CRI >93

aperture : 25 x 55 mm - depth for driver behind fixture : min. 72 mm

colors: black, white, alu & bronze



Scar-Lite 1FDS built-in



110V-230V - **driver in base** - **NO** **ON/OFF on armature**


1 x LED 0.96W (**LED incl.**) - 350mA - 114lm - 2700K - CRI >93 - **IP50** - **◇** - **WALL**

230V - **driver in base** - **PU** (**PUSH-DIM**) on armature

1 x LED 1.38W (**LED incl.**) - 500mA - 157lm - 2700K - CRI >93 - **IP50** - **◇** - **WALL**

colors: black, white, alu & bronze

Scar-Lite 1FDS built-up



Find more options on page 228





photo by Bert Demasure - project by Laura Calleuw







Sirens


[by Olga Bielawska]

110V-230V

E27 - only energy saving bulbs (LED or FLUO) - **IP50** -  - **WALL & CEILING**

colors: black, white & copper

Sirens W/C diffuser glass




Find more options on page 229-230





photo by Hannelore Veeleert, project by Donum

Specifications



2Thirty-C1

230V (110V on demand) - TRIAC dimmable

1 x 10W (LED incl.) - 1000lm

2700K - CRI >90 - **IP50** - □

Beam: N = narrow 12° or M = medium 24° or W = wide 40°

Ring:
black
bronze
gold
alu



Also available with honeycomb



2Thirty-C1 in

230V (110V on demand) - TRIAC dimmable

1 x 10W (LED incl.) - 1000lm

2700K - CRI >90 - **IP50** - □

Beam: N = narrow 12° or M = medium 24° or W = wide 40°

Ring:
black
bronze
gold
alu



Also available with honeycomb



2Thirty-C1 in 350mA

350mA - dimmable

1 x 11,8W (LED incl.) - 1241lm

2700K - CRI >97 - **IP50** - ◇

Beam: N = narrow 12° or M = medium 24° or W = wide 40°

Ring:
black
bronze
gold
alu



Also available with honeycomb



2Thirty-CV2

230V (110V on demand) - TRIAC dimmable

2 x 10W (LED incl.) - 2 x 1000lm

2700K - CRI >90 - **IP50** - □

Beam: N = narrow 12° or M = medium 24° or W = wide 40°

Ring:
black
bronze
gold
alu



Also available with honeycomb



2Thirty-C2 in

230V (110V on demand) - TRIAC dimmable

2 x 10W (LED incl.) - 2 x 1000lm

2700K - CRI >90 - **IP50** - □

Beam: N = narrow 12° or M = medium 24° or W = wide 40°

Ring:
black
bronze
gold
alu



Also available with honeycomb



2Thirty-C2 in 350mA

350mA - dimmable

2 x 11,8W (LED incl.) - 2 x 1241lm

2700K - CRI >97 - **IP50** - ◇

Beam: N = narrow 12° or M = medium 24° or W = wide 40°

Ring:
black
bronze
gold
alu



Also available with honeycomb



2Thirty-CH2

230V (110V on demand) - TRIAC dimmable
 2 x 10W (LED incl.) - 2 x 1000lm
 2700K - CRI >90 - **IP50** - 
 Beam: N = narrow 12° or M = medium 24° or W = wide 40°

Ring:
 black 
 bronze 
 gold 
 alu 

Also available with honeycomb



2Thirty-Floor 1

110V-230V/350mA - PUSH-DIM on armature
 1 x 11,8W (LED incl.) - 1 x 1241lm
 2700K - CRI >97 - **IP50** - 
 Beam: N=narrow 12° or M=medium 24°

Ring:
 black 
 bronze 
 gold 
 alu 



2Thirty-Floor 2

110V-230V/350mA - PUSH-DIM on armature
 2 x 11,8W (LED incl.) - 2 x 1241lm
 2700K - CRI >97 - **IP50** - 
 Beam: N=narrow 12° or M=medium 24°

Ring:
 black 
 bronze 
 gold 
 alu 



2Thirty-W1

230V (110V on demand) - ON/OFF on armature
 TRIAC dimmable
 1 x 10W (LED incl.) - 1000lm
 2700K - CRI >90 - **IP50** - 
 Beam: N = narrow 12° or M = medium 24° or W = wide 40°
 Also available with honeycomb

Ring:
 black 
 bronze 
 gold 
 alu 



2Thirty-W1 in

230V (110V on demand) - ON/OFF on armature

TRIAC dimmable

1 x 10W (LED incl.) - 1000lm

2700K - CRI >90 - **IP50** - □

Beam: N = narrow 12° or M = medium 24° or W = wide 40°

Also available with honeycomb

Ring:
black
bronze
gold
alu



2Thirty-W1 in 350mA

350mA - PUSH-DIM on armature


1 x 11,8W (LED incl.) - 1241lm

2700K - CRI >97 - **IP50** - ◇

Beam: N = narrow 12° or M = medium 24° or W = wide 40°

Also available with honeycomb

Ring:
black
bronze
gold
alu



2Thirty-W1 plug

230V (110V on demand) - ON/OFF on armature


1 x 10W (LED incl.) - 1000lm

2700K - CRI >90 - **IP50** - □

Beam: N = narrow 12° or M = medium 24° or W = wide 40°

Also available with honeycomb

Ring:
black
bronze
gold
alu



2Thirty-WH2

230V (110V on demand) - ON/OFF on armature

TRIAC dimmable

2 x 10W (LED incl.) - 2 x 1000lm

2700K - CRI >90 - **IP50** - □

Beam: N = narrow 12° or M = medium 24° or W = wide 40°

Also available with honeycomb

Ring:
black
bronze
gold
alu



2Thirty-WV2

230V (110V on demand) - ON/OFF on armature

TRIAC dimmable

2 x 10W (LED incl.) - 2 x 1000lm


2700K - CRI >90 - **IP50** - □

Beam: N = narrow 12° or M = medium 24° or W = wide 40°

Also available with honeycomb

Ring:
black
bronze
gold
alu





2Thirty Track 48V

48V/350mA

1 x 11,8W (LED incl.) - 1241lm

2700K - CRI >97 - **IP50** -

Beam: N = narrow 12° or M = medium 24° or W = wide 40°

Ring:
black
bronze
gold
alu



Also available with honeycomb



2Thirty Track 230V

230V - TRIAC/IGBT dimmable

1 x 10W (LED incl.) - 1000lm


2700K - CRI >90 - **IP50** -

Beam: N = narrow 12° or M = medium 24° or W = wide 40°

Ring:
black
bronze
gold
alu



Also available with honeycomb



7Ty in

350mA

1 x 11,8W (LED incl.) - 1241lm


2700K - CRI >97 - **IP50** -

Beam: N = narrow 12° or M = medium 24° or W = wide 40°

black
white
bronze
gold
alu



Also available with honeycomb



7Ty up

230V/250mA - TRIAC/IGBT dimmable

1 x 11,8W (LED incl.) - 913lm


2700K - CRI >97 - **IP50** -

Beam: N = narrow 12° or M = medium 24° or W = wide 40°

black
white
bronze
gold
alu



Also available with honeycomb



7Ty up BATHROOM/OUT

230V/250mA - TRIAC/IGBT dimmable


1 x 11,8W (LED incl.) - 913lm

2700K - CRI >97 - **IP55** -

Beam: N = narrow 12° or M = medium 24° or W = wide 40°

black
white
bronze
gold
alu



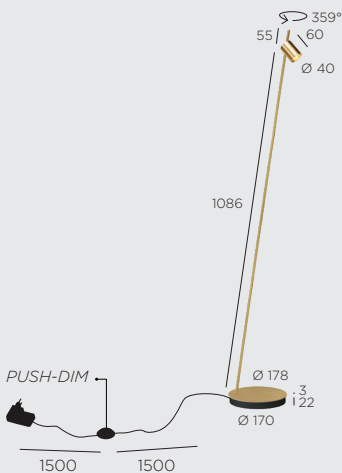


Aude-Floor

100V-240V/500mA - PUSH-DIM button on cable
 1 x 4,32W (LED incl.)
 2700K (487lm) or 3000K (517lm) - CRI >95 - **IP50** - 
 Beam: 40°

brass 
 gunmetal 
 bronze 
 nickel 

Also available with honeycomb



Aude-Table

100V-240V/500mA - PUSH-DIM button on cable
 1 x 4,32W (LED incl.)
 2700K (487lm) or 3000K (517lm) - CRI >95 - **IP50** - 
 Beam: 40°

brass 
 black 
 gunmetal 
 bronze 
 nickel 

Also available with honeycomb




Aude-Wall L

500mA
 1 x 4,32W (LED incl.)
 2700K (487lm) or 3000K (517lm) - CRI >95 - **IP50** - 
 Beam: M = medium 23° or W = wide 40°

brass 
 gunmetal 
 bronze 
 nickel 

Also available with honeycomb



Aude-Wall L plug

100V-240V/500mA - PUSH-DIM button on cable
 1 x 4,32W (LED incl.)
 2700K (487lm) or 3000K (517lm) - CRI >95 - **IP50** - 
 Beam: M = medium 23° or W = wide 40°

brass 
 gunmetal 
 bronze 
 nickel 

Also available with honeycomb



Audette in

350mA
 1 x 6,25W (LED incl.)
 2700K (633lm) or 3000K (673lm) - CRI >95 - **IP50** - 
 Beam: M = medium 23° or W = wide 40°

brass 
 black 
 white 
 gunmetal 
 bronze 
 nickel 

Also available with honeycomb



Audette-Duo in

350mA

1 x 6,25W (LED incl.)

2700K (633lm) or 3000K (673lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white



Also available with honeycomb



Audette-Varié in

350mA

1 x 6,25W (LED incl.)


2700K (633lm) or 3000K (673lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white



Also available with honeycomb



Audette R6

350mA

1 x 6,25W (LED incl.)


2700K (633lm) or 3000K (673lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white
gunmetal
bronze
nickel



Also available with honeycomb



Audette-Duo R6

350mA

1 x 6,25W (LED incl.)


2700K (633lm) or 3000K (673lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white



Also available with honeycomb



Audette 1 up

230V/350mA - TRIAC/IGBT dimmable

1 x 6,25W (LED incl.)


2700K (633lm) or 3000K (673lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white



Also available with honeycomb



Audette 2 up

230V/350mA - TRIAC/IGBT dimmable

2 x 6,25W (LED incl.)


2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white



Also available with honeycomb



Audette 3 up


230V/350mA - TRIAC/IGBT dimmable
3 x 6,25W (LED incl.)

2700K (3 x 633lm) or 3000K (3 x 673lm) - CRI >95 - IP50 - ◇

Beam: M = medium 23° or W = wide 40°

Also available with honeycomb

brass
black
white



Audette 4 up


230V/350mA - TRIAC/IGBT dimmable
4 x 6,25W (LED incl.)

2700K (4 x 633lm) or 3000K (4 x 673lm) - CRI >95 - IP50 - ◇

Beam: M = medium 23° or W = wide 40°

Also available with honeycomb

brass
black
white



Audette-Duo 1 up


230V/350mA - TRIAC/IGBT dimmable
1 x 6,25W (LED incl.)

2700K (633lm) or 3000K (673lm) - CRI >95 - IP50 - ◇

Beam: M = medium 23° or W = wide 40°

Also available with honeycomb

brass
black
white



Audette-Duo 2 up

230V/350mA - TRIAC/IGBT dimmable
2 x 6,25W (LED incl.)

2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95 - IP50 - ◇

Beam: M = medium 23° or W = wide 40°

Also available with honeycomb

brass
black
white



Audette-Duo 3 up


230V/350mA - TRIAC/IGBT dimmable
3 x 6,25W (LED incl.)

2700K (3 x 633lm) or 3000K (3 x 673lm) - CRI >95 - IP50 - ◇

Beam: M = medium 23° or W = wide 40°

Also available with honeycomb

brass
black
white



Audette-Duo 4 up

230V/350mA - TRIAC/IGBT dimmable
4 x 6,25W (LED incl.)


2700K (4 x 633lm) or 3000K (4 x 673lm) - CRI >95 - IP50 - ◇

Beam: M = medium 23° or W = wide 40°

Also available with honeycomb

brass
black
white





Audette-Varié 1 up

230V/350mA - TRIAC/IGBT dimmable

1 x 6,25W (LED incl.)

2700K (633lm) or 3000K (673lm) - CRI >95 - **IP50** - ◇

Beam: M = medium 23° or W = wide 40°


brass

black

white



Also available with honeycomb



Audette-Varié 2 up

230V/350mA - TRIAC/IGBT dimmable

2 x 6,25W (LED incl.)

2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95 - **IP50** - ◇

Beam: M = medium 23° or W = wide 40°

brass

black

white



Also available with honeycomb



Audette-Varié 3 up

230V/350mA - TRIAC/IGBT dimmable

3 x 6,25W (LED incl.)

2700K (3 x 633lm) or 3000K (3 x 673lm) - CRI >95 - **IP50** - ◇

Beam: M = medium 23° or W = wide 40°


brass

black

white



Also available with honeycomb



Audette-Varié 4 up

230V/350mA - TRIAC/IGBT dimmable

4 x 6,25W (LED incl.)

2700K (4 x 633lm) or 3000K (4 x 673lm) - CRI >95 - **IP50** - ◇

Beam: M = medium 23° or W = wide 40°


brass

black

white



Also available with honeycomb



Audette 1 up Rounded

230V/350mA - TRIAC/IGBT dimmable

1 x 6,25W (LED incl.)

2700K (633lm) or 3000K (673lm) - CRI >95 - **IP50** - ◇

Beam: M = medium 23° or W = wide 40°

brass

black

white

gunmetal

bronze

nickel



Also available with honeycomb



Audette 2 up Rounded

230V/350mA - TRIAC/IGBT dimmable

2 x 6,25W (LED incl.)

2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95 - **IP50** - ◇

Beam: M = medium 23° or W = wide 40°

brass

black

white


gunmetal

bronze

nickel



Also available with honeycomb



Audette-Duo 1 up Rounded

230V/350mA - TRIAC/IGBT dimmable

1 x 6,25W (LED incl.)


2700K (633lm) or 3000K (673lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white



Also available with honeycomb



Audette-Duo 2 up Rounded

230V/350mA - TRIAC/IGBT dimmable

2 x 6,25W (LED incl.)


2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white



Also available with honeycomb



Audette-Varié 1 up Rounded

230V/350mA - TRIAC/IGBT dimmable

1 x 6,25W (LED incl.)


2700K (633lm) or 3000K (673lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white



Also available with honeycomb



Audette-Varié 2 up Rounded

230V/350mA - TRIAC/IGBT dimmable

2 x 6,25W (LED incl.)

2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white



Also available with honeycomb



Audette W1 in Rounded

500mA

1 x 4,32W (LED incl.)

2700K (487lm) or 3000K (517lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white
gunmetal
bronze
nickel



Also available with honeycomb



Audette-Duo W1 in Rounded

500mA

1 x 4,32W (LED incl.)

2700K (487lm) or 3000K (517lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white



Also available with honeycomb




Audette-Varié W1 in Rounded

500mA
1 x 4,32W (LED incl.)
2700K (487lm) or 3000K (517lm) - CRI >95 - **IP50** -
Beam: M = medium 23° or W = wide 40°

brass
black
white

Also available with honeycomb




Audette WD1 up Rounded

230V/500mA - TRIAC/IGBT dimmable
1 x 4,32W (LED incl.)
2700K (487lm) or 3000K (517lm) - CRI >95 - **IP50** -
Beam: M = medium 23° or W = wide 40°

brass
black
white
gunmetal
bronze
nickel

Also available with honeycomb



Audette-Duo WD1 up Rounded

230V/500mA - TRIAC/IGBT dimmable
1 x 4,32W (LED incl.)
2700K (487lm) or 3000K (517lm) - CRI >95 - **IP50** -
Beam: M = medium 23° or W = wide 40°

brass
black
white

Also available with honeycomb



Audette-Varié WD1 up Rounded

230V/500mA - TRIAC/IGBT dimmable
1 x 4,32W (LED incl.)
2700K (487lm) or 3000K (517lm) - CRI >95 - **IP50** -
Beam: M = medium 23° or W = wide 40°

brass
black
white

Also available with honeycomb



Audette Track 48V

48V/350mA
1 x 6,25W (LED incl.)
2700K (633lm) or 3000K (673lm) - CRI >95 - **IP50** -
Beam: M = medium 23° or W = wide 40°

brass
black
white
gunmetal
bronze
nickel

Also available with honeycomb



Audette-Duo Track 48V

48V/350mA
1 x 6,25W (LED incl.)
2700K (633lm) or 3000K (673lm) - CRI >95 - **IP50** -
Beam: M = medium 23° or W = wide 40°

brass
black
white

Also available with honeycomb



Audette-Varié Track 48V

48V/350mA

1 x 6,25W (LED incl.)

2700K (633lm) or 3000K (673lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white



Also available with honeycomb



Audinni

500mA

1 x 4,32W (LED incl.)

2700K (487lm) or 3000K (517lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white
gunmetal
bronze
nickel



Also available with honeycomb



Audinni BATHROOM/OUT

500mA

1 x 4,32W (LED incl.)

2700K (487lm) or 3000K (517lm) - CRI >95 - IP55 -

Beam: M = medium 23° or W = wide 40°

brass
black
white
gunmetal
bronze
nickel



Audinno

350mA

1 x 6,25W (LED incl.)

2700K (635lm) or 3000K (673m) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white
gunmetal
bronze
nickel



Also available with honeycomb



Audinno BATHROOM/OUT


350mA

1 x 6,25W (LED incl.)

2700K (635lm) or 3000K (673m) - CRI >95 - IP55 -

Beam: M = medium 23° or W = wide 40°

brass
black
white
gunmetal
bronze
nickel



Audy 1 up Rounded

230V/500mA - TRIAC/IGBT dimmable

1 x 4,32W (LED incl.)


2700K (487lm) or 3000K (517lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white
gunmetal
bronze
nickel



Also available with honeycomb



Audy 2 up Rounded

230V/500mA - TRIAC/IGBT dimmable


2 x 4,32W (LED incl.)

2700K (2 x 487lm) or 3000K (2 x 517lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white
gunmetal
bronze
nickel

Also available with honeycomb



Audy-Duo 1 up Rounded

230V/500mA - TRIAC/IGBT dimmable


1 x 4,32W (LED incl.)

2700K (487lm) or 3000K (517lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white

Also available with honeycomb



Audy-Duo 2 up Rounded

230V/500mA - TRIAC/IGBT dimmable

2 x 4,32W (LED incl.)

2700K (2 x 487lm) or 3000K (2 x 517lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white

Also available with honeycomb



Audy-In

350mA

1 x 6,25W (LED incl.)

2700K (633lm) or 3000K (673lm) - CRI >95 - IP50 -

Beam: M = medium 23° or W = wide 40°

brass
black
white
gunmetal
bronze
nickel

Also available with honeycomb



Audy-In BATHROOM/OUT


350mA

1 x 6,25W (LED incl.)

2700K (633lm) or 3000K (673lm) - 3000K - CRI >95 - IP55 -

Beam: M = medium 23° or W = wide 40°


brass
black
white
gunmetal
bronze
nickel



Audy-Solitaire RF

350mA
1 x 6,25W (LED incl.)
2700K (633lm) or 3000K (673lm) - CRI >95 - **IP40** - 
Beam: M = medium 23° or W = wide 40°
Possibility to shorten rod with tube cutter
Also available with honeycomb


brass 
black 
white 
gunmetal 
bronze 
nickel 



Audy-Solitaire RF D+B

230V/350mA - TRIAC/IGBT dimmable
1 x 6,25W (LED incl.)
2700K (633lm) or 3000K (673lm) - CRI >95 - **IP40** - 
Beam: M = medium 23° or W = wide 40°
Possibility to shorten rod with tube cutter
Also available with honeycomb


brass 
black 
white 
gunmetal 
bronze 
nickel 



Audy-Solitaire RL

350mA
1 x 6,25W (LED incl.)
2700K (633lm) or 3000K (673lm) - CRI >95 - **IP40** - 
Beam: M = medium 23° or W = wide 40°
Longer cable lengths available on demand
Also available with honeycomb


brass 
black 
white 
gunmetal 
bronze 
nickel 



Audy-Solitaire RL D+B

230V/350mA - TRIAC/IGBT dimmable
1 x 6,25W (LED incl.)
2700K (633lm) or 3000K (673lm) - CRI >95 - **IP40** - 
Beam: M = medium 23° or W = wide 40°
Longer cable lengths available on demand
Also available with honeycomb


brass 
black 
white 
gunmetal 
bronze 
nickel 



Audy-Solitaire RF 75/RF 100 Track 48V

48V/350mA
1 x 6,25W (LED incl.)
2700K (633lm) or 3000K (673lm) - CRI >95 - **IP40** - 
Beam: M = medium 23° or W = wide 40°
Also available with honeycomb

brass 
black 
white 
gunmetal 
bronze 
nickel 



Audy-Wall 1S

500mA
1 x 4,32W (LED incl.)
2700K (487lm) or 3000K (517lm) - CRI >95 - **IP50** - 
Beam: M = medium 23° or W = wide 40°

brass 
black 
white 
gunmetal 
bronze 
nickel 



Audy-Wall 1S Duo


500mA

1 x 4,32W (LED incl.)

2700K (487lm) or 3000K (517lm) - CRI >95 - **IP50** -

Beam: M = medium 23° or W = wide 40°

brass
black
white
gunmetal
bronze



Audy-Wall 2S


500mA

2 x 4,32W (LED incl.)

2700K (2 x 487lm) or 3000K (2 x 517lm) - CRI >95 - **IP50** -

Beam: M = medium 23° or W = wide 40°

brass
black
white
gunmetal
bronze
nickel



Audy-Wall 2S Duo

500mA

2 x 4,32W (LED incl.)

2700K (2 x 487lm) or 3000K (2 x 517lm) - CRI >95 - **IP50** -

Beam: M = medium 23° or W = wide 40°

brass
black
white
gunmetal
bronze



Aust-In

350mA

1 x 6W (LED incl.) 634lm

2700K - CRI >93 - **IP40** -

brass
black
white
gunmetal
bronze
nickel




Aust-In Adjustable

350mA

1 x 6W (LED incl.) - 634lm

2700K - CRI >93 - **IP40** -

brass
black
white
gunmetal
bronze
nickel




Aust-In Adjustable Track 48V

48V/350mA

1 x 6W (LED incl.) - 634lm

2700K - CRI >93 - **IP40** -

brass
black
white
gunmetal
bronze
nickel




Austere-Chandelier 1Y RF 75/RF 100

350mA
3 x 6W (LED incl.) - 3 x 634lm
2700K - CRI >93 - **IP50** -

Ø 590 mm / Ø 1090 mm / Ø 1590 mm

brass
black
gunmetal
bronze
nickel




Austere-Chandelier 1Y RS 16

350mA
3 x 6W (LED incl.) - 3 x 634lm
2700K - CRI >93 - **IP50** -

Ø 590 mm / Ø 1090 mm / Ø 1590 mm

brass
black
gunmetal
bronze
nickel




Austere-Chandelier 1Y RL 79

350mA
3 x 6W (LED incl.) - 3 x 634lm
2700K - CRI >93 - **IP50** -

Ø 590 mm / Ø 1090 mm / Ø 1590 mm

brass
black
gunmetal
bronze
nickel




Austere-Chandelier 2Y RF 75/RF 100

350mA
6 x 6W (LED incl.) - 6 x 634lm
2700K - CRI >93 - **IP50** -

Each arm on the same level has the same length:
Ø 590 mm / Ø 1090 mm / Ø 1590 mm

brass
black
gunmetal
bronze
nickel




Austere-Chandelier 2Y RS 16

350mA
6 x 6W (LED incl.) - 6 x 634lm
2700K - CRI >93 - **IP50** -

Each arm on the same level has the same length:
Ø 590 mm / Ø 1090 mm / Ø 1590 mm

brass
black
gunmetal
bronze
nickel




Austere-Chandelier 2Y RL 79

350mA
6 x 6W (LED incl.) - 6 x 634lm
2700K - CRI >93 - **IP50** -

Each arm on the same level has the same length:
Ø 590 mm / Ø 1090 mm / Ø 1590 mm

brass
black
gunmetal
bronze
nickel




Austere-Chandelier 3Y RF 75/RF 100

350mA
9 x 6W (LED incl.) - 9 x 634lm
2700K - CRI >93 - **IP50** -

Each arm on the same level has the same length:
Ø 590 mm / Ø 1090 mm / Ø 1590 mm

brass
black
gunmetal
bronze
nickel




Austere-Chandelier 3Y RS 16

350mA
9 x 6W (LED incl.) - 9 x 634lm
2700K - CRI >93 - **IP50** -

Each arm on the same level has the same length:
Ø 590 mm / Ø 1090 mm / Ø 1590 mm

brass
black
gunmetal
bronze
nickel




Austere-Chandelier 3Y RL 79

350mA
9 x 6W (LED incl.) - 9 x 634lm
2700K - CRI >93 - **IP50** -

Each arm on the same level has the same length:
Ø 590 mm / Ø 1090 mm / Ø 1590 mm

brass
black
gunmetal
bronze
nickel




Austere-Chandelier 1X RF 75/RF 100

350mA
4 x 6W (LED incl.) - 4 x 634lm
2700K - CRI >93 - **IP50** -

L : 516 mm / 949 mm / 1382 mm - W : 316 mm / 565 mm / 815 mm

brass
black
gunmetal
bronze
nickel




Austere-Chandelier 1X RS 16

350mA
4 x 6W (LED incl.) - 4 x 634lm
2700K - CRI >93 - **IP50** -

L : 516 mm / 949 mm / 1382 mm - W : 316 mm / 565 mm / 815 mm

brass
black
gunmetal
bronze
nickel




Austere-Chandelier 1X RL 79

350mA
4 x 6W (LED incl.) - 4 x 634lm
2700K - CRI >93 - **IP50** -

L : 516 mm / 949 mm / 1382 mm - W : 316 mm / 565 mm / 815 mm

brass
black
gunmetal
bronze
nickel



Austere-Chandelier 2X RF 75/RF 100


350mA
8 x 6W (LED incl.) - 8 x 634lm
2700K - CRI >93 - **IP50** - ☐

brass
black
gunmetal
bronze
nickel



Each arm on the same level has the same length:

L : 516 mm / 949 mm / 1382 mm - W : 316 mm / 565 mm / 815 mm



Austere-Chandelier 2X RS 16


350mA
8 x 6W (LED incl.) - 8 x 634lm
2700K - CRI >93 - **IP50** - ☐

brass
black
gunmetal
bronze
nickel



Each arm on the same level has the same length:

L : 516 mm / 949 mm / 1382 mm - W : 316 mm / 565 mm / 815 mm



Austere-Chandelier 2X RL 79


350mA
8 x 6W (LED incl.) - 8 x 634lm
2700K - CRI >93 - **IP50** - ☐

brass
black
gunmetal
bronze
nickel



Each arm on the same level has the same length:

L : 516 mm / 949 mm / 1382 mm - W : 316 mm / 565 mm / 815 mm



Austere-Chandelier 3X RF 75/RF 100


350mA
12 x 6W (LED incl.) - 12 x 634lm
2700K - CRI >93 - **IP50** - ☐

brass
black
gunmetal
bronze
nickel



Each arm on the same level has the same length:

L : 516 mm / 949 mm / 1382 mm - W : 316 mm / 565 mm / 815 mm



Austere-Chandelier 3X RS 16


350mA
12 x 6W (LED incl.) - 12 x 634lm
2700K - CRI >93 - **IP50** - ☐

brass
black
gunmetal
bronze
nickel



Each arm on the same level has the same length:

L : 516 mm / 949 mm / 1382 mm - W : 316 mm / 565 mm / 815 mm

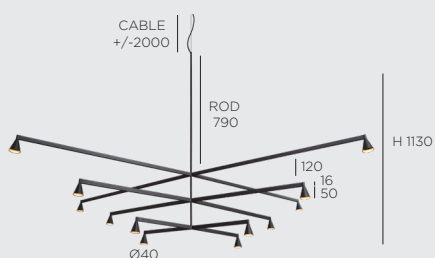

Austere-Chandelier 3X RL 79

350mA
12 x 6W (LED incl.) - 12 x 634lm
2700K - CRI >93 - **IP50** - ☐

brass
black
gunmetal
bronze
nickel



Each arm on the same level has the same length:

L : 516 mm / 949 mm / 1382 mm - W : 316 mm / 565 mm / 815 mm

Required cover/canopy for Austere-Chandelier with remote mounted driver:

Ø60
21



cover C6
false/concrete ceiling



For false ceiling:
RS 16, RL 79, RF 75 & RF 100


For concrete ceiling:
RS 16 & RL 79

- brass
black
white
gunmetal
bronze
nickel
- 

Ø80
51



cover C8
concrete ceiling




For RF 75 & RF 100

- brass
black
white
gunmetal
bronze
nickel
- 

Ø50
105



canopy B10
false/concrete ceiling




For RS 16, RL 79, RF 75 & RF 100

- brass
black
white
gunmetal
bronze
nickel
- 

Ø50
105



canopy B11
false/concrete ceiling



For RS 16 & RL 79


- brass
black
white
gunmetal
bronze
nickel
- 

Required base (driver incl.) for surface mounting Austere-Chandelier (only for RS 16 & RL 79):

Ø199
35 | 40



base B20




Dimmable driver incl. in base
(1-10V / PUSH-DIM / DALI / TRIAC / IGBT)
+ casambi possible
Only for 1Y, 2Y, 1X
Max. 6 light-elements

- black
white
- 

Ø199
40




base B21



Dimmable driver incl. in base
(1-10V / PUSH-DIM / DALI / TRIAC / IGBT)
+ casambi possible
Only for 1Y, 2Y, 1X
Max. 6 light-elements

- black
white
- 

Required base (driver incl.) for surface mounting Austere-Chandelier (only for RS 16 & RL 79):




base B32

non-dimmable driver incl. in base

black 

white 




base B50

dimmmable driver incl. in base
(1-10V / PUSH-DIM / DALI)
+ casambi possible

black 

white 



Austere-D1 3 RF 75/RF 100

230V/350mA - TRIAC/IGBT or 1-10V or PUSH-DIM or DALI dimmable
3 x 6W (LED incl.) - 3 x 634lm
2700K - CRI >93 - **IP50** - 

Position of the light fixture in the base can be adjusted

brass 


black 

white 

gunmetal 

bronze 

nickel 

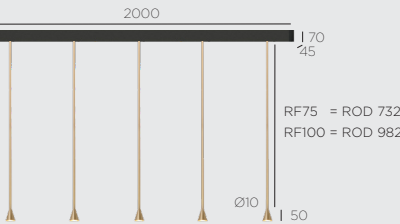

Austere-D2 5 RF 75/RF 100

230V/350mA - TRIAC/IGBT or 1-10V or PUSH-DIM or DALI dimmable
5 x 6W (LED incl.) - 5 x 634lm
2700K - CRI >93 - **IP50** - 

Position of the light fixture in the base can be adjusted

brass 


black 

white 

gunmetal 

bronze 

nickel 



Austere-D1 3 RL 79

230V/350mA - TRIAC/IGBT or 1-10V or PUSH-DIM or DALI dimmable
3 x 6W (LED incl.) - 3 x 634lm
2700K - CRI >93 - **IP50** - 

Longer cable lengths available on demand.
Position of the light fixture in the base can be adjusted

brass 


black 

white 

gunmetal 

bronze 

nickel 

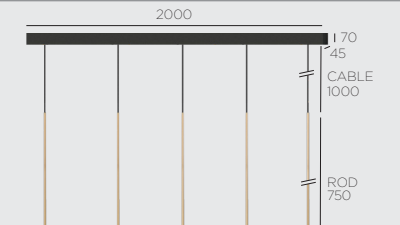

Austere-D2 5 RL 79

230V/350mA - TRIAC/IGBT or 1-10V or PUSH-DIM or DALI dimmable
5 x 6W (LED incl.) - 5 x 634lm
2700K - CRI >93 - **IP50** - 

Longer cable lengths available on demand
Position of the light fixture in the base can be adjusted

brass 

black 

white 

gunmetal 

bronze 

nickel 



Austere-Elements

350mA
per light-element: 6W (LED incl.) - 634lm
2700K - CRI >93 - IP50 - ☐

Design your own unique composition with our configurator:
www.elements-configurator.trizo21.com

brass
black
gunmetal
bronze
nickel



Austere-Elements Suspension



350mA
per light-element: 6W (LED incl.) - 634lm
2700K - CRI >93 - IP50 - ☐

Design your own unique composition with our configurator:
www.elements-configurator.trizo21.com


brass
black
gunmetal
bronze
nickel




Required cover/canopy for Austere-Elements with remote mounted driver:




brass
black
white
gunmetal
bronze
nickel



black
white




brass
black
white
gunmetal
bronze
nickel



black
white





Required base (driver incl.) for surface mounting Austere-Elements:




dimnable driver incl. in base
(1-10V / PUSH-DIM / DALI)
+ casambi possible
Min. 2 light-elements
Max. 6 light-elements

black ●
white ○




non-dimnable driver incl. in base
Min. 3 light-elements
Max. 12 light-elements

black ●
white ○



dimnable driver incl. in base
(1-10V / PUSH-DIM / DALI)
+ casambi possible
Min. 3 light-elements
Max. 12 light-elements


black ●
white ○

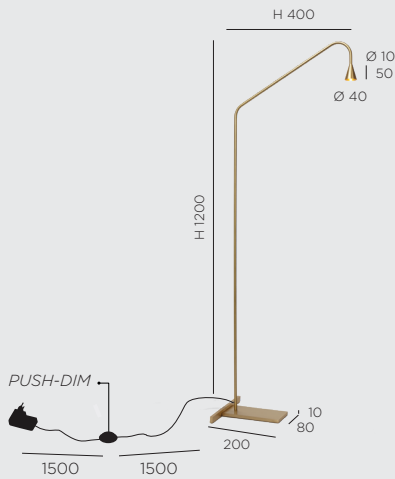

Austere-Floor

100V-240V/350mA - PUSH-DIM button on cable
1 x 6W (LED incl.) - 634lm
2700K - CRI >93 - IP40 - □

brass ●
black ●
white ○
gunmetal ●
bronze ●
nickel ○




Austere-Solitaire RF

350mA
1 x 6W (LED incl.) - 634lm
2700K - CRI >93 - IP40 -

Possibility to shorten rod with tube cutter

brass
black
white
gunmetal
bronze
nickel




Austere-Solitaire RF D+B

230V/350mA - TRIAC/IGBT dimmable
1 x 6W (LED incl.) - 634lm
2700K - CRI >93 - IP40 -

Possibility to shorten rod with tube cutter

brass
black
white
gunmetal
bronze
nickel




Austere-Solitaire RL

350mA
1 x 6W (LED incl.) - 634lm
2700K - CRI >93 - IP40 -

Longer cable lengths available on demand.

brass
black
white
gunmetal
bronze
nickel




Austere-Solitaire RL D+B

230V/350mA - TRIAC/IGBT dimmable
1 x 6W (LED incl.) - 634lm
2700K - CRI >93 - IP40 -

Longer cable lengths available on demand.


brass
black
white
gunmetal
bronze
nickel



Austere-Solitaire RF 75/RF 100 Track 48V

48V/350mA
1 x 6W (LED incl.) - 634lm
2700K - CRI >93 - IP40 -


brass
black
white
gunmetal
bronze
nickel

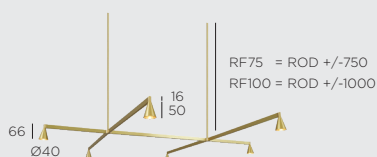

Austere-Suspension 1+ RF 75/RF 100

350mA
6 x 6W (LED incl.) - 6 x 634lm
2700K - CRI >93 - IP50 -
L : 1120 mm / 1370 mm / 1620 mm / 1870 mm
W : 590 mm / 1090 mm

brass
black
gunmetal
bronze
nickel



Austere-Suspension 1+ RS 16

350mA


6 x 6W (LED incl.) - 6 x 634lm

2700K - CRI >93 - IP50 - ☐

L : 1120 mm / 1370 mm / 1620 mm / 1870 mm

W : 590 mm / 1090 mm

brass
black
gunmetal
bronze
nickel



Austere-Suspension 1+ RL 79

350mA

6 x 6W (LED incl.) - 6 x 634lm

2700K - CRI >93 - IP50 - ☐

L : 1120 mm / 1370 mm / 1620 mm / 1870 mm

W : 590 mm / 1090 mm

brass
black
gunmetal
bronze
nickel




Required cover/canopy for Austere-Suspension with remote mounted driver:



cover C6
false ceiling


For RF 75 & RF 100

aperture : Ø45 - depth: min. 40mm



For RS 16 & RL 79

aperture : Ø45 - depth: min. 40mm




brass
black
white
gunmetal
bronze
nickel




cover C6
concrete ceiling

For RS 16 & RL 79

aperture : Ø45 - depth: min. 60mm




brass
black
white
gunmetal
bronze
nickel



cover C8
concrete ceiling

For RF 75 & RF 100

aperture : Ø30 - depth: min. 50mm




brass
black
white
gunmetal
bronze
nickel




canopy B10
false/concrete ceiling

For RF 75 & RF 100




For RS 16 & RL 79




brass
black
white
gunmetal
bronze
nickel






- brass
- black
- white
- gunmetal
- bronze
- nickel

Choose your base (driver incl.) for 'surface mounting' Austere-Suspension:




dimnable driver incl. in base
(1-10V / PUSH-DIM / DALI / TRIAC / IGBT)
+ casambi possible

- black
- white




non-dimnable driver incl. in base

- black
- white



dimnable driver incl. in base
(1-10V / PUSH-DIM / DALI)
+ casambi possible


- black
- white

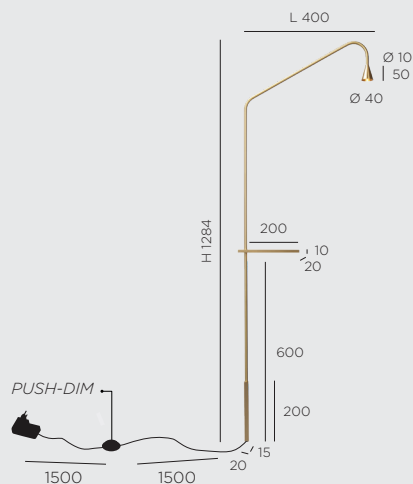

Austere-Table

100V-240V/350mA - PUSH-DIM button on cable
1 x 6W (LED incl.) - 634lm
2700K - CRI >93 - IP40 - □


- brass
- black
- white
- gunmetal
- bronze
- nickel

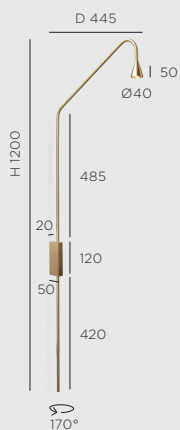

Austere-Wall built-in

350mA
1 x 6W (LED incl.) - 634lm
2700K - CRI >93 - **IP40** -


brass
black
white
gunmetal
bronze
nickel

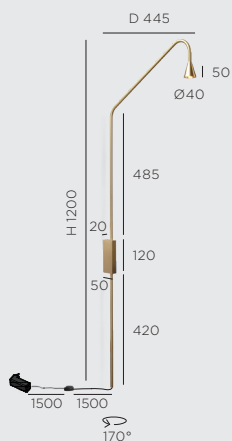

Austere-Wall plug

100V-240V/350mA - PUSH-DIM button dimmer on cable
1 x 6W (LED incl.) - 634lm
2700K - CRI >93 - **IP40** -


brass
black
white
gunmetal
bronze
nickel

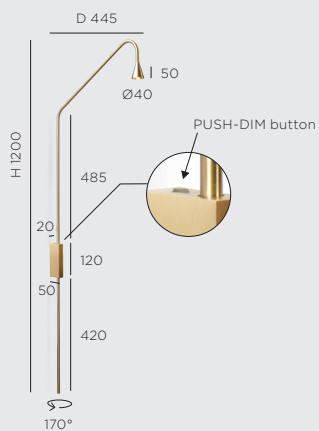

Austere-Wall push built-in

350mA - PUSH-DIM button on base
1 x 6W (LED incl.) - 634lm
2700K - CRI >93 - **IP40** -


brass
black
white
gunmetal
bronze
nickel

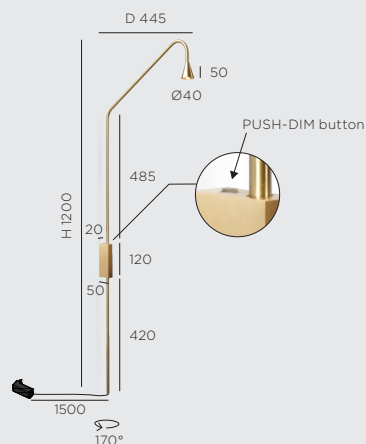

Austere-Wall push plug

100V-240V/350mA - PUSH-DIM button on base
 1 x 6W (LED incl.) - 634lm
 2700K - CRI >93 - **IP40** -

brass
 black
 white
 gunmetal
 bronze
 nickel



Bilo C in FROSTED 27K

350mA
 1 x 21 LED 0,14 (LED incl.) - 400lm
 2700K - CRI >90 - **IP50** -

black
 white
 bronze
 gold
 alu

Bilo C in FROSTED 30K

350mA
 1 x 21 LED 0,14 (LED incl.) - 400lm
 3000K - CRI >90 - **IP50** -

black
 white
 bronze
 gold
 alu

Bilo C in FROSTED 27K BATHROOM/OUT


350mA
 1 x 21 LED 0,14 (LED incl.) - 400lm
 2700K - CRI >90 - **IP65** -

black
 white
 bronze
 gold
 alu

Bilo C in FROSTED 30K BATHROOM/OUT

350mA
 1 x 21 LED 0,14 (LED incl.) - 400lm
 3000K - CRI >90 - **IP65** -

black
 white
 bronze
 gold
 alu



Bilo C in MATT 27K

350mA
1 x 21 LED 0,14 (LED incl.) - 400lm
2700K - CRI >90 - **IP50** -

black
white
bronze
gold
alu

Bilo C in MATT 30K

350mA
1 x 21 LED 0,14 (LED incl.) - 400lm
3000K - CRI >90 - **IP50** -

black
white
bronze
gold
alu

Bilo C in MATT 27K BATHROOM/OUT


350mA
1 x 21 LED 0,14 (LED incl.) - 400lm
2700K - CRI >90 - **IP65** -

black
white
bronze
gold
alu

Bilo C in MATT 30K BATHROOM/OUT

350mA
1 x 21 LED 0,14 (LED incl.) - 400lm
3000K - CRI >90 - **IP65** -

black
white
bronze
gold
alu



Bilo up FROSTED 27K

230V/350mA - TRIAC/IGBT dimmable
1 x 21 LED 0,14 (LED incl.) - 400lm
2700K - CRI >90 - **IP50** -

black
white
bronze
gold
alu

Bilo up FROSTED 30K

230V/350mA - TRIAC/IGBT dimmable
1 x 21 LED 0,14 (LED incl.) - 400lm
3000K - CRI >90 - **IP50** -

black
white
bronze
gold
alu

Bilo up FROSTED 27K BATHROOM/OUT


230V/350mA - TRIAC/IGBT dimmable
1 x 21 LED 0,14 (LED incl.) - 400lm
2700K - CRI >90 - **IP65** -

black
white
bronze
gold
alu

Bilo up FROSTED 30K BATHROOM/OUT

230V/350mA - TRIAC/IGBT dimmable
1 x 21 LED 0,14 (LED incl.) - 400lm
3000K - CRI >90 - **IP65** -

black
white
bronze
gold
alu



Bilo up MATT 27K

230V/350mA - TRIAC/IGBT dimmable
1 x 21 LED 0,14 (LED incl.) - 400lm
2700K - CRI >90 - **IP50** - ◇

black ●
white ○
bronze ●
gold ●
alu ●

Bilo up MATT 30K

230V/350mA - TRIAC/IGBT dimmable
1 x 21 LED 0,14 (LED incl.) - 400lm
3000K - CRI >90 - **IP50** - ◇

black ●
white ○
bronze ●
gold ●
alu ●

Bilo up MATT 27K BATHROOM/OUT


230V/350mA - TRIAC/IGBT dimmable
1 x 21 LED 0,14 (LED incl.) - 400lm
2700K - CRI >90 - **IP65** - ◇

black ●
white ○
bronze ●
gold ●
alu ●

Bilo up MATT 30K BATHROOM/OUT

230V/350mA - TRIAC/IGBT dimmable
1 x 21 LED 0,14 (LED incl.) - 400lm
3000K - CRI >90 - **IP65** - ◇

black ●
white ○
bronze ●
gold ●
alu ●



Bilo W in FROSTED 27K

150mA - non-dimmable
1 x 21 LED 0,06W (LED incl.) - 170lm
2700K - CRI >90 - **IP50** - ◇
or
350mA - dimmable
1 x 21 LED 0,14 (LED incl.) - 400lm
2700K - CRI >90 - **IP50** - ◇

black ●
white ○
bronze ●
gold ●
alu ●

Bilo W in FROSTED 30K


150mA - non-dimmable
1 x 21 LED 0,06W (LED incl.) - 170lm
3000K - CRI >90 - **IP50** - ◇
or
350mA - dimmable
1 x 21 LED 0,14 (LED incl.) - 400lm
3000K - CRI >90 - **IP50** - ◇

black ●
white ○
bronze ●
gold ●
alu ●

Bilo W in FROSTED 27K BATHROOM/OUT

150mA - non-dimmable
1 x 21 LED 0,06W (LED incl.) - 170lm
2700K - CRI >90 - **IP65** - ◇
or
350mA - dimmable
1 x 21 LED 0,14 (LED incl.) - 400lm
2700K - CRI >90 - **IP65** - ◇


black ●
white ○
bronze ●
gold ●
alu ●



Bilo W in FROSTED 30K BATHROOM/OUT

150mA - non-dimmable
 1 x 21 LED 0,06W (LED incl.) - 170lm
 3000K - CRI >90 - **IP65** - 
 or
 350mA - dimmable
 1 x 21 LED 0,14 (LED incl.) - 400lm
 3000K - CRI >90 - **IP65** - 

black 
 white 
 bronze 
 gold 
 alu 



Bilo W in MATT 27K

150mA - non-dimmable
 1 x 21 LED 0,06W (LED incl.) - 170lm
 2700K - CRI >90 - **IP50** - 
 or
 350mA - dimmable
 1 x 21 LED 0,14 (LED incl.) - 400lm
 2700K - CRI >90 - **IP50** - 

black 
 white 
 bronze 
 gold 
 alu 

Bilo W in MATT 30K

150mA - non-dimmable
 1 x 21 LED 0,06W (LED incl.) - 170lm
 3000K - CRI >90 - **IP50** - 
 or
 350mA - dimmable
 1 x 21 LED 0,14 (LED incl.) - 400lm
 3000K - CRI >90 - **IP50** - 

black 
 white 
 bronze 
 gold 
 alu 

Bilo W in MATT 27K BATHROOM/OUT


150mA - non-dimmable
 1 x 21 LED 0,06W (LED incl.) - 170lm
 2700K - CRI >90 - **IP65** - 
 or
 350mA - dimmable
 1 x 21 LED 0,14 (LED incl.) - 400lm
 2700K - CRI >90 - **IP65** - 

black 
 white 
 bronze 
 gold 
 alu 

Bilo W in MATT 30K BATHROOM/OUT

150mA - non-dimmable
 1 x 21 LED 0,06W (LED incl.) - 170lm
 3000K - CRI >90 - **IP65** - 
 or
 350mA - dimmable
 1 x 21 LED 0,14 (LED incl.) - 400lm
 3000K - CRI >90 - **IP65** - 

black 
 white 
 bronze 
 gold 
 alu 



Bily 16 in


350mA
1 x 11W (LED incl.) - 1125lm
2700K - CRI >97 - **IP50** -

black
white
bronze
gold
alu

Bily 16 in BATHROOM/OUT

350mA
1 x 11W (LED incl.) - 1125lm
2700K - CRI >97 - **IP65** -

black
white
bronze
gold
alu



Bily 16 up


230V/350mA - TRIAC/IGBT dimmable
1 x 11W (LED incl.) - 1125lm
2700K - CRI >97 - **IP50** -

black
white
bronze
gold
alu

Bily 16 up BATHROOM/OUT

230V/350mA - TRIAC/IGBT dimmable
1 x 11W (LED incl.) - 1125lm
2700K - CRI >97 - **IP55** -

black
white
bronze
gold
alu



Boulo C in FROSTED 27K

350mA
1 x 21 LED 0,14 (LED incl.) - 400lm
2700K - CRI >90 - **IP50** -

Boulo C in FROSTED 30K


350mA
1 x 21 LED 0,14 (LED incl.) - 400lm
3000K - CRI >90 - **IP50** -

Boulo C in FROSTED 27K BATHROOM/OUT

350mA
1 x 21 LED 0,14 (LED incl.) - 400lm
2700K - CRI >90 - **IP65** -

Boulo C in FROSTED 30K BATHROOM/OUT

350mA
1 x 21 LED 0,14 (LED incl.) - 400lm
3000K - CRI >90 - **IP65** -



Boulo C in MATT 27K

350mA
 1 x 21 LED 0,14 (LED incl.) - 400lm
 2700K - CRI >90 - **IP50** -

Boulo C in MATT 30K


350mA
 1 x 21 LED 0,14 (LED incl.) - 400lm
 3000K - CRI >90 - **IP50** -

Boulo C in MATT 27K BATHROOM/OUT

350mA
 1 x 21 LED 0,14 (LED incl.) - 400lm
 2700K - CRI >90 - **IP65** -

Boulo C in MATT 30K BATHROOM/OUT

350mA
 1 x 21 LED 0,14 (LED incl.) - 400lm
 3000K - CRI >90 - **IP65** -




Boulo W in FROSTED 27K

150mA - non-dimmable
 1 x 21 LED 0,06W (LED incl.) - 170lm
 2700K - CRI >90 - **IP50** -
 or
 350mA - dimmable
 1 x 21 LED 0,14 (LED incl.) - 400lm
 2700K - CRI >90 - **IP50** -

Boulo W in FROSTED 30K

150mA - non-dimmable
 1 x 21 LED 0,06W (LED incl.) - 170lm
 3000K - CRI >90 - **IP50** -
 or
 350mA - dimmable
 1 x 21 LED 0,14 (LED incl.) - 400lm
 3000K - CRI >90 - **IP50** -




Boulo W in FROSTED 27K BATHROOM/OUT

150mA - non-dimmable
 1 x 21 LED 0,06W (LED incl.) - 170lm
 2700K - CRI >90 - **IP65** - 
 or
 350mA - dimmable
 1 x 21 LED 0,14 (LED incl.) - 400lm
 2700K - CRI >90 - **IP65** - 

Boulo W in FROSTED 30K BATHROOM/OUT

150mA - non-dimmable
 1 x 21 LED 0,06W (LED incl.) - 170lm
 3000K - CRI >90 - **IP65** - 
 or
 350mA - dimmable
 1 x 21 LED 0,14 (LED incl.) - 400lm
 3000K - CRI >90 - **IP65** - 



Bouly 16


350mA
 1 x 11W (LED incl.) - 1125lm
 2700K - CRI >97 - **IP50** - 

LED holder:
 silver 
 gold 

Bouly 16 BATHROOM/OUT

350mA
 1 x 11W (LED incl.) - 1125lm
 2700K - CRI >97 - **IP65** - 

LED holder:
 silver 
 gold 



Bouly 4

350mA
 4 x 0,96W (LED incl.) - 456lm
 2700K - CRI >93 - **IP50** - 
 Beam: N = narrow 10° or M = medium 25° or W = wide 40°

LED holder:
 silver 

Bouly 4 BATHROOM/OUT

350mA
 4 x 0,96W (LED incl.) - 456lm
 2700K - CRI >93 - **IP65** - 
 Beam: N = narrow 10° or M = medium 25° or W = wide 40°


LED holder:
 silver 



Bouly Table

230V/350mA - PUSH-DIM button on cable
 4 x 0.96W (LED incl.) - 456lm
 2700K - CRI >93 - **IP40** -
 Beam: 40°


black
 white
 grey
 chrome



Bouly W/C

350mA
 4 x 0.96W (LED incl.) - 456lm
 2700K - CRI >93 - **IP50** -
 Beam: 40°

black
 white
 grey
 chrome



Bouly W/C D+B

230V/350mA - non-dimmable
 4 x 0.96W (LED incl.) - 456lm
 2700K - CRI >93 - **IP50** -
 Beam: 40°

black
 white
 grey
 chrome



Code 1 GU10

230V - GU10
 1 x QPAR16 max. 50W or 1 x GU10 LED - **IP50** -

black
 white
 alu
 bronze
 chrome



Code 1 GU10 BATHROOM/OUT

230V - GU10
 1 x HALO QPAR16 max. 35W or 1 x GU10 LED - **IP55** -

black
 white
 alu



Code 1 LED

230V/350mA - non-dimmable or IGBT dimmable
 4 x 0.96W (LED incl.) - 456lm
 2700K - CRI >93 - **IP40** -
 Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
 white
 alu
 bronze
 chrome



Code 1 LED BATHROOM/OUT

230V/350mA - non-dimmable

4 x 0.96W (LED incl.) - 456lm

2700K - CRI >93 - **IP55** - ◇

Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu




Code 2 GU10

230V - GU10

2 x QPAR16 max. 50W or 2 x GU10 LED - **IP20** - ◇

black
white
alu
bronze
chrome




Code 2 GU10 BATHROOM/OUT

230V - GU10

2 x HALO QPAR16 max. 35W or 2 x GU10 LED - **IP55** - ◇

black
white
alu



Code 2 LED


230V/350mA - TRIAC/IGBT dimmable

8 x 0.96W (LED incl.) - 912lm

2700K - CRI >93 - **IP40** - ◇

Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu
bronze
chrome



Code 2 LED BATHROOM/OUT


230V/350mA - non-dimmable

8 x 0.96W (LED incl.) - 912lm

2700K - CRI >93 - **IP55** - ◇

Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu



Code W G9


230V - G9

1 x HALO QT14 max. 60W or 1 x G9 LED (max. Ø19, max. L 62mm)

IP50 - ◇

black
white
alu
bronze
chrome






Code W G9 BATHROOM/OUT

230V - G9

1 x HALO QT14 max. 60W or 1 x G9 LED (max. Ø19, max. L 62mm)

IP55 -

black
white
alu



Code W LED

350mA


1 lighting side : 4 x 0.96W (LED incl.) - 456lm

2 lighting sides : 8 x 0.96W (LED incl.) - 2 x 456lm

2700K - CRI >93 - IP50 -

Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu



Code W LED BATHROOM/OUT

350mA


1 lighting side : 4 x 0.96W (LED incl.) - 456lm

2 lighting sides : 8 x 0.96W (LED incl.) - 2 x 456lm

2700K - CRI >93 - IP55 -

Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu



I-Tro


24Vdc

1 lighting side : 120 x SMD LED 30W (LED incl.) - 2280lm

2 lighting sides : 240 x SMD LED 60W - 4560lm

2850K - CRI >90 - IP30 -

black
white



I-Tro D+B


100V-240V/24Vdc - 1-10V dimmable

1 lighting side : 120 x SMD LED 30W (LED incl.) - 2280lm

2 lighting sides : 240 x SMD LED 60W - 4560lm

2850K - CRI >90 - IP30 -

black
white



Kwa-Kwa 1F Round

12V - G53

1 x R111 HALO max. 75W or R111 LED - IP20 -

alu





Kwa-Kwa 1F Square

12V - G53

1 x R111 HALO max. 75W or R111 LED - IP20 -

alu



Kwa-Kwa 1F +B round

12V - G53

1 x R111 HALO max. 75W or R111 LED - IP20 -

alu



Kwa-Kwa 1FT rounded LED

230V - IGBT dimmable - G53

1 x R111 LED max. 60W - IP20 -

alu




Kwa-Kwa 1FT rectangular LED

230V - TRIAC/IGBT dimmable - G53

1 x R111 LED max. 60W - IP20 -

alu




Kwa-Kwa 2FT rounded LED

230V - TRIAC/IGBT dimmable - G53

2 x R111 LED max. 45W - IP20 -

alu



Kwa-Kwa 2FT rectangular LED

230V - TRIAC/IGBT dimmable - G53

2 x R111 LED max. 45W - IP20 -

alu





Kwa-Kwa 4FT rounded LED

230V - TRIAC/IGBT dimmable - G53
4 x R111 LED max. 45W - **IP20** - ◇


alu



Mini-Pi 1 in

350mA
4 x 0.96W (LED incl.) - 456lm
2700K - CRI >93 - **IP40** - ◇
Beam: N = narrow 10° or M = medium 25° or W = wide 40°


black
white
alu
bronze



Mini-Pi 1 up

230V/350mA - non-dimmable or IGBT dimmable
4 x 0.96W (LED incl.) - 456lm
2700K - CRI >93 - **IP40** - ◇
Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu
bronze



Mini-Pi 1 up round

230V/350mA - non-dimmable
4 x 0.96W (LED incl.) - 456lm
2700K - CRI >93 - **IP40** - ◇
Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu
bronze



Mini-Pi 2 in

350mA
8 x 0.96W (LED incl.) - 2 x 456lm
2700K - CRI >93 - **IP40** - ◇
Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu
bronze



Mini-Pi 2 up

230V/350mA - TRIAC/IGBT dimmable
8 x 0.96W (LED incl.) - 2 x 456lm
2700K - CRI >93 - **IP40** - ◇
Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu
bronze





Mini-Pi 3 up

230V/350mA - TRIAC/IGBT dimmable or
110V-230V/350mA - 1-10V or PUSH-DIM dimmable
12 x 0,96W (LED incl.) - 3 x 456lm
2700K - CRI >93 - **IP40** - ◇
Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu
bronze



Mini-Pi 1 Track 48V

48V/350mA
4 x 0,96W (LED incl.) - 456lm
2700K - CRI >93 - **IP40** - ◇
Beam: N = narrow 10° or M = medium 25° or W = wide 40°


black
white
alu
bronze



Mini-Pi 2 Track 48V

48V/350mA
8 x 0,96W (LED incl.) - 2 x 456lm
2700K - CRI >93 - **IP40** - ◇
Beam: N = narrow 10° or M = medium 25° or W = wide 40°


black
white
alu
bronze



Naga

110V-230V - GU10 LED - **IP20** - ◇


black
white
bronze
gold



N-Tro

24Vdc
240 x SMD LED 60W (LED incl.) - 4560lm
2850K - CRI >90 - **IP30** - ◇

black
white



N-Tro D+B

100V-240V/24Vdc - 1-10V dimmable
240 x SMD LED 60W (LED incl.) - 4560lm
2850K - CRI >90 - **IP30** - ◇

black
white





Pin-In 1

12V - G53

1 x R111 max. 100W or R111 LED - IP20 -

black
white
alu
bronze
chrome



Pin-In 2

12V - G53

2 x R111 max. 100W or R111 LED - IP20 -

black
white
alu
bronze
chrome



Pin-Up 1 Round LED

230V - IGBT dimmable - G53

1 x R111 LED max. 60W - IP20 -

black
white
alu
bronze
chrome




Pin-Up 1 Square LED

230V - IGBT dimmable - G53

1 x R111 LED max. 60W - IP20 -

black
white
alu
bronze
chrome



Pin-Up 2 LED

230V - TRIAC/IGBT dimmable - G53

2 x R111 LED max. 45W - IP20 -

black
white
alu
bronze
chrome




Pin-Up 4 LED

230V - TRIAC/IGBT dimmable - G53

4 x R111 LED max. 45W - IP20 -

black
white
alu
bronze
chrome

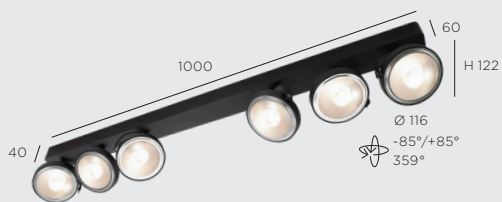

Pin-Up 6 LED

230V - TRIAC/IGBT dimmable - G53
6 x R111 LED max. 45W - **IP20** -

black
white
alu
bronze
chrome



R51 in GU10

230V - GU10
1 x HALO QPAR16 (alu reflector / no cool beam) max. 50W or
1 x GU10 LED - **IP20** -

black
white
chrome



R51 in LED

350mA
4 x 0.96W (LED incl.) - 456lm
2700K - CRI >93 - **IP40** -

black
white
chrome



R51 Rimless LED

350mA
4 x 0.96W (LED incl.) - 456lm
2700K - CRI >93 - **IP40** -

black
white



R51 up GU10

230V - GU10
1 x HALO QPAR16 (alu reflector / no cool beam) max. 50W or
1 x GU10 LED max. 20W - **IP20** -


black
white



R51 up LED

230V/350mA - non-dimmable or IGBT dimmable
4 x 0.96W (LED incl.) - 456lm
2700K - CRI >93 - **IP40** -


black
white



R52 in GU10

230V - GU10
2 x HALO QPAR16 (alu reflector / no cool beam) max. 50W or
2 x GU10 LED - **IP20** -


black
white
chrome



R52 in LED

350mA
8 x 0.96W (LED incl.) - 2 x 456lm
2700K - CRI >93 - **IP40** -

black
white
chrome



R52 Rimless LED

350mA
8 x 0.96W (LED incl.) - 2 x 456lm
2700K - CRI >93 - **IP40** -

black
white



R52 up GU10

230V - GU10
2 x HALO QPAR16 (alu reflector / no cool beam) max. 50W or
2 x GU10 LED max. 20W - **IP20** -


black
white



R52 up LED

230V/350mA - TRIAC/IGBT or 1-10V, PUSH-DIM dimmable
8 x 0.96W (LED incl.) - 2 x 456lm
2700K - CRI >93 - **IP40** -


black
white



R54 in GU10

230V - GU10
4 x HALO QPAR16 (alu reflector / no cool beam) max. 50W or
4 x GU10 LED - **IP20** -


black
white
chrome



R54 in LED

350mA
16 x 0.96W (LED incl.) - 4 x 456lm
2700K - CRI >93 - **IP40** -

black
white
chrome



R54 Rimless LED

350mA
16 x 0.96W (LED incl.) - 4 x 456lm
2700K - CRI >93 - **IP40** -

black
white



R54 up GU10

230V - GU10
4 x HALO QPAR16 (alu reflector / no cool beam) max. 50W or
4 x GU10 LED max. 20W - **IP20** -

black
white



R54 up LED

230V/350mA - TRIAC/IGBT or 1-10V, PUSH-DIM dimmable
16 x 0.96W (LED incl.) - 4 x 456lm
2700K - CRI >93 - **IP40** -

black
white



R110 in G53

12V - G53
1 x R111 max. 100W or R111 LED - **IP20** -

black
white
chrome



R110 Rimless

12V - G53
1 x R111 max. 100W or R111 LED - **IP20** -

black
white
chrome



R110 up G53 LED

230V - TRIAC/IGBT dimmable

G53 - 1 x R111 LED max. 60W - **IP20** -

black
white



R111 in G53

12V - G53

2 x R111 max. 100W or R111 LED - **IP20** -

black
white
chrome



R111 Rimless

12V - G53

2 x R111 max. 100W or R111 LED - **IP20** -

black
white
chrome




R111 up G53 LED

230V - TRIAC/IGBT dimmable - G53

2 x R111 LED max. 45W - **IP20** -

black
white



Scar-Led IFD built-in 45

110V-230V/350mA - non-dimmable

1 x 0.96W (LED incl.) - 114lm

or 230V/500mA - 1-10V or PUSH-DIM or DALI dimmable

1 x 1.38W (LED incl.) - 157lm

2700K - CRI >93 - **IP50** -

Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu
bronze



Scar-Led IFD built-in 60

110V-230V/350mA - non-dimmable

1 x 0.96W (LED incl.) - 114lm

or 230V/500mA - 1-10V or PUSH-DIM or DALI dimmable


1 x 1.38W (LED incl.) - 157lm

2700K - CRI >93 - **IP50** -

Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu
bronze





Scar-Led 1FD built-in 95

110V-230V/350mA - non-dimmable

1 x 0.96W (LED incl.) - 114lm

or 230V/500mA - 1-10V or PUSH-DIM or DALI dimmable

1 x 1.38W (LED incl.) - 157lm

2700K - CRI >93 - **IP50** -

Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu
bronze



Scar-Led 1FD built-up


110V-230V/350mA - non-dimmable

1 x 0.96W (LED incl.) - 114lm

2700K - CRI >93 - **IP50** -

Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu
bronze



Scar-Led 1FDS built-in 60

110V-230V/350mA - ON/OFF on armature

1 x 0.96W (LED incl.) - 114lm

or 230V/500mA - PUSH-DIM on armature

1 x 1.38W (LED incl.) - 157lm

2700K - CRI >93 - **IP50** -

Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu
bronze



Scar-Led 1FDS built-in 95

110V-230V/350mA - ON/OFF on armature

1 x 0.96W (LED incl.) - 114lm


or 230V/500mA - PUSH-DIM on armature

1 x 1.38W (LED incl.) - 157lm

2700K - CRI >93 - **IP50** -

Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu
bronze



Scar-Led 1FDS built-up


110V-230V/350mA - ON/OFF on armature

1 x 0.96W (LED incl.) - 114lm

2700K - CRI >93 - **IP50** -

Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu
bronze



Scar-Led 1FDS built-up plug

110V-230V/350mA - ON/OFF on armature


1 x 0.96W (LED incl.) - 114lm

2700K - CRI >93 - **IP50** -

Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black
white
alu
bronze






Scar-Led Table

230V/350mA - EU-plugdriver with switch on cable
 1 x 0.96W (LED incl.) - 114lm
 2700K - CRI >93 - **IP40** - 
 Beam: N = narrow 10° or M = medium 25° or W = wide 40°

black 
 white 
 alu 
 bronze 



Scar-Lite 1FD built-in

110V-230V/350mA - non-dimmable
 1 x 0.96W (LED incl.) - 114lm
 or 230V/500mA - 1-10V or PUSH-DIM or DALI dimmable
 1 x 1.38W (LED incl.) - 157lm
 2700K - CRI >93 - **IP50** - 
 Beam: 42°


black 
 white 
 bronze 



Scar-Lite 1FDS built-in

110V-230V/350mA - ON/OFF on armature
 1 x 0.96W (LED incl.) - 114lm
 or 230V/500mA - PUSH-DIM on armature
 1 x 1.38W (LED incl.) - 157lm
 2700K - CRI >93 - **IP50** - 
 Beam: 42°


black 
 white 
 bronze 



Scar-Lite 1FDS built-up

110V-230V/350mA - ON/OFF on armature
 1 x 0.96W (LED incl.) - 114lm
 or 230V/500mA - PUSH-DIM on armature
 1 x 1.38W (LED incl.) - 157lm
 2700K - CRI >93 - **IP50** - 
 Beam: 42°


black 
 white 
 bronze 



Scar-Lite 1FDS built-up plug

110V-230V/350mA - EU-plug - ON/OFF on armature
 1 x 0.96W (LED incl.) - 114lm
 or 230V/500mA - EU-plug - PUSH-DIM on armature
 1 x 1.38W (LED incl.) - 157lm
 2700K - CRI >93 - **IP50** - 
 Beam: 42°

black 
 white 
 bronze 



Scar-Lite 1FDS USB built-up

110V-230V/500mA - PUSH-DIM on armature
 1 x 1.38W (LED incl.) - 157lm
 2700K - CRI >93 - **IP40** - 
 USB charger 5V incl. - compatible with tablets/smartphones and other USB chargeable devices
 Beam: 42°

black 
 white 
 bronze 



Sirens SU diffuser glass

110V-230V - E27 - only energy saving bulbs (LED or FLUO)

IP50 - ◇

bulb size for Ø 210: max. Ø 45 mm L: 115mm

bulb size for Ø 265: max. Ø 60mm L: 175mm

black
white
copper



Sirens SU FROSTED glass big mirror + edge mirror

110V-230V - E27 - only energy saving bulbs (LED or FLUO)

IP50 - ◇

bulb size for Ø 210: max. Ø 45 mm L: 115mm

bulb size for Ø 265: max. Ø 60mm L: 175mm

black
white
copper



Sirens SU FROSTED glass edge mirror

110V-230V - E27 - only energy saving bulbs (LED or FLUO)

IP50 - ◇

bulb size for Ø 210: max. Ø 45 mm L: 115mm

bulb size for Ø 265: max. Ø 60mm L: 175mm

black
white
copper



Sirens SU FROSTED glass small mirror + edge mirror

110V-230V - E27 - only energy saving bulbs (LED or FLUO)

IP50 - ◇

bulb size for Ø 210: max. Ø 45 mm L: 115mm


bulb size for Ø 265: max. Ø 60mm L: 175mm

black
white
copper



Sirens SU mirror

black
white
copper



Sirens W/C diffuser glass

110V-230V - E27 - only energy saving bulbs (LED or FLUO)

IP50 - ◇

bulb size for Ø 210: max. Ø 45 mm L: 115mm

bulb size for Ø 265: max. Ø 60mm L: 175mm

black
white
copper





Sirens W/C FROSTED glass big mirror + edge mirror


110V-230V - E27 - only energy saving bulbs (LED or FLUO)

IP50 -

bulb size for Ø 210: max. Ø 45 mm L: 115mm

bulb size for Ø 265: max. Ø 60mm L: 175mm

black
white
copper



Sirens W/C FROSTED glass edge mirror


110V-230V - E27 - only energy saving bulbs (LED or FLUO)

IP50 -

bulb size for Ø 210: max. Ø 45 mm L: 115mm

bulb size for Ø 265: max. Ø 60mm L: 175mm

black
white
copper



Sirens W/C FROSTED glass small mirror + edge mirror


110V-230V - E27 - only energy saving bulbs (LED or FLUO)

IP50 -

bulb size for Ø 210: max. Ø 45 mm L: 115mm

bulb size for Ø 265: max. Ø 60mm L: 175mm

black
white
copper



Sirens W/C mirror

IP50 -

black
white
copper



Trizo21 | Kerrebroek 52 | B-9850 Deinze | Belgium

T +32 (0)9 380 43 43

E info@trizo21.com

W www.trizo21.com

W www.elements-configurator.trizo21.com

 [instagram.com/trizo21](https://www.instagram.com/trizo21)

 [facebook.com/trizo21](https://www.facebook.com/trizo21)

All models | Copyright & all rights reserved © Trizo21 & Bruno Van Meenen

All products | Handmade in Belgium

Catalogue | 2024

All information in this catalogue is without engagement, replaces all preceding information and can always be modified.

Trizo21 bvba has the right to change the technical aspects of its products at any time without prior notice.

All our product carry the CE logo. The CE logo represents an implicit quality assurance.

For further technical information, please visit www.trizo21.com

No part of this catalogue may be reproduced without written authorisation of Trizo21 bvba.



